



OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

LG Display

LB315WRM-SVA1

HD-10-160

Product specification

SPECIFICATION FOR APPROVAL

- () Preliminary specification
 (●) Final specification

Title	31.5" UHD TFT LCD
-------	-------------------

BUYER	General
MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LB315WRM
SUFFIX	SVA1

*When you obtain standard approval,
 please use the above model name without suffix

APPROVED BY	SIGNATURE DATE
/	
/	
/	
Please return 1 copy for your confirmation with your signature and comments.	

APPROVED BY	SIGNATURE DATE
S.H. Lee / G.Manager	
REVIEWED BY	
G.J. Han / Manager [C]	
Y.H. Hwang / Manager [M]	
S.H. Han / Manager [O]	
H.S. Kang / Manager [P]	
PREPARED BY	
C.Y. Sung / Engineer	
Product engineering dept. LG Display Co., Ltd	






Product specification

Contents

No	ITEM	Page
	Cover	1
	Contents	2
	Record of revisions	3
1	General description	4
2	Absolute maximum ratings	5
3	Electrical specifications	6
3-1	Electrical characteristics	6
3-2	Interface connections	9
3-3	Signal timing specifications	13
3-4	Color input data reference	14
3-5	Power sequence	15
3-6	V _{LCD} Power dip condition	16
4	Optical specifications	17
5	Mechanical characteristics	21
6	Reliability	24
7	International standards	25
7-1	Safety	25
7-2	Environment	25
8	Packing	26
8-1	Designation of lot mark	26
8-2	Packing form	27
9	Precautions	28





Product specification

Record of revisions

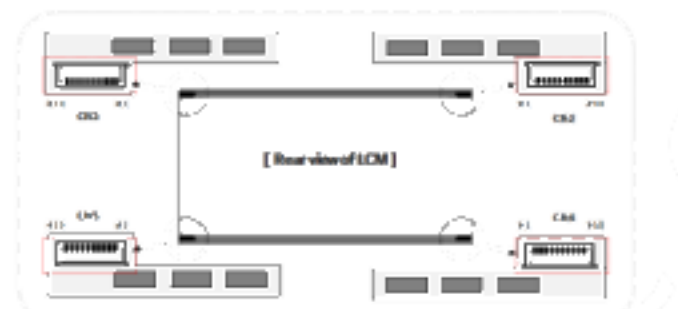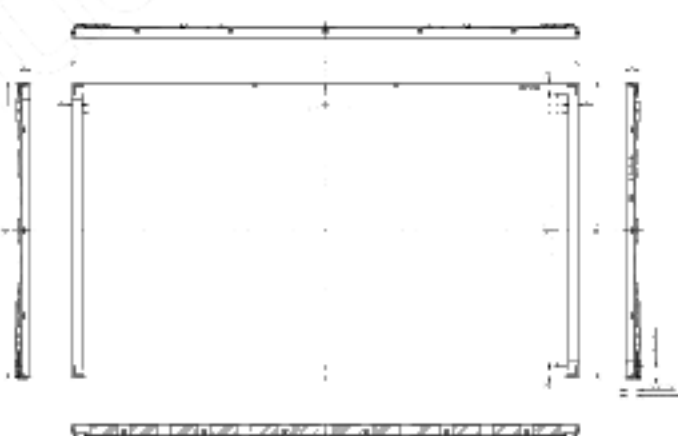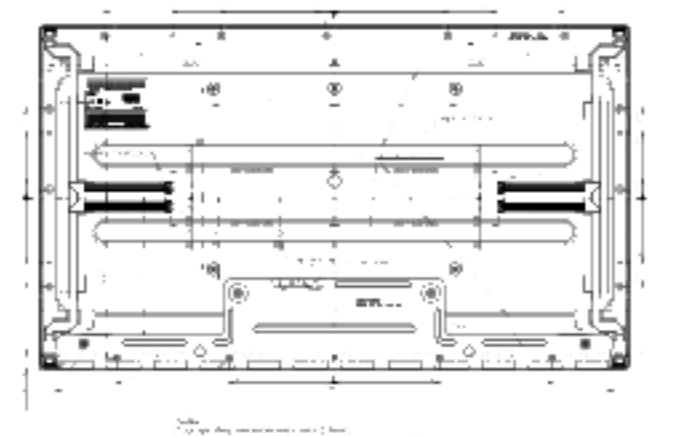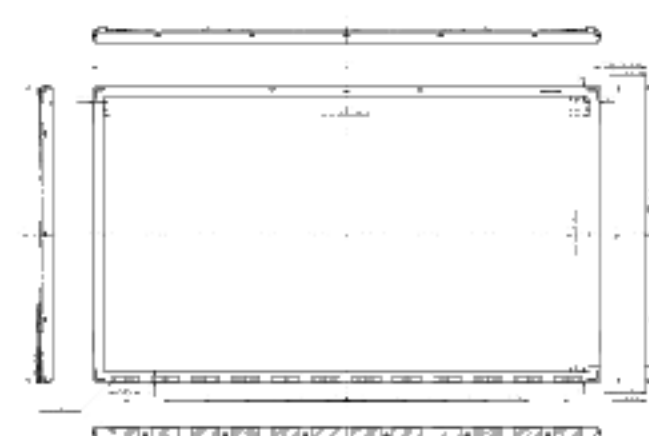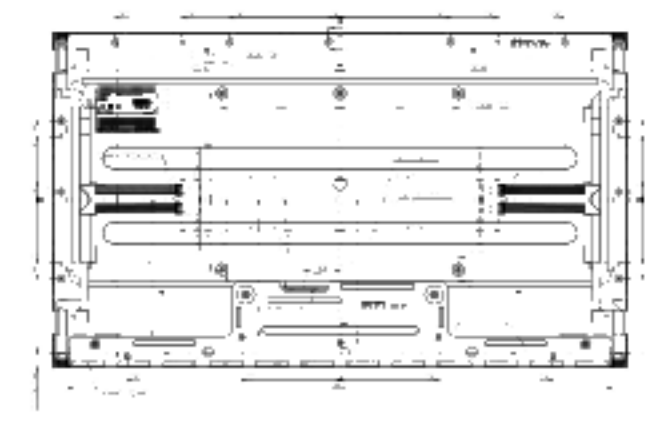Revision No.	Revision Date	Page	Before	After	Application Date																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
0.1	Sep.18.2018	-	First Draft, Preliminary Specifications	-	-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
0.2	Oct.31.2018	11	CN1 image change (PAD TOP) 	CN1 image change (PAD BOTTOM) 																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
		14	Connector pin area, CN ref change <table> <tr> <th>Pin</th><th>Symbol</th><th>Pin Description (DIN, DMS)</th><th>Remark</th><th>Pin</th><th>Symbol</th><th>Pin Description (DIN, DMS)</th><th>Remark</th></tr> <tr><td>A1</td><td>TP1</td><td>Channel1 Current Feedback</td><td></td><td>A1</td><td>TP1</td><td>Channel1 Current Feedback</td><td></td></tr> <tr><td>A2</td><td>TP2</td><td>Channel2 Current Feedback</td><td></td><td>A2</td><td>TP2</td><td>Channel2 Current Feedback</td><td></td></tr> <tr><td>A3</td><td>TP3</td><td>Channel3 Current Feedback</td><td></td><td>A3</td><td>TP3</td><td>Channel3 Current Feedback</td><td></td></tr> <tr><td>A4</td><td>TP4</td><td>Channel4 Current Feedback</td><td></td><td>A4</td><td>TP4</td><td>Channel4 Current Feedback</td><td></td></tr> <tr><td>A5</td><td>TP5</td><td>Channel5 Current Feedback</td><td></td><td>A5</td><td>TP5</td><td>Channel5 Current Feedback</td><td></td></tr> <tr><td>A6</td><td>TP6</td><td>Channel6 Current Feedback</td><td></td><td>A6</td><td>TP6</td><td>Channel6 Current Feedback</td><td></td></tr> <tr><td>A7</td><td>TP7</td><td>Channel7 Current Feedback</td><td></td><td>A7</td><td>TP7</td><td>Channel7 Current Feedback</td><td></td></tr> <tr><td>A8</td><td>TP8</td><td>Channel8 Current Feedback</td><td></td><td>A8</td><td>TP8</td><td>Channel8 Current Feedback</td><td></td></tr> <tr><td>A9</td><td>TP9</td><td>Channel9 Current Feedback</td><td></td><td>A9</td><td>TP9</td><td>Channel9 Current Feedback</td><td></td></tr> <tr><td>A10</td><td>TP10</td><td>Channel10 Current Feedback</td><td></td><td>A10</td><td>TP10</td><td>Channel10 Current Feedback</td><td></td></tr> <tr><td>A11</td><td>TP11</td><td>Channel11 Current Feedback</td><td></td><td>A11</td><td>TP11</td><td>Channel11 Current Feedback</td><td></td></tr> <tr><td>A12</td><td>TP12</td><td>Channel12 Current Feedback</td><td></td><td>A12</td><td>TP12</td><td>Channel12 Current Feedback</td><td></td></tr> <tr><td>A13</td><td>TP13</td><td>Channel13 Current Feedback</td><td></td><td>A13</td><td>TP13</td><td>Channel13 Current Feedback</td><td></td></tr> <tr><td>A14</td><td>TP14</td><td>Channel14 Current Feedback</td><td></td><td>A14</td><td>TP14</td><td>Channel14 Current Feedback</td><td></td></tr> <tr><td>A15</td><td>TP15</td><td>Channel15 Current Feedback</td><td></td><td>A15</td><td>TP15</td><td>Channel15 Current Feedback</td><td></td></tr> <tr><td>A16</td><td>TP16</td><td>Channel16 Current Feedback</td><td></td><td>A16</td><td>TP16</td><td>Channel16 Current Feedback</td><td></td></tr> <tr><td>A17</td><td>TP17</td><td>Channel17 Current Feedback</td><td></td><td>A17</td><td>TP17</td><td>Channel17 Current Feedback</td><td></td></tr> <tr><td>A18</td><td>TP18</td><td>Channel18 Current Feedback</td><td></td><td>A18</td><td>TP18</td><td>Channel18 Current Feedback</td><td></td></tr> <tr><td>A19</td><td>TP19</td><td>Channel19 Current Feedback</td><td></td><td>A19</td><td>TP19</td><td>Channel19 Current Feedback</td><td></td></tr> <tr><td>A20</td><td>TP20</td><td>Channel20 Current Feedback</td><td></td><td>A20</td><td>TP20</td><td>Channel20 Current Feedback</td><td></td></tr> <tr><td>A21</td><td>TP21</td><td>Channel21 Current Feedback</td><td></td><td>A21</td><td>TP21</td><td>Channel21 Current Feedback</td><td></td></tr> <tr><td>A22</td><td>TP22</td><td>Channel22 Current Feedback</td><td></td><td>A22</td><td>TP22</td><td>Channel22 Current Feedback</td><td></td></tr> <tr><td>A23</td><td>TP23</td><td>Channel23 Current Feedback</td><td></td><td>A23</td><td>TP23</td><td>Channel23 Current Feedback</td><td></td></tr> <tr><td>A24</td><td>TP24</td><td>Channel24 Current Feedback</td><td></td><td>A24</td><td>TP24</td><td>Channel24 Current Feedback</td><td></td></tr> <tr><td>A25</td><td>TP25</td><td>Channel25 Current Feedback</td><td></td><td>A25</td><td>TP25</td><td>Channel25 Current Feedback</td><td></td></tr> <tr><td>A26</td><td>TP26</td><td>Channel26 Current Feedback</td><td></td><td>A26</td><td>TP26</td><td>Channel26 Current Feedback</td><td></td></tr> <tr><td>A27</td><td>TP27</td><td>Channel27 Current Feedback</td><td></td><td>A27</td><td>TP27</td><td>Channel27 Current Feedback</td><td></td></tr> <tr><td>A28</td><td>TP28</td><td>Channel28 Current Feedback</td><td></td><td>A28</td><td>TP28</td><td>Channel28 Current Feedback</td><td></td></tr> <tr><td>A29</td><td>TP29</td><td>Channel29 Current Feedback</td><td></td><td>A29</td><td>TP29</td><td>Channel29 Current Feedback</td><td></td></tr> <tr><td>A30</td><td>TP30</td><td>Channel30 Current Feedback</td><td></td><td>A30</td><td>TP30</td><td>Channel30 Current Feedback</td><td></td></tr> <tr><td>A31</td><td>TP31</td><td>Channel31 Current Feedback</td><td></td><td>A31</td><td>TP31</td><td>Channel31 Current Feedback</td><td></td></tr> <tr><td>A32</td><td>TP32</td><td>Channel32 Current Feedback</td><td></td><td>A32</td><td>TP32</td><td>Channel32 Current Feedback</td><td></td></tr> <tr><td>A33</td><td>TP33</td><td>Channel33 Current Feedback</td><td></td><td>A33</td><td>TP33</td><td>Channel33 Current Feedback</td><td></td></tr> <tr><td>A34</td><td>TP34</td><td>Channel34 Current Feedback</td><td></td><td>A34</td><td>TP34</td><td>Channel34 Current Feedback</td><td></td></tr> <tr><td>A35</td><td>TP35</td><td>Channel35 Current Feedback</td><td></td><td>A35</td><td>TP35</td><td>Channel35 Current Feedback</td><td></td></tr> <tr><td>A36</td><td>TP36</td><td>Channel36 Current Feedback</td><td></td><td>A36</td><td>TP36</td><td>Channel36 Current Feedback</td><td></td></tr> <tr><td>A37</td><td>TP37</td><td>Channel37 Current Feedback</td><td></td><td>A37</td><td>TP37</td><td>Channel37 Current Feedback</td><td></td></tr> <tr><td>A38</td><td>TP38</td><td>Channel38 Current Feedback</td><td></td><td>A38</td><td>TP38</td><td>Channel38 Current Feedback</td><td></td></tr> <tr><td>A39</td><td>TP39</td><td>Channel39 Current Feedback</td><td></td><td>A39</td><td>TP39</td><td>Channel39 Current Feedback</td><td></td></tr> <tr><td>A40</td><td>TP40</td><td>Channel40 Current Feedback</td><td></td><td>A40</td><td>TP40</td><td>Channel40 Current Feedback</td><td></td></tr> <tr><td>A41</td><td>TP41</td><td>Channel41 Current Feedback</td><td></td><td>A41</td><td>TP41</td><td>Channel41 Current Feedback</td><td></td></tr> <tr><td>A42</td><td>TP42</td><td>Channel42 Current Feedback</td><td></td><td>A42</td><td>TP42</td><td>Channel42 Current Feedback</td><td></td></tr> <tr><td>A43</td><td>TP43</td><td>Channel43 Current Feedback</td><td></td><td>A43</td><td>TP43</td><td>Channel43 Current Feedback</td><td></td></tr> <tr><td>A44</td><td>TP44</td><td>Channel44 Current Feedback</td><td></td><td>A44</td><td>TP44</td><td>Channel44 Current Feedback</td><td></td></tr> <tr><td>A45</td><td>TP45</td><td>Channel45 Current Feedback</td><td></td><td>A45</td><td>TP45</td><td>Channel45 Current Feedback</td><td></td></tr> <tr><td>A46</td><td>TP46</td><td>Channel46 Current Feedback</td><td></td><td>A46</td><td>TP46</td><td>Channel46 Current Feedback</td><td></td></tr> <tr><td>A47</td><td>TP47</td><td>Channel47 Current Feedback</td><td></td><td>A47</td><td>TP47</td><td>Channel47 Current Feedback</td><td></td></tr> <tr><td>A48</td><td>TP48</td><td>Channel48 Current Feedback</td><td></td><td>A48</td><td>TP48</td><td>Channel48 Current Feedback</td><td></td></tr> <tr><td>A49</td><td>TP49</td><td>Channel49 Current Feedback</td><td></td><td>A49</td><td>TP49</td><td>Channel49 Current Feedback</td><td></td></tr> <tr><td>A50</td><td>TP50</td><td>Channel50 Current Feedback</td><td></td><td>A50</td><td>TP50</td><td>Channel50 Current Feedback</td><td></td></tr> <tr><td>A51</td><td>TP51</td><td>Channel51 Current Feedback</td><td></td><td>A51</td><td>TP51</td><td>Channel51 Current Feedback</td><td></td></tr> <tr><td>A52</td><td>TP52</td><td>Channel52 Current Feedback</td><td></td><td>A52</td><td>TP52</td><td>Channel52 Current Feedback</td><td></td></tr> <tr><td>A53</td><td>TP53</td><td>Channel53 Current Feedback</td><td></td><td>A53</td><td>TP53</td><td>Channel53 Current Feedback</td><td></td></tr> <tr><td>A54</td><td>TP54</td><td>Channel54 Current Feedback</td><td></td><td>A54</td><td>TP54</td><td>Channel54 Current Feedback</td><td></td></tr> <tr><td>A55</td><td>TP55</td><td>Channel55 Current Feedback</td><td></td><td>A55</td><td>TP55</td><td>Channel55 Current Feedback</td><td></td></tr> <tr><td>A56</td><td>TP56</td><td>Channel56 Current Feedback</td><td></td><td>A56</td><td>TP56</td><td>Channel56 Current Feedback</td><td></td></tr> <tr><td>A57</td><td>TP57</td><td>Channel57 Current Feedback</td><td></td><td>A57</td><td>TP57</td><td>Channel57 Current Feedback</td><td></td></tr> <tr><td>A58</td><td>TP58</td><td>Channel58 Current Feedback</td><td></td><td>A58</td><td>TP58</td><td>Channel58 Current Feedback</td><td></td></tr> <tr><td>A59</td><td>TP59</td><td>Channel59 Current Feedback</td><td></td><td>A59</td><td>TP59</td><td>Channel59 Current Feedback</td><td></td></tr> <tr><td>A60</td><td>TP60</td><td>Channel60 Current Feedback</td><td></td><td>A60</td><td>TP60</td><td>Channel60 Current Feedback</td><td></td></tr> <tr><td>A61</td><td>TP61</td><td>Channel61 Current Feedback</td><td></td><td>A61</td><td>TP61</td><td>Channel61 Current Feedback</td><td></td></tr> <tr><td>A62</td><td>TP62</td><td>Channel62 Current Feedback</td><td></td><td>A62</td><td>TP62</td><td>Channel62 Current Feedback</td><td></td></tr> <tr><td>A63</td><td>TP63</td><td>Channel63 Current Feedback</td><td></td><td>A63</td><td>TP63</td><td>Channel63 Current Feedback</td><td></td></tr> <tr><td>A64</td><td>TP64</td><td>Channel64 Current Feedback</td><td></td><td>A64</td><td>TP64</td><td>Channel64 Current Feedback</td><td></td></tr> <tr><td>A65</td><td>TP65</td><td>Channel65 Current Feedback</td><td></td><td>A65</td><td>TP65</td><td>Channel65 Current Feedback</td><td></td></tr> <tr><td>A66</td><td>TP66</td><td>Channel66 Current Feedback</td><td></td><td>A66</td><td>TP66</td><td>Channel66 Current Feedback</td><td></td></tr> <tr><td>A67</td><td>TP67</td><td>Channel67 Current Feedback</td><td></td><td>A67</td><td>TP67</td><td>Channel67 Current Feedback</td><td></td></tr> <tr><td>A68</td><td>TP68</td><td>Channel68 Current Feedback</td><td></td><td>A68</td><td>TP68</td><td>Channel68 Current Feedback</td><td></td></tr> <tr><td>A69</td><td>TP69</td><td>Channel69 Current Feedback</td><td></td><td>A69</td><td>TP69</td><td>Channel69 Current Feedback</td><td></td></tr> <tr><td>A70</td><td>TP70</td><td>Channel70 Current Feedback</td><td></td><td>A70</td><td>TP70</td><td>Channel70 Current Feedback</td><td></td></tr> <tr><td>A71</td><td>TP71</td><td>Channel71 Current Feedback</td><td></td><td>A71</td><td>TP71</td><td>Channel71 Current Feedback</td><td></td></tr> <tr><td>A72</td><td>TP72</td><td>Channel72 Current Feedback</td><td></td><td>A72</td><td>TP72</td><td>Channel72 Current Feedback</td><td></td></tr> <tr><td>A73</td><td>TP73</td><td>Channel73 Current Feedback</td><td></td><td>A73</td><td>TP73</td><td>Channel73 Current Feedback</td><td></td></tr> <tr><td>A74</td><td>TP74</td><td>Channel74 Current Feedback</td><td></td><td>A74</td><td>TP74</td><td>Channel74 Current Feedback</td><td></td></tr> <tr><td>A75</td><td>TP75</td><td>Channel75 Current Feedback</td><td></td><td>A75</td><td>TP75</td><td>Channel75 Current Feedback</td><td></td></tr> <tr><td>A76</td><td>TP76</td><td>Channel76 Current Feedback</td><td></td><td>A76</td><td>TP76</td><td>Channel76 Current Feedback</td><td></td></tr> <tr><td>A77</td><td>TP77</td><td>Channel77 Current Feedback</td><td></td><td>A77</td><td>TP77</td><td>Channel77 Current Feedback</td><td></td></tr> <tr><td>A78</td><td>TP78</td><td>Channel78 Current Feedback</td><td></td><td>A78</td><td>TP78</td><td>Channel78 Current Feedback</td><td></td></tr> <tr><td>A79</td><td>TP79</td><td>Channel79 Current Feedback</td><td></td><td>A79</td><td>TP79</td><td>Channel79 Current Feedback</td><td></td></tr> <tr><td>A80</td><td>TP80</td><td>Channel80 Current Feedback</td><td></td><td>A80</td><td>TP80</td><td>Channel80 Current Feedback</td><td></td></tr> <tr><td>A81</td><td>TP81</td><td>Channel81 Current Feedback</td><td></td><td>A81</td><td>TP81</td><td>Channel81 Current Feedback</td><td></td></tr> <tr><td>A82</td><td>TP82</td><td>Channel82 Current Feedback</td><td></td><td>A82</td><td>TP82</td><td>Channel82 Current Feedback</td><td></td></tr> <tr><td>A83</td><td>TP83</td><td>Channel83 Current Feedback</td><td></td><td>A83</td><td>TP83</td><td>Channel83 Current Feedback</td><td></td></tr> <tr><td>A84</td><td>TP84</td><td>Channel84 Current Feedback</td><td></td><td>A84</td><td>TP84</td><td>Channel84 Current Feedback</td><td></td></tr> <tr><td>A85</td><td>TP85</td><td>Channel85 Current Feedback</td><td></td><td>A85</td><td>TP85</td><td>Channel85 Current Feedback</td><td></td></tr> <tr><td>A86</td><td>TP86</td><td>Channel86 Current Feedback</td><td></td><td>A86</td><td>TP86</td><td>Channel86 Current Feedback</td><td></td></tr> <tr><td>A87</td><td>TP87</td><td>Channel87 Current Feedback</td><td></td><td>A87</td><td>TP87</td><td>Channel87 Current Feedback</td><td></td></tr> <tr><td>A88</td><td>TP88</td><td>Channel88 Current Feedback</td><td></td><td>A88</td><td>TP88</td><td>Channel88 Current Feedback</td><td></td></tr> <tr><td>A89</td><td>TP89</td><td>Channel89 Current Feedback</td><td></td><td>A89</td><td>TP89</td><td>Channel89 Current Feedback</td><td></td></tr> <tr><td>A90</td><td>TP90</td><td>Channel90 Current Feedback</td><td></td><td>A90</td><td>TP90</td><td>Channel90 Current Feedback</td><td></td></tr> <tr><td>A91</td><td>TP91</td><td>Channel91 Current Feedback</td><td></td><td>A91</td><td>TP91</td><td>Channel91 Current Feedback</td><td></td></tr> <tr><td>A92</td><td>TP92</td><td>Channel92 Current Feedback</td><td></td><td>A92</td><td>TP92</td><td>Channel92 Current Feedback</td><td></td></tr> <tr><td>A93</td><td>TP93</td><td>Channel93 Current Feedback</td><td></td><td>A93</td><td>TP93</td><td>Channel93 Current Feedback</td><td></td></tr> <tr><td>A94</td><td>TP94</td><td>Channel94 Current Feedback</td><td></td><td>A94</td><td>TP94</td><td>Channel94 Current Feedback</td><td></td></tr> <tr><td>A95</td><td>TP95</td><td>Channel95 Current Feedback</td><td></td><td>A95</td><td>TP95</td><td>Channel95 Current Feedback</td><td></td></tr> <tr><td>A96</td><td>TP96</td><td>Channel96 Current Feedback</td><td></td><td>A96</td><td>TP96</td><td>Channel96 Current Feedback</td><td></td></tr> <tr><td>A97</td><td>TP97</td><td>Channel97 Current Feedback</td><td></td><td>A97</td><td>TP97</td><td>Channel97 Current Feedback</td><td></td></tr> <tr><td>A98</td><td>TP98</td><td>Channel98 Current Feedback</td><td></td><td>A98</td><td>TP98</td><td>Channel98 Current Feedback</td><td></td></tr> <tr><td>A99</td><td>TP99</td><td>Channel99 Current Feedback</td><td></td><td>A99</td><td>TP99</td><td>Channel99 Current Feedback</td><td></td></tr> <tr><td>A100</td><td>TP100</td><td>Channel100 Current Feedback</td><td></td><td>A100</td><td>TP100</td><td>Channel100 Current Feedback</td><td></td></tr> </table> [Rear view of LCM]  Outline Dimension (D) : 21.0mm Weight : TBD Total (79.3)Watt ((10.5) Watt @V_{LCD}, (68.8)Watt @Is=(80)mA)   Notes: 1. All dimensions are in mm unless otherwise specified. 2. Tolerances are as follows: 0.1mm for all dimensions unless otherwise specified. 3. All dimensions are to be maintained unless otherwise specified. 4. All dimensions are to be maintained unless otherwise specified. 5. All dimensions are to be maintained unless otherwise specified. 6. All dimensions are to be maintained unless otherwise specified. 7. All dimensions are to be maintained unless otherwise specified. 8. All dimensions are to be maintained unless otherwise specified. 9. All dimensions are to be maintained unless otherwise specified. 10. All dimensions are to be maintained unless otherwise specified. 25 26 Outline Dimension (D) : 23.0mm Weight : 6,000g (TBD) Total (79.3)Watt ((10.5) Watt @V_{LCD}, (71.4)Watt @Is=(85)mA)   Notes: 1. All dimensions are in mm unless otherwise specified. 2. Tolerances are as follows: 0.1mm for all dimensions unless otherwise specified. 3. All dimensions are to be maintained unless otherwise specified. 4. All dimensions are to be maintained unless otherwise specified. 5. All dimensions are to be maintained unless otherwise specified. 6. All dimensions are to be maintained unless otherwise specified. 7. All dimensions are to be maintained unless otherwise specified. 8. All dimensions are to be maintained unless otherwise specified. 9. All dimensions are to be maintained unless otherwise specified. 10. All dimensions are to be maintained unless otherwise specified.	Pin	Symbol	Pin Description (DIN, DMS)	Remark	Pin	Symbol	Pin Description (DIN, DMS)	Remark	A1	TP1	Channel1 Current Feedback		A1	TP1	Channel1 Current Feedback		A2	TP2	Channel2 Current Feedback		A2	TP2	Channel2 Current Feedback		A3	TP3	Channel3 Current Feedback		A3	TP3	Channel3 Current Feedback		A4	TP4	Channel4 Current Feedback		A4	TP4	Channel4 Current Feedback		A5	TP5	Channel5 Current Feedback		A5	TP5	Channel5 Current Feedback		A6	TP6	Channel6 Current Feedback		A6	TP6	Channel6 Current Feedback		A7	TP7	Channel7 Current Feedback		A7	TP7	Channel7 Current Feedback		A8	TP8	Channel8 Current Feedback		A8	TP8	Channel8 Current Feedback		A9	TP9	Channel9 Current Feedback		A9	TP9	Channel9 Current Feedback		A10	TP10	Channel10 Current Feedback		A10	TP10	Channel10 Current Feedback		A11	TP11	Channel11 Current Feedback		A11	TP11	Channel11 Current Feedback		A12	TP12	Channel12 Current Feedback		A12	TP12	Channel12 Current Feedback		A13	TP13	Channel13 Current Feedback		A13	TP13	Channel13 Current Feedback		A14	TP14	Channel14 Current Feedback		A14	TP14	Channel14 Current Feedback		A15	TP15	Channel15 Current Feedback		A15	TP15	Channel15 Current Feedback		A16	TP16	Channel16 Current Feedback		A16	TP16	Channel16 Current Feedback		A17	TP17	Channel17 Current Feedback		A17	TP17	Channel17 Current Feedback		A18	TP18	Channel18 Current Feedback		A18	TP18	Channel18 Current Feedback		A19	TP19	Channel19 Current Feedback		A19	TP19	Channel19 Current Feedback		A20	TP20	Channel20 Current Feedback		A20	TP20	Channel20 Current Feedback		A21	TP21	Channel21 Current Feedback		A21	TP21	Channel21 Current Feedback		A22	TP22	Channel22 Current Feedback		A22	TP22	Channel22 Current Feedback		A23	TP23	Channel23 Current Feedback		A23	TP23	Channel23 Current Feedback		A24	TP24	Channel24 Current Feedback		A24	TP24	Channel24 Current Feedback		A25	TP25	Channel25 Current Feedback		A25	TP25	Channel25 Current Feedback		A26	TP26	Channel26 Current Feedback		A26	TP26	Channel26 Current Feedback		A27	TP27	Channel27 Current Feedback		A27	TP27	Channel27 Current Feedback		A28	TP28	Channel28 Current Feedback		A28	TP28	Channel28 Current Feedback		A29	TP29	Channel29 Current Feedback		A29	TP29	Channel29 Current Feedback		A30	TP30	Channel30 Current Feedback		A30	TP30	Channel30 Current Feedback		A31	TP31	Channel31 Current Feedback		A31	TP31	Channel31 Current Feedback		A32	TP32	Channel32 Current Feedback		A32	TP32	Channel32 Current Feedback		A33	TP33	Channel33 Current Feedback		A33	TP33	Channel33 Current Feedback		A34	TP34	Channel34 Current Feedback		A34	TP34	Channel34 Current Feedback		A35	TP35	Channel35 Current Feedback		A35	TP35	Channel35 Current Feedback		A36	TP36	Channel36 Current Feedback		A36	TP36	Channel36 Current Feedback		A37	TP37	Channel37 Current Feedback		A37	TP37	Channel37 Current Feedback		A38	TP38	Channel38 Current Feedback		A38	TP38	Channel38 Current Feedback		A39	TP39	Channel39 Current Feedback		A39	TP39	Channel39 Current Feedback		A40	TP40	Channel40 Current Feedback		A40	TP40	Channel40 Current Feedback		A41	TP41	Channel41 Current Feedback		A41	TP41	Channel41 Current Feedback		A42	TP42	Channel42 Current Feedback		A42	TP42	Channel42 Current Feedback		A43	TP43	Channel43 Current Feedback		A43	TP43	Channel43 Current Feedback		A44	TP44	Channel44 Current Feedback		A44	TP44	Channel44 Current Feedback		A45	TP45	Channel45 Current Feedback		A45	TP45	Channel45 Current Feedback		A46	TP46	Channel46 Current Feedback		A46	TP46	Channel46 Current Feedback		A47	TP47	Channel47 Current Feedback		A47	TP47	Channel47 Current Feedback		A48	TP48	Channel48 Current Feedback		A48	TP48	Channel48 Current Feedback		A49	TP49	Channel49 Current Feedback		A49	TP49	Channel49 Current Feedback		A50	TP50	Channel50 Current Feedback		A50	TP50	Channel50 Current Feedback		A51	TP51	Channel51 Current Feedback		A51	TP51	Channel51 Current Feedback		A52	TP52	Channel52 Current Feedback		A52	TP52	Channel52 Current Feedback		A53	TP53	Channel53 Current Feedback		A53	TP53	Channel53 Current Feedback		A54	TP54	Channel54 Current Feedback		A54	TP54	Channel54 Current Feedback		A55	TP55	Channel55 Current Feedback		A55	TP55	Channel55 Current Feedback		A56	TP56	Channel56 Current Feedback		A56	TP56	Channel56 Current Feedback		A57	TP57	Channel57 Current Feedback		A57	TP57	Channel57 Current Feedback		A58	TP58	Channel58 Current Feedback		A58	TP58	Channel58 Current Feedback		A59	TP59	Channel59 Current Feedback		A59	TP59	Channel59 Current Feedback		A60	TP60	Channel60 Current Feedback		A60	TP60	Channel60 Current Feedback		A61	TP61	Channel61 Current Feedback		A61	TP61	Channel61 Current Feedback		A62	TP62	Channel62 Current Feedback		A62	TP62	Channel62 Current Feedback		A63	TP63	Channel63 Current Feedback		A63	TP63	Channel63 Current Feedback		A64	TP64	Channel64 Current Feedback		A64	TP64	Channel64 Current Feedback		A65	TP65	Channel65 Current Feedback		A65	TP65	Channel65 Current Feedback		A66	TP66	Channel66 Current Feedback		A66	TP66	Channel66 Current Feedback		A67	TP67	Channel67 Current Feedback		A67	TP67	Channel67 Current Feedback		A68	TP68	Channel68 Current Feedback		A68	TP68	Channel68 Current Feedback		A69	TP69	Channel69 Current Feedback		A69	TP69	Channel69 Current Feedback		A70	TP70	Channel70 Current Feedback		A70	TP70	Channel70 Current Feedback		A71	TP71	Channel71 Current Feedback		A71	TP71	Channel71 Current Feedback		A72	TP72	Channel72 Current Feedback		A72	TP72	Channel72 Current Feedback		A73	TP73	Channel73 Current Feedback		A73	TP73	Channel73 Current Feedback		A74	TP74	Channel74 Current Feedback		A74	TP74	Channel74 Current Feedback		A75	TP75	Channel75 Current Feedback		A75	TP75	Channel75 Current Feedback		A76	TP76	Channel76 Current Feedback		A76	TP76	Channel76 Current Feedback		A77	TP77	Channel77 Current Feedback		A77	TP77	Channel77 Current Feedback		A78	TP78	Channel78 Current Feedback		A78	TP78	Channel78 Current Feedback		A79	TP79	Channel79 Current Feedback		A79	TP79	Channel79 Current Feedback		A80	TP80	Channel80 Current Feedback		A80	TP80	Channel80 Current Feedback		A81	TP81	Channel81 Current Feedback		A81	TP81	Channel81 Current Feedback		A82	TP82	Channel82 Current Feedback		A82	TP82	Channel82 Current Feedback		A83	TP83	Channel83 Current Feedback		A83	TP83	Channel83 Current Feedback		A84	TP84	Channel84 Current Feedback		A84	TP84	Channel84 Current Feedback		A85	TP85	Channel85 Current Feedback		A85	TP85	Channel85 Current Feedback		A86	TP86	Channel86 Current Feedback		A86	TP86	Channel86 Current Feedback		A87	TP87	Channel87 Current Feedback		A87	TP87	Channel87 Current Feedback		A88	TP88	Channel88 Current Feedback		A88	TP88	Channel88 Current Feedback		A89	TP89	Channel89 Current Feedback		A89	TP89	Channel89 Current Feedback		A90	TP90	Channel90 Current Feedback		A90	TP90	Channel90 Current Feedback		A91	TP91	Channel91 Current Feedback		A91	TP91	Channel91 Current Feedback		A92	TP92	Channel92 Current Feedback		A92	TP92	Channel92 Current Feedback		A93	TP93	Channel93 Current Feedback		A93	TP93	Channel93 Current Feedback		A94	TP94	Channel94 Current Feedback		A94	TP94	Channel94 Current Feedback		A95	TP95	Channel95 Current Feedback		A95	TP95	Channel95 Current Feedback		A96	TP96	Channel96 Current Feedback		A96	TP96	Channel96 Current Feedback		A97	TP97	Channel97 Current Feedback		A97	TP97	Channel97 Current Feedback		A98	TP98	Channel98 Current Feedback		A98	TP98	Channel98 Current Feedback		A99	TP99	Channel99 Current Feedback		A99	TP99	Channel99 Current Feedback		A100	TP100	Channel100 Current Feedback		A100	TP100	Channel100 Current Feedback	
Pin	Symbol	Pin Description (DIN, DMS)	Remark	Pin	Symbol	Pin Description (DIN, DMS)	Remark																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
A1	TP1	Channel1 Current Feedback		A1	TP1	Channel1 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A2	TP2	Channel2 Current Feedback		A2	TP2	Channel2 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A3	TP3	Channel3 Current Feedback		A3	TP3	Channel3 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A4	TP4	Channel4 Current Feedback		A4	TP4	Channel4 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A5	TP5	Channel5 Current Feedback		A5	TP5	Channel5 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A6	TP6	Channel6 Current Feedback		A6	TP6	Channel6 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A7	TP7	Channel7 Current Feedback		A7	TP7	Channel7 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A8	TP8	Channel8 Current Feedback		A8	TP8	Channel8 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A9	TP9	Channel9 Current Feedback		A9	TP9	Channel9 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A10	TP10	Channel10 Current Feedback		A10	TP10	Channel10 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A11	TP11	Channel11 Current Feedback		A11	TP11	Channel11 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A12	TP12	Channel12 Current Feedback		A12	TP12	Channel12 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A13	TP13	Channel13 Current Feedback		A13	TP13	Channel13 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A14	TP14	Channel14 Current Feedback		A14	TP14	Channel14 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A15	TP15	Channel15 Current Feedback		A15	TP15	Channel15 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A16	TP16	Channel16 Current Feedback		A16	TP16	Channel16 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A17	TP17	Channel17 Current Feedback		A17	TP17	Channel17 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A18	TP18	Channel18 Current Feedback		A18	TP18	Channel18 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A19	TP19	Channel19 Current Feedback		A19	TP19	Channel19 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A20	TP20	Channel20 Current Feedback		A20	TP20	Channel20 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A21	TP21	Channel21 Current Feedback		A21	TP21	Channel21 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A22	TP22	Channel22 Current Feedback		A22	TP22	Channel22 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A23	TP23	Channel23 Current Feedback		A23	TP23	Channel23 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A24	TP24	Channel24 Current Feedback		A24	TP24	Channel24 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A25	TP25	Channel25 Current Feedback		A25	TP25	Channel25 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A26	TP26	Channel26 Current Feedback		A26	TP26	Channel26 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A27	TP27	Channel27 Current Feedback		A27	TP27	Channel27 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A28	TP28	Channel28 Current Feedback		A28	TP28	Channel28 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A29	TP29	Channel29 Current Feedback		A29	TP29	Channel29 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A30	TP30	Channel30 Current Feedback		A30	TP30	Channel30 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A31	TP31	Channel31 Current Feedback		A31	TP31	Channel31 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A32	TP32	Channel32 Current Feedback		A32	TP32	Channel32 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A33	TP33	Channel33 Current Feedback		A33	TP33	Channel33 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A34	TP34	Channel34 Current Feedback		A34	TP34	Channel34 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A35	TP35	Channel35 Current Feedback		A35	TP35	Channel35 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A36	TP36	Channel36 Current Feedback		A36	TP36	Channel36 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A37	TP37	Channel37 Current Feedback		A37	TP37	Channel37 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A38	TP38	Channel38 Current Feedback		A38	TP38	Channel38 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A39	TP39	Channel39 Current Feedback		A39	TP39	Channel39 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A40	TP40	Channel40 Current Feedback		A40	TP40	Channel40 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A41	TP41	Channel41 Current Feedback		A41	TP41	Channel41 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A42	TP42	Channel42 Current Feedback		A42	TP42	Channel42 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A43	TP43	Channel43 Current Feedback		A43	TP43	Channel43 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A44	TP44	Channel44 Current Feedback		A44	TP44	Channel44 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A45	TP45	Channel45 Current Feedback		A45	TP45	Channel45 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A46	TP46	Channel46 Current Feedback		A46	TP46	Channel46 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A47	TP47	Channel47 Current Feedback		A47	TP47	Channel47 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A48	TP48	Channel48 Current Feedback		A48	TP48	Channel48 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A49	TP49	Channel49 Current Feedback		A49	TP49	Channel49 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A50	TP50	Channel50 Current Feedback		A50	TP50	Channel50 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A51	TP51	Channel51 Current Feedback		A51	TP51	Channel51 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A52	TP52	Channel52 Current Feedback		A52	TP52	Channel52 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A53	TP53	Channel53 Current Feedback		A53	TP53	Channel53 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A54	TP54	Channel54 Current Feedback		A54	TP54	Channel54 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A55	TP55	Channel55 Current Feedback		A55	TP55	Channel55 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A56	TP56	Channel56 Current Feedback		A56	TP56	Channel56 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A57	TP57	Channel57 Current Feedback		A57	TP57	Channel57 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A58	TP58	Channel58 Current Feedback		A58	TP58	Channel58 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A59	TP59	Channel59 Current Feedback		A59	TP59	Channel59 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A60	TP60	Channel60 Current Feedback		A60	TP60	Channel60 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A61	TP61	Channel61 Current Feedback		A61	TP61	Channel61 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A62	TP62	Channel62 Current Feedback		A62	TP62	Channel62 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A63	TP63	Channel63 Current Feedback		A63	TP63	Channel63 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A64	TP64	Channel64 Current Feedback		A64	TP64	Channel64 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A65	TP65	Channel65 Current Feedback		A65	TP65	Channel65 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A66	TP66	Channel66 Current Feedback		A66	TP66	Channel66 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A67	TP67	Channel67 Current Feedback		A67	TP67	Channel67 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A68	TP68	Channel68 Current Feedback		A68	TP68	Channel68 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A69	TP69	Channel69 Current Feedback		A69	TP69	Channel69 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A70	TP70	Channel70 Current Feedback		A70	TP70	Channel70 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A71	TP71	Channel71 Current Feedback		A71	TP71	Channel71 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A72	TP72	Channel72 Current Feedback		A72	TP72	Channel72 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A73	TP73	Channel73 Current Feedback		A73	TP73	Channel73 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A74	TP74	Channel74 Current Feedback		A74	TP74	Channel74 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A75	TP75	Channel75 Current Feedback		A75	TP75	Channel75 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A76	TP76	Channel76 Current Feedback		A76	TP76	Channel76 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A77	TP77	Channel77 Current Feedback		A77	TP77	Channel77 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A78	TP78	Channel78 Current Feedback		A78	TP78	Channel78 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A79	TP79	Channel79 Current Feedback		A79	TP79	Channel79 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A80	TP80	Channel80 Current Feedback		A80	TP80	Channel80 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A81	TP81	Channel81 Current Feedback		A81	TP81	Channel81 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A82	TP82	Channel82 Current Feedback		A82	TP82	Channel82 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A83	TP83	Channel83 Current Feedback		A83	TP83	Channel83 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A84	TP84	Channel84 Current Feedback		A84	TP84	Channel84 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A85	TP85	Channel85 Current Feedback		A85	TP85	Channel85 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A86	TP86	Channel86 Current Feedback		A86	TP86	Channel86 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A87	TP87	Channel87 Current Feedback		A87	TP87	Channel87 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A88	TP88	Channel88 Current Feedback		A88	TP88	Channel88 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A89	TP89	Channel89 Current Feedback		A89	TP89	Channel89 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A90	TP90	Channel90 Current Feedback		A90	TP90	Channel90 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A91	TP91	Channel91 Current Feedback		A91	TP91	Channel91 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A92	TP92	Channel92 Current Feedback		A92	TP92	Channel92 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A93	TP93	Channel93 Current Feedback		A93	TP93	Channel93 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A94	TP94	Channel94 Current Feedback		A94	TP94	Channel94 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A95	TP95	Channel95 Current Feedback		A95	TP95	Channel95 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A96	TP96	Channel96 Current Feedback		A96	TP96	Channel96 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A97	TP97	Channel97 Current Feedback		A97	TP97	Channel97 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A98	TP98	Channel98 Current Feedback		A98	TP98	Channel98 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A99	TP99	Channel99 Current Feedback		A99	TP99	Channel99 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
A100	TP100	Channel100 Current Feedback		A100	TP100	Channel100 Current Feedback																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					

Product specification

Record of revisions

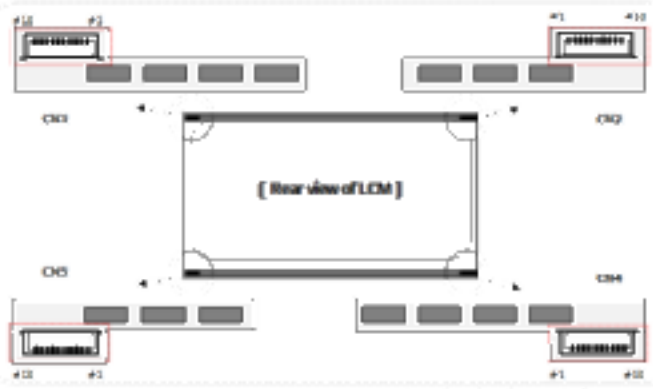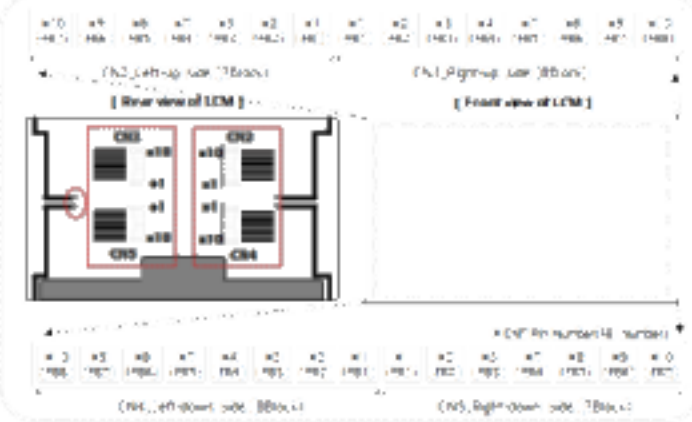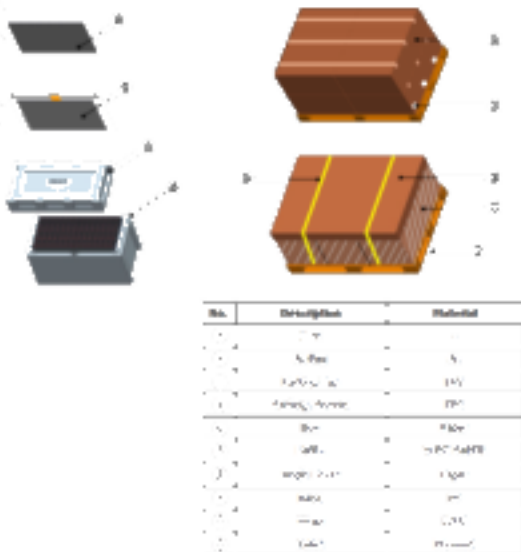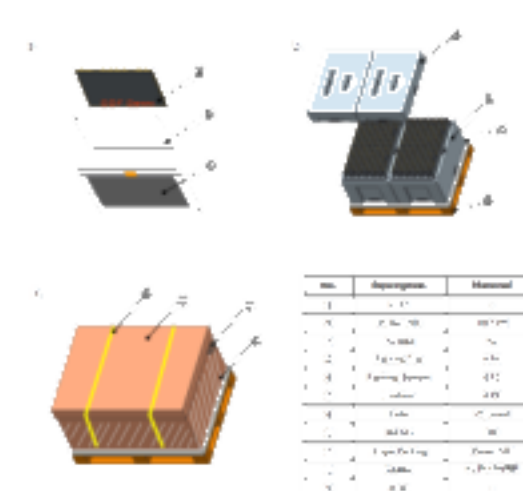Revision No.	Revision Date	Page	Before	After	Application Date																																																													
		10	LED electrical characteristics <table><thead><tr><th rowspan="2">Parameter</th><th rowspan="2">Symbol</th><th colspan="3">Values</th></tr><tr><th>Min.</th><th>Typ.</th><th>Max.</th></tr></thead><tbody><tr><td>LED string current</td><td>I_s</td><td>-</td><td>(80)</td><td>(85)</td></tr><tr><td>LED string voltage</td><td>V_s</td><td>(27.7)</td><td>(28.7)</td><td>(29.7)</td></tr><tr><td>Power consumption</td><td>P_{be}</td><td>-</td><td>(68.8)</td><td>(71.2)</td></tr><tr><td>LED life time</td><td>LED_LT</td><td>30,000</td><td>-</td><td>-</td></tr></tbody></table>	Parameter	Symbol	Values			Min.	Typ.	Max.	LED string current	I _s	-	(80)	(85)	LED string voltage	V _s	(27.7)	(28.7)	(29.7)	Power consumption	P _{be}	-	(68.8)	(71.2)	LED life time	LED_LT	30,000	-	-	<table><thead><tr><th rowspan="2">Parameter</th><th rowspan="2">Symbol</th><th colspan="3">Values</th><th rowspan="2">Units</th></tr><tr><th>Min.</th><th>Typ.</th><th>Max.</th></tr></thead><tbody><tr><td>LED string current</td><td>I_s</td><td>-</td><td>(85)</td><td>(90)</td><td>mA</td></tr><tr><td>LED string voltage</td><td>V_s</td><td>(27.0)</td><td>(28.0)</td><td>(29.0)</td><td>V</td></tr><tr><td>Power consumption</td><td>P_{be}</td><td>-</td><td>(71.4)</td><td>(74.0)</td><td>Watt</td></tr><tr><td>LED life time</td><td>LED_LT</td><td>30,000</td><td>-</td><td>-</td><td>Hour</td></tr></tbody></table>	Parameter	Symbol	Values			Units	Min.	Typ.	Max.	LED string current	I _s	-	(85)	(90)	mA	LED string voltage	V _s	(27.0)	(28.0)	(29.0)	V	Power consumption	P _{be}	-	(71.4)	(74.0)	Watt	LED life time	LED_LT	30,000	-	-	Hour	
Parameter	Symbol	Values																																																																
		Min.	Typ.	Max.																																																														
LED string current	I _s	-	(80)	(85)																																																														
LED string voltage	V _s	(27.7)	(28.7)	(29.7)																																																														
Power consumption	P _{be}	-	(68.8)	(71.2)																																																														
LED life time	LED_LT	30,000	-	-																																																														
Parameter	Symbol	Values			Units																																																													
		Min.	Typ.	Max.																																																														
LED string current	I _s	-	(85)	(90)	mA																																																													
LED string voltage	V _s	(27.0)	(28.0)	(29.0)	V																																																													
Power consumption	P _{be}	-	(71.4)	(74.0)	Watt																																																													
LED life time	LED_LT	30,000	-	-	Hour																																																													
		14	Backlight connector pin configuration(CN2 ~ CN5) Table 4. Backlight connector pin configuration(CN2 ~ CN5) The LED interface connector is a model 10035WS-H10G, Manufactured by Yeonho. The mating connector is a 10035HS-H10G or equivalent. The pin configuration for the connector is shown in the table below. 	The LED wire cable connector is a model 12507HS-H10G1, Manufactured by Yeonho. The mating connector is a 12507MR-H10G. The pin configuration for the connector is shown in the table below. 																																																														
		30	PACKING INFORMATION # 2. Packing form 1. Package quantity: 100 pieces (1000 pieces) 2. Packing size: 1000mm x 1000mm x 100mm 3. Packing material: 1000mm x 1000mm x 100mm 	# 2. Packing form 1. Package quantity: 100 pieces (1000 pieces) 2. Packing size: 1000mm x 1000mm x 100mm 3. Packing material: 1000mm x 1000mm x 100mm 																																																														
0.4	Jan. 10. 2019	6	Add Color Gamut (CIE.1931) Spec	Color Gamut (CIE.1931) sRGB Typ. 100% Supporting (Coverage), sRGB Typ. 115% (Area)																																																														
		20	Add color gamut min spec Update color coordinate	<table><thead><tr><th colspan="2">Color gamut (CIE1931)</th><th>sRGB</th><th>95</th><th>100</th><th>%</th></tr></thead><tbody><tr><td>Rx</td><td></td><td>(0.660,TBD)</td><td></td><td></td><td></td></tr><tr><td>Ry</td><td></td><td>(0.327,TBD)</td><td></td><td></td><td></td></tr><tr><td>Gx</td><td></td><td>(0.292,TBD)</td><td></td><td></td><td></td></tr><tr><td>Gy</td><td>Typ.</td><td>(0.647,TBD)</td><td></td><td></td><td></td></tr><tr><td>Bx</td><td>-0.03</td><td>(0.148,TBD)</td><td></td><td></td><td></td></tr><tr><td>By</td><td></td><td>(0.058,TBD)</td><td></td><td></td><td></td></tr></tbody></table>	Color gamut (CIE1931)		sRGB	95	100	%	Rx		(0.660,TBD)				Ry		(0.327,TBD)				Gx		(0.292,TBD)				Gy	Typ.	(0.647,TBD)				Bx	-0.03	(0.148,TBD)				By		(0.058,TBD)																							
Color gamut (CIE1931)		sRGB	95	100	%																																																													
Rx		(0.660,TBD)																																																																
Ry		(0.327,TBD)																																																																
Gx		(0.292,TBD)																																																																
Gy	Typ.	(0.647,TBD)																																																																
Bx	-0.03	(0.148,TBD)																																																																
By		(0.058,TBD)																																																																
		27	<table><thead><tr><th>No.</th><th>Test Item</th><th>Condition</th></tr></thead><tbody><tr><td>1</td><td>High temperature storage test</td><td>Ta=85°C, 100h</td></tr><tr><td>2</td><td>Low temperature storage test</td><td>Ta=-40°C, 100h</td></tr><tr><td>3</td><td>High temperature operation test</td><td>Ta=85°C, 100h</td></tr><tr><td>4</td><td>Low temperature operation test</td><td>Ta=-40°C, 100h</td></tr><tr><td>5</td><td>Humidity</td><td>85%RH, 100h</td></tr><tr><td>6</td><td>Pressure</td><td>100h</td></tr></tbody></table>	No.	Test Item	Condition	1	High temperature storage test	Ta=85°C, 100h	2	Low temperature storage test	Ta=-40°C, 100h	3	High temperature operation test	Ta=85°C, 100h	4	Low temperature operation test	Ta=-40°C, 100h	5	Humidity	85%RH, 100h	6	Pressure	100h	<table><thead><tr><th>No.</th><th>Test Item</th><th>Condition</th><th>Notes</th></tr></thead><tbody><tr><td>1</td><td>High temperature storage test</td><td>Ta=85°C, 100h</td><td>1</td></tr><tr><td>2</td><td>Low temperature storage test</td><td>Ta=-40°C, 100h</td><td>1</td></tr><tr><td>3</td><td>High temperature operation test</td><td>Ta=85°C, 100h</td><td>1</td></tr><tr><td>4</td><td>Low temperature operation test</td><td>Ta=-40°C, 100h</td><td>1</td></tr><tr><td>5</td><td>Humidity</td><td>85%RH, 100h</td><td>1</td></tr><tr><td>6</td><td>Pressure</td><td>100h</td><td>1</td></tr></tbody></table>	No.	Test Item	Condition	Notes	1	High temperature storage test	Ta=85°C, 100h	1	2	Low temperature storage test	Ta=-40°C, 100h	1	3	High temperature operation test	Ta=85°C, 100h	1	4	Low temperature operation test	Ta=-40°C, 100h	1	5	Humidity	85%RH, 100h	1	6	Pressure	100h	1													
No.	Test Item	Condition																																																																
1	High temperature storage test	Ta=85°C, 100h																																																																
2	Low temperature storage test	Ta=-40°C, 100h																																																																
3	High temperature operation test	Ta=85°C, 100h																																																																
4	Low temperature operation test	Ta=-40°C, 100h																																																																
5	Humidity	85%RH, 100h																																																																
6	Pressure	100h																																																																
No.	Test Item	Condition	Notes																																																															
1	High temperature storage test	Ta=85°C, 100h	1																																																															
2	Low temperature storage test	Ta=-40°C, 100h	1																																																															
3	High temperature operation test	Ta=85°C, 100h	1																																																															
4	Low temperature operation test	Ta=-40°C, 100h	1																																																															
5	Humidity	85%RH, 100h	1																																																															
6	Pressure	100h	1																																																															

Ver. 1.0

4 / 32

Product specification


Record of revisions

Revision No.	Revision Date	Page	Before	After	Application Date																																																																																				
0.5	Apr. 23. 2019	18	Power sequence spec <table><thead><tr><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td>VDD</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDDA</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDD</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDDA</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDD</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDDA</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr></tbody></table>	Parameter	Min	Typ	Max	Unit	Notes	VDD	1.5	-	1.8	V		VDDA	1.5	-	1.8	V		VDD	1.5	-	1.8	V		VDDA	1.5	-	1.8	V		VDD	1.5	-	1.8	V		VDDA	1.5	-	1.8	V		Update power sequence spec <table><thead><tr><th>Parameter</th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th><th>Notes</th></tr></thead><tbody><tr><td>VDD</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDDA</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDD</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDDA</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDD</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr><tr><td>VDDA</td><td>1.5</td><td>-</td><td>1.8</td><td>V</td><td></td></tr></tbody></table>	Parameter	Min	Typ	Max	Unit	Notes	VDD	1.5	-	1.8	V		VDDA	1.5	-	1.8	V		VDD	1.5	-	1.8	V		VDDA	1.5	-	1.8	V		VDD	1.5	-	1.8	V		VDDA	1.5	-	1.8	V		Apr.23.2019
Parameter	Min	Typ	Max	Unit	Notes																																																																																				
VDD	1.5	-	1.8	V																																																																																					
VDDA	1.5	-	1.8	V																																																																																					
VDD	1.5	-	1.8	V																																																																																					
VDDA	1.5	-	1.8	V																																																																																					
VDD	1.5	-	1.8	V																																																																																					
VDDA	1.5	-	1.8	V																																																																																					
Parameter	Min	Typ	Max	Unit	Notes																																																																																				
VDD	1.5	-	1.8	V																																																																																					
VDDA	1.5	-	1.8	V																																																																																					
VDD	1.5	-	1.8	V																																																																																					
VDDA	1.5	-	1.8	V																																																																																					
VDD	1.5	-	1.8	V																																																																																					
VDDA	1.5	-	1.8	V																																																																																					
		20	CR soec MIN : 700 / TYP : 1000	CR soec MIN : 910 / TYP : 1300	Apr.23.2019																																																																																				
0.6	May.15.2019	16	Add vby1 data mapping		May.15.2019																																																																																				
		26	Update drawings		May.15.2019																																																																																				
0.7	Sep.5.2019	25,26	<table><thead><tr><th>Color</th><th>Rx</th><th>Ry</th><th>Gx</th><th>Gy</th><th>Bx</th><th>By</th><th>Typ.</th></tr></thead><tbody><tr><td>Red</td><td>(0.660 TBD)</td><td>(0.327 TBD)</td><td>(0.292 TBD)</td><td>(0.647 TBD)</td><td>(0.148 TBD)</td><td>(0.058 TBD)</td><td>-0.03</td></tr><tr><td>Green</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Blue</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Color	Rx	Ry	Gx	Gy	Bx	By	Typ.	Red	(0.660 TBD)	(0.327 TBD)	(0.292 TBD)	(0.647 TBD)	(0.148 TBD)	(0.058 TBD)	-0.03	Green								Blue								<table><thead><tr><th>Color</th><th>Rx</th><th>Ry</th><th>Gx</th><th>Gy</th><th>Bx</th><th>By</th><th>Typ.</th></tr></thead><tbody><tr><td>Red</td><td>0.660</td><td>0.327</td><td>0.295</td><td>0.645</td><td>0.150</td><td>0.060</td><td>-0.03</td></tr><tr><td>Green</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Blue</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Color	Rx	Ry	Gx	Gy	Bx	By	Typ.	Red	0.660	0.327	0.295	0.645	0.150	0.060	-0.03	Green								Blue								Sep.5.2019																				
Color	Rx	Ry	Gx	Gy	Bx	By	Typ.																																																																																		
Red	(0.660 TBD)	(0.327 TBD)	(0.292 TBD)	(0.647 TBD)	(0.148 TBD)	(0.058 TBD)	-0.03																																																																																		
Green																																																																																									
Blue																																																																																									
Color	Rx	Ry	Gx	Gy	Bx	By	Typ.																																																																																		
Red	0.660	0.327	0.295	0.645	0.150	0.060	-0.03																																																																																		
Green																																																																																									
Blue																																																																																									
1.0	Sep.19.2019	20	1) Color gamut : min 95% , typ 100%)) 2) Color coordinates	1) Min 95%	Sep.19.2019																																																																																				
		25,26	<table><thead><tr><th>Color</th><th>Rx</th><th>Ry</th><th>Gx</th><th>Gy</th><th>Bx</th><th>By</th><th>Typ.</th></tr></thead><tbody><tr><td>Red</td><td>(0.660 TBD)</td><td>(0.327 TBD)</td><td>(0.292 TBD)</td><td>(0.647 TBD)</td><td>(0.148 TBD)</td><td>(0.058 TBD)</td><td>-0.03</td></tr><tr><td>Green</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Blue</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Color	Rx	Ry	Gx	Gy	Bx	By	Typ.	Red	(0.660 TBD)	(0.327 TBD)	(0.292 TBD)	(0.647 TBD)	(0.148 TBD)	(0.058 TBD)	-0.03	Green								Blue								<table><thead><tr><th>Color</th><th>Rx</th><th>Ry</th><th>Gx</th><th>Gy</th><th>Bx</th><th>By</th><th>Typ.</th></tr></thead><tbody><tr><td>Red</td><td>0.660</td><td>0.327</td><td>0.295</td><td>0.645</td><td>0.150</td><td>0.060</td><td>-0.03</td></tr><tr><td>Green</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Blue</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>	Color	Rx	Ry	Gx	Gy	Bx	By	Typ.	Red	0.660	0.327	0.295	0.645	0.150	0.060	-0.03	Green								Blue								Sep.19.2019																				
Color	Rx	Ry	Gx	Gy	Bx	By	Typ.																																																																																		
Red	(0.660 TBD)	(0.327 TBD)	(0.292 TBD)	(0.647 TBD)	(0.148 TBD)	(0.058 TBD)	-0.03																																																																																		
Green																																																																																									
Blue																																																																																									
Color	Rx	Ry	Gx	Gy	Bx	By	Typ.																																																																																		
Red	0.660	0.327	0.295	0.645	0.150	0.060	-0.03																																																																																		
Green																																																																																									
Blue																																																																																									
			1) Update safty, Environment spec	7.1.Safety 4) IEC 62368-1, The International Electrotechnical Commission(IEC), Audio/Video, Information and Communication Technology Equipment - Safety - Safety Requirements. 5) EN 62368-1, European Committee for Electrotechnical Standardization (CENELEC), Audio/Video, Information and Communication Technology Equipment - Safety Requirements. 6) UL 62368-1, UL, U.S.																																																																																					
Ver. 1.0			2019		5 / 32																																																																																				

Product specification

1. General description

LB315WRM-SVA1 is a color active matrix liquid crystal display with a light emitting diode (WLED) backlight assembly without LED driver. The matrix employs a-Si thin film transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 31.5 inch diagonally measured active display area with UHD resolution.(3840 horizontal by 2160 vertical pixels array)
Each pixel is divided into red, green and blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 10-bit gray scale signal for each dot, thus, presenting a palette of more than 1.07Billion colors. It has been designed to apply 10-bit 8 Lane V by one interface. It is intended to support displays where high brightness, super wide viewing angle, high color saturation, and high color are important.

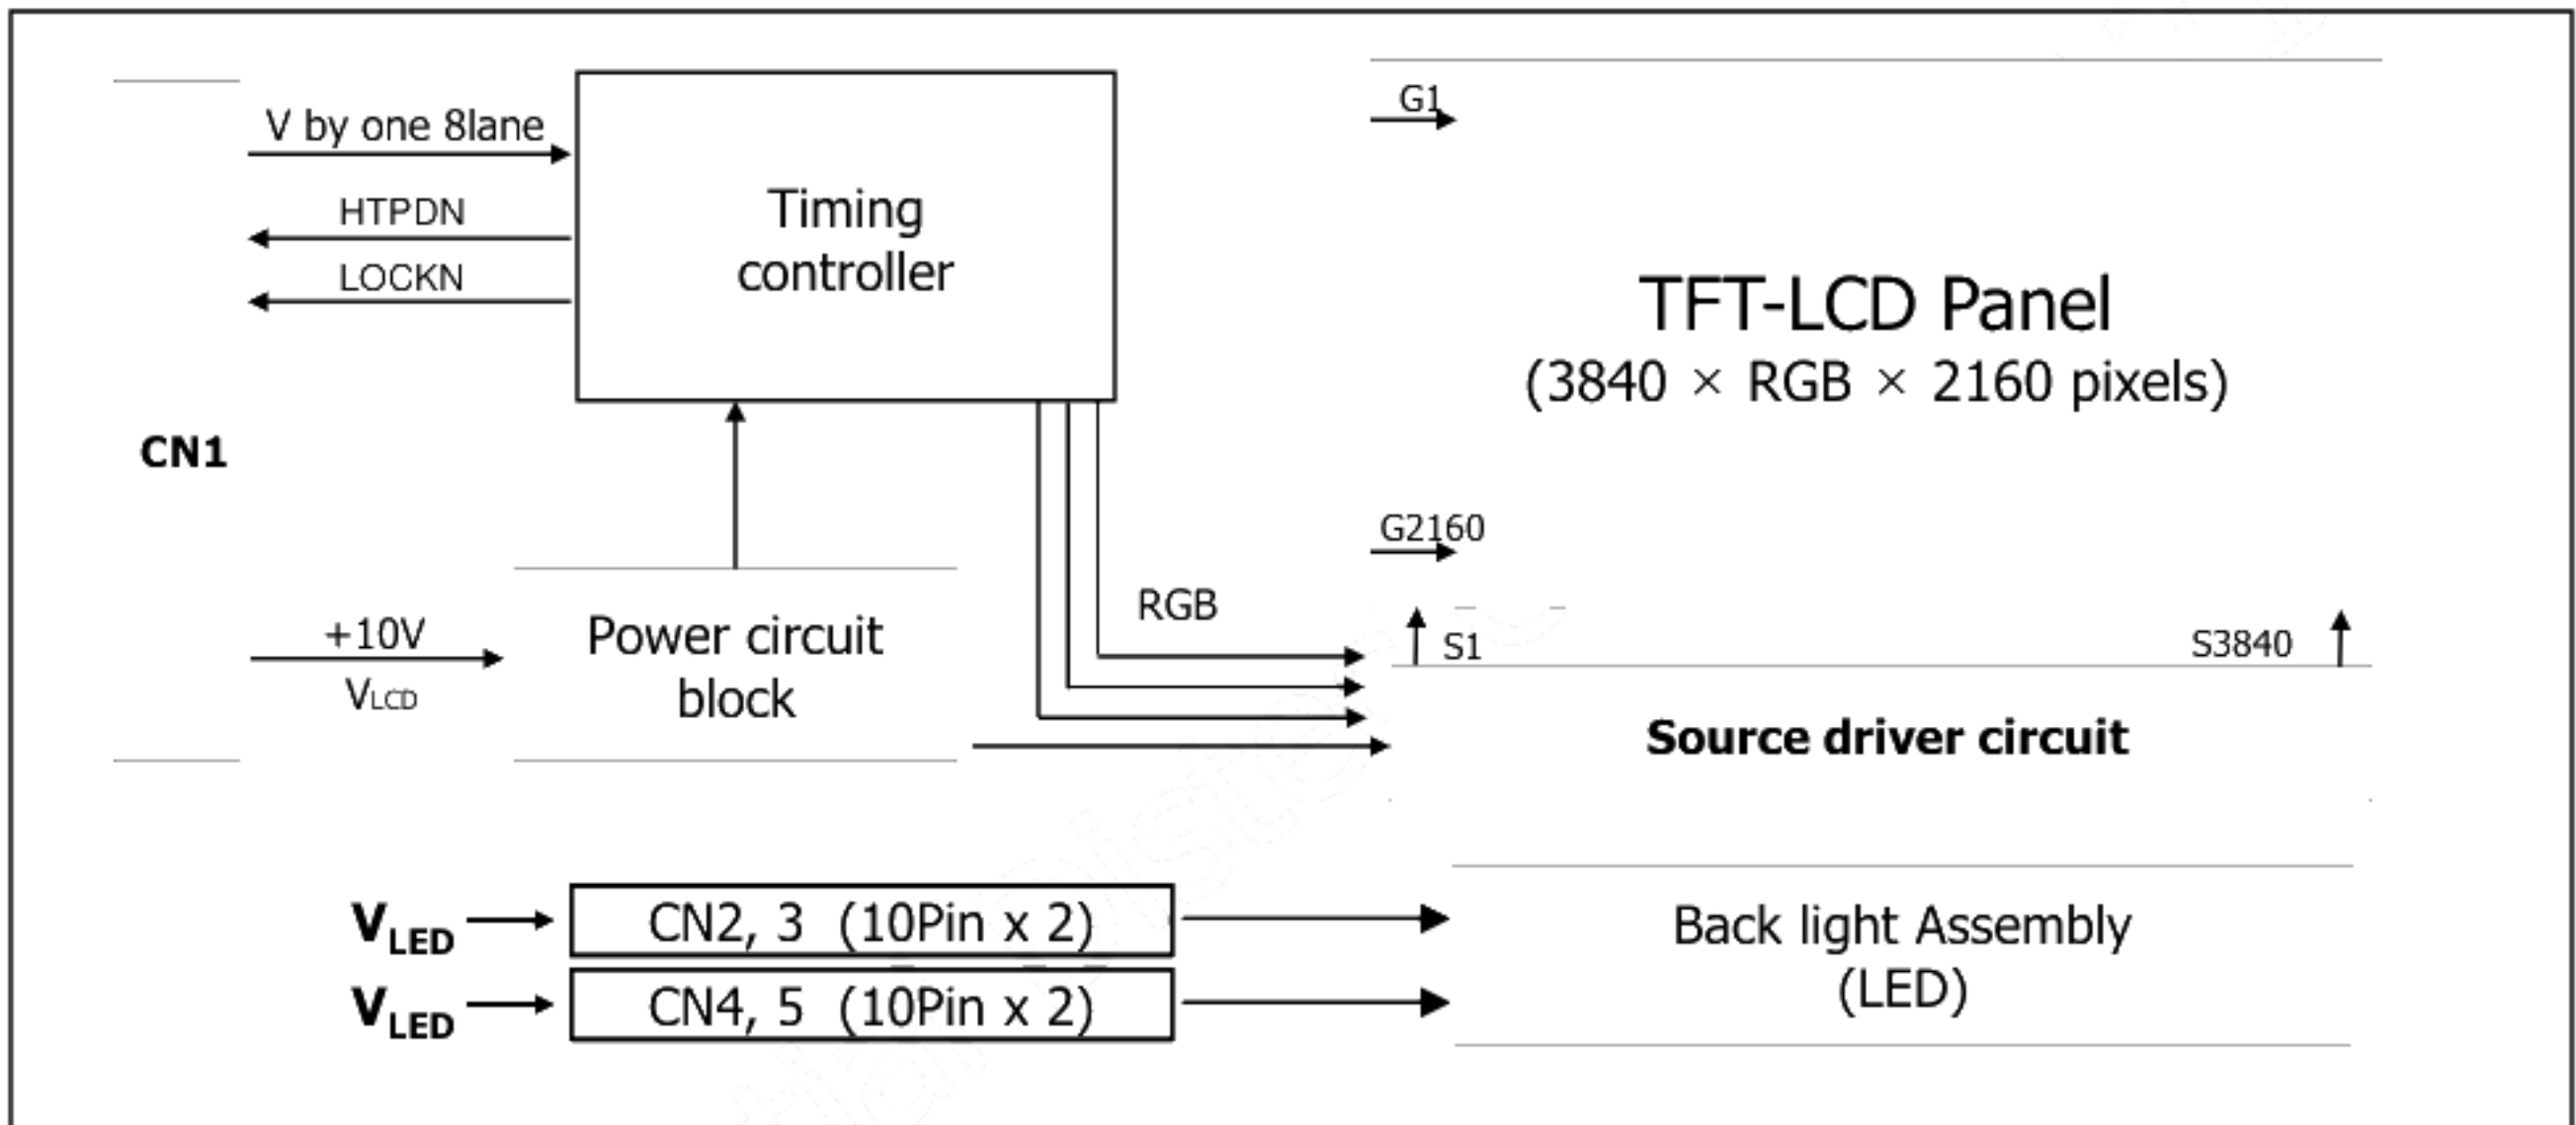

[FIG. 1] Block diagram

General features

Active screen size	31.5 inches(80.0051cm) (Aspect ratio 16:9)
Outline dimension	730.7 (H) x 425.2 (V) x 23.0 (D) mm (Typ.)
Pixel pitch	0.18159(H)mm x 0.18159(V)mm
Pixel format	3840(H) x 2160(V) Pixels. RGB stripes arrangement
Color depth	1.07Billion colors
Color Gamut (CIE.1931)	sRGB Typ.100% Supporting (Cover ratio) , sRGB Typ. 115% (Area)
Luminance (@White)	1000 cd/m ² (Center 1 Point, Typ.)
Viewing angle(CR>10)	View angle free (R/L 178(Typ.), U/D 178(Typ.))
Power consumption	Total (81.9)Watt ((10.5) Watt @V _{LCD} , (71.4)Watt @Is=(85)mA)
Weight	6000g (Typ.)
Display operating mode	Transmissive mode, normally black
Panel type	Reverse type
Surface treatment	Anti-glare treatment of the front polarizer (Haze 25%, 3H)

Product specification

2. Absolute maximum ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.


Table 1. Absolute maximum ratings

Parameter	Symbol	Values		Units	Notes
		Min.	Max.		
Power supply input voltage	V_{LCD}	-0.3	12	V_{DC}	At 25 °C
Operating temperature	T_{OP}	0	50	°C	1,2,3
Storage temperature	T_{ST}	-20	60	°C	
Operating ambient humidity	H_{OP}	10	90	%RH	
Storage humidity	H_{ST}	10	90	%RH	
LCM surface temperature (Operation)	$T_{Surface}$	0	65	°C	1, 4

Notes :

1. Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39 °C Max., and no condensation of water.
2. Maximum storage humidity is up to 40 °C, 70% RH only for 4 corner light leakage mura.
3. Storage condition is guaranteed under packing condition
4. LCM surface temperature should be measured under the condition of $V_{LCD}=10.0V$, $f_v=60Hz$, $T_a=25^{\circ}C$, no humidity and typical LED string current.
※. T_a = Ambient temperature

[FIG. 2] Temperature and relative humidity

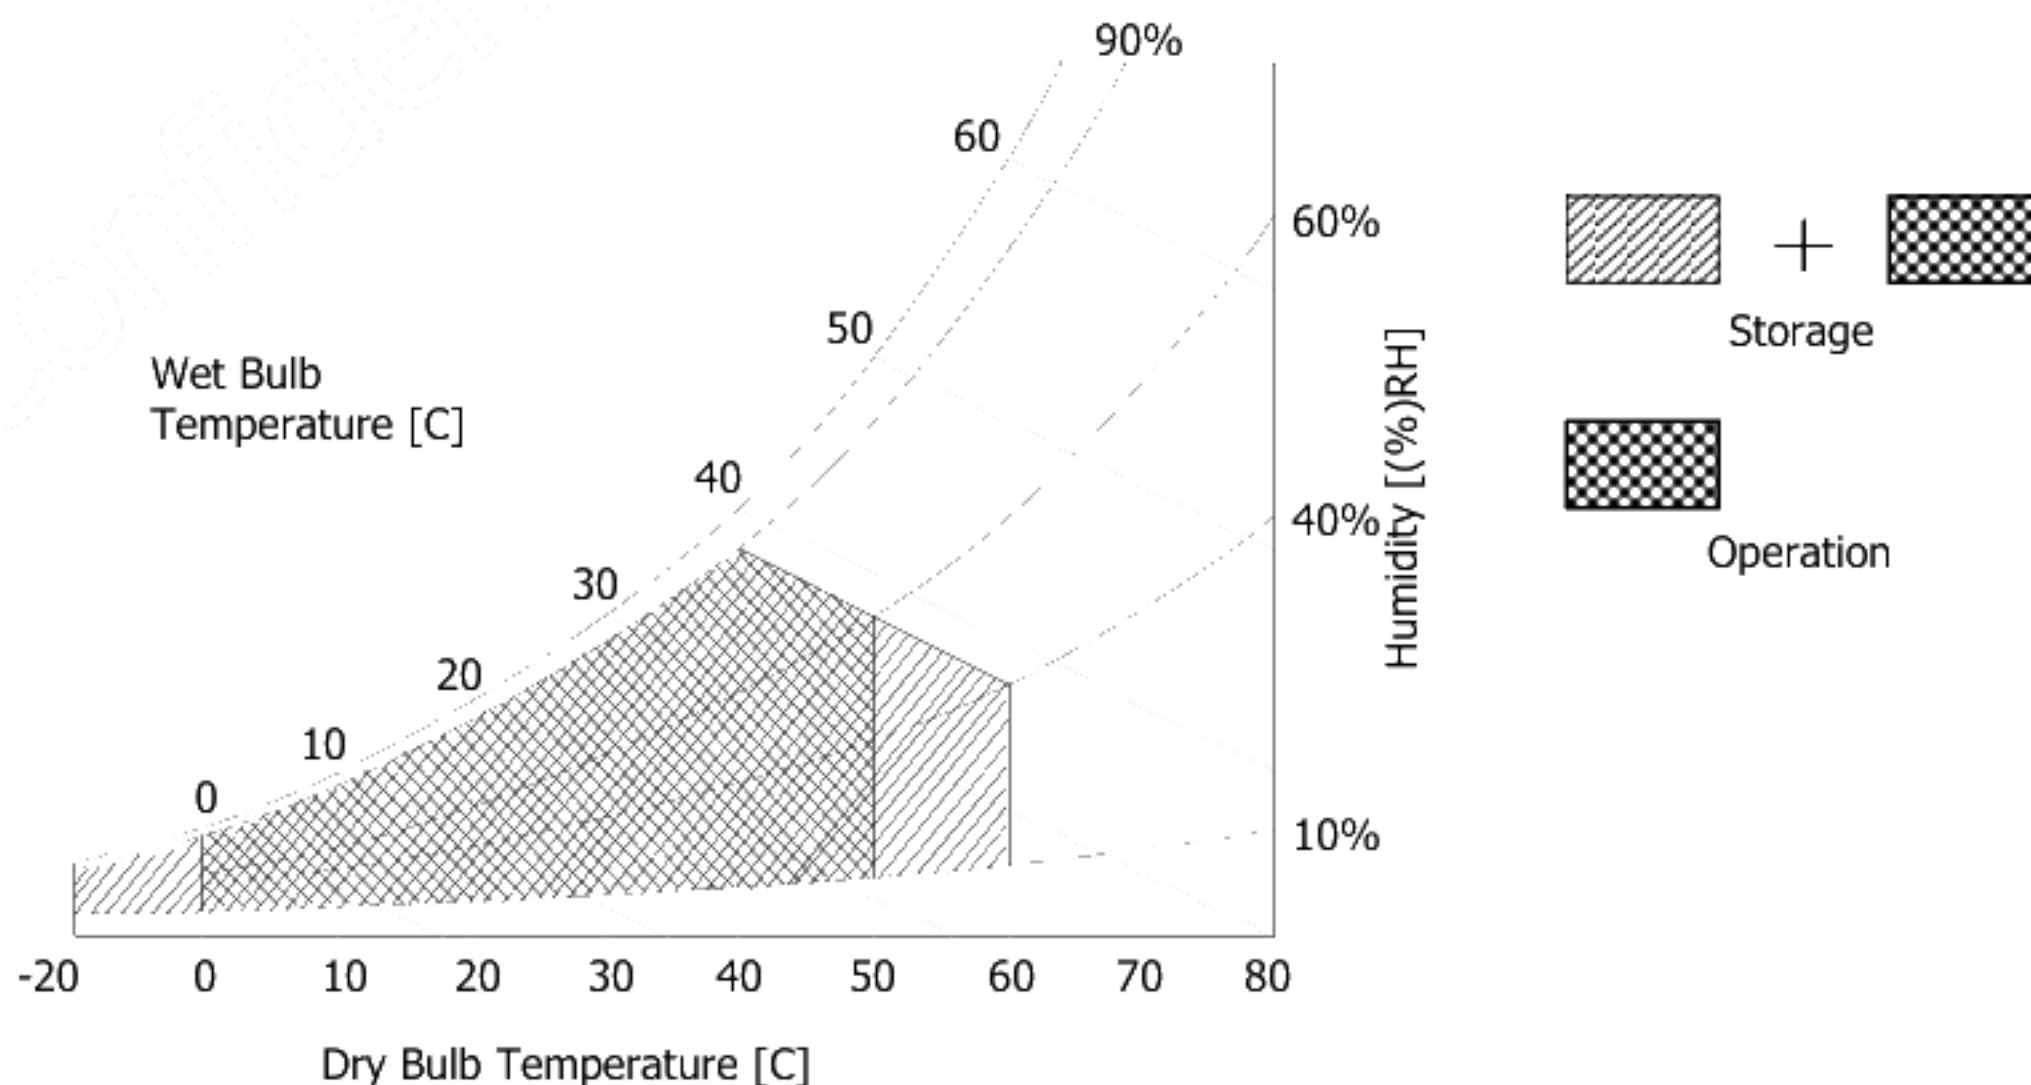

Product specification

3. Electrical specifications

3-1. Electrical characteristics

It requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The other input power for the LED/Backlight, is typically generated by a LED Driver. The LED Driver is an external unit to the LCDs.

Table 2-1. Electrical characteristics

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
MODULE :						
Power supply input voltage	V _{LCD}	9.5	10.0	10.5	V	4
Permissive power input ripple	V _{ripple}			400	mVp-p	1
Power supply input current	I _{LCD} Typ.	-	1.05	1.31	A	2
	I _{LCD} Max.	-	1.5	1.87	A	
Power consumption	Pc Typ.	-	10.5	13.1	Watt	
	Pc Max.	-	15	18.7	Watt	
Rush current	IRUSH	-		3.0	A	3


Notes :

1. Permissive power ripple should be measured under the condition of $V_{LCD}=10.0V$, $25^{\circ}C$, $*f_v=\max$.
Refer to page 7 for the pattern and more information.
2. The specified current and power consumption can be measured under the $V_{LCD}=10.0V$, $25^{\circ}C$, $f_v=60Hz$ and the pattern should be changed according to the typical or maximum power condition.
The max. current can be measured only with the maximum power pattern.
See the page 7 for details.
3. Maximum condition of inrush current :
The duration of rush current is about 5ms and rising time of power input is $500\mu s \pm 20\%$. (min.).
4. V_{LCD} level must be measured between two points on PCB of LCM [V_{LCD} (test point) ~ LCM Ground)
(Test condition : maximum power pattern, $25^{\circ}C$, $f_v=60Hz$)

* f_v =frame frequency

Product specification


- **Permissive power input ripple** ($V_{LCD} = 10.0V$, $25^{\circ}C$, f_v (frame frequency)=Max. condition)




White pattern

For the exact ripple measurement, the condition of max. 20Mhz is recommended in the bandwidth configuration of oscilloscope.

- **Power consumption** ($V_{LCD} = 10V$, $25^{\circ}C$, f_v (frame frequency)=60Hz condition)

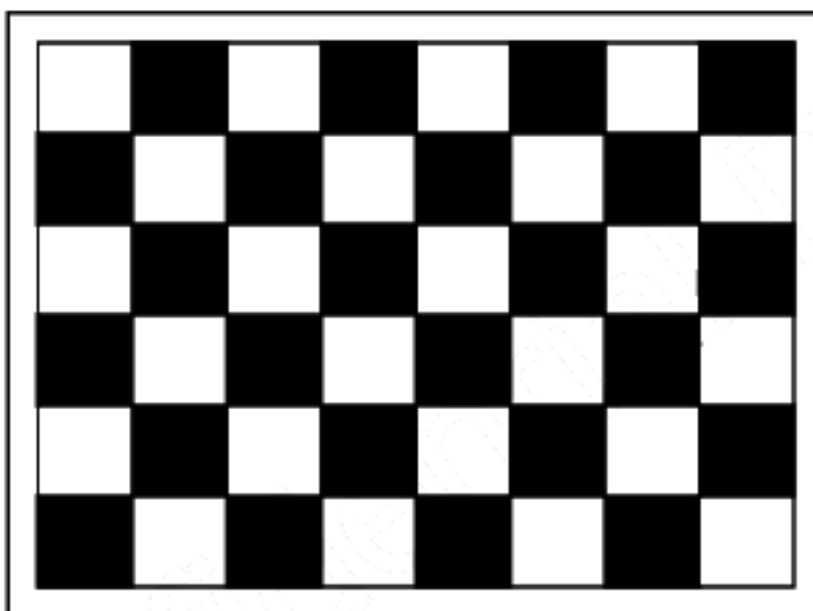

Typical power pattern



Maximum power pattern

[FIG. 3] Mosaic pattern & White pattern for power consumption measurement

Product specification
Table 2-2. Electrical characteristics of LED bar in normal operating condition

Parameter	Symbol	Values			Units	Notes
		Min.	Typ.	Max.		
LED string current	Is	-	85	90	mA	1, 2
LED string voltage	Vs	27.0	28.0	29.0	V	1, 3
Power consumption	PBar	-	71.4	74.0	Watt	1, 2, 5
LED life time	LED_LT	30,000	-	-	Hour	4

Notes : The LED bar consists of 150 LED packages, 15 strings parallel x 5 packages serial x 2bar

1. The specified values are for single LED bar.
2. The specified current is defined as the input current for single LED string with 100% duty cycle.
3. The specified voltage is the input LED string voltage at typical current 100% duty cycle.
4. The LED life time is defined as the time when brightness of LED itself reach to the 50% of initial value under the conditions at $T_a = 25 \pm 2^\circ\text{C}$ and typical LED string current.
5. The power consumption shown above does not include the loss of external LED driver.
 The typical power consumption is calculated as $P_{\text{Bar}} = V_s(\text{Typ.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.
 The maximum power consumption is calculated as $P_{\text{Bar}} = V_s(\text{Max.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.

Product specification

3-2. Interface connections

3-2-1. LCD Module


- LCD Connector(CN1) : GT05S-51S-H38(LS) or Equivalent

Table 3-1. Module connector (CN1) pin configuration

No	Symbol	Description	No	Symbol	Description
1	VLCD	Power Supply +10.0V	27	GND	Ground
2	VLCD	Power Supply +10.0V	28	RX0N	V-by-One HS Data Lane 0
3	VLCD	Power Supply +10.0V	29	RX0P	V-by-One HS Data Lane 0
4	VLCD	Power Supply +10.0V	30	GND	Ground
5	VLCD	Power Supply +10.0V	31	RX1N	V-by-One HS Data Lane 1
6	VLCD	Power Supply +10.0V	32	RX1P	V-by-One HS Data Lane 1
7	VLCD	Power Supply +10.0V	33	GND	Ground
8	VLCD	Power Supply +10.0V	34	RX2N	V-by-One HS Data Lane 2
9	NC	No Connection	35	RX2P	V-by-One HS Data Lane 2
10	GND	Ground	36	GND	Ground
11	GND	Ground	37	RX3N	V-by-One HS Data Lane 3
12	GND	Ground	38	RX3P	V-by-One HS Data Lane 3
13	GND	Ground	39	GND	Ground
14	GND	Ground	40	RX4N	V-by-One HS Data Lane 4
15	NC	No Connection	41	RX4P	V-by-One HS Data Lane 4
16	NC	No Connection	42	GND	Ground
17	NC	No Connection	43	RX5N	V-by-One HS Data Lane 5
18	NC	No Connection	44	RX5P	V-by-One HS Data Lane 5
19	NC	No Connection	45	GND	Ground
20	NC	No Connection	46	RX6N	V-by-One HS Data Lane 6
21	NC	No Connection	47	RX6P	V-by-One HS Data Lane 6
22	NC	No Connection	48	GND	Ground
23	NC	No Connection	49	RX7N	V-by-One HS Data Lane 7
24	NC	No Connection	50	RX7P	V-by-One HS Data Lane 7
25	HTPDN	Hot plug detect output, Open drain	51	GND	Ground
26	LOCKN	Lock detect output, Open drain	-	-	-

Notes :

1. All GND(ground) pins should be connected together to the LCD module's metal frame.
2. All VLCD (input power) pins should be connected together.

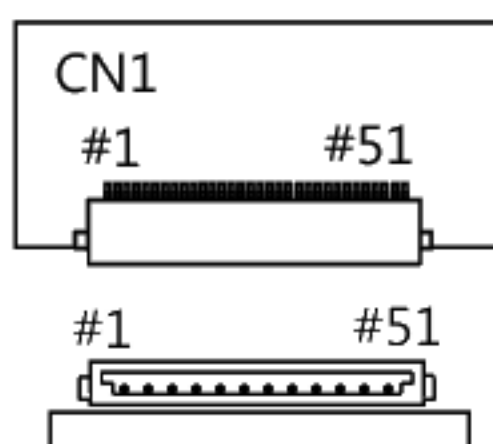

[CN1]

- Part/No. : GT05S-51S-H38(LS) or Equivalent
- Mating connector : FI-RE51HL(Manufactured by JAE)

[FIG. 4] Connector diagram

Product specification

3-2-2. V by One input signal Characteristics

1. V by One input signal timing diagram

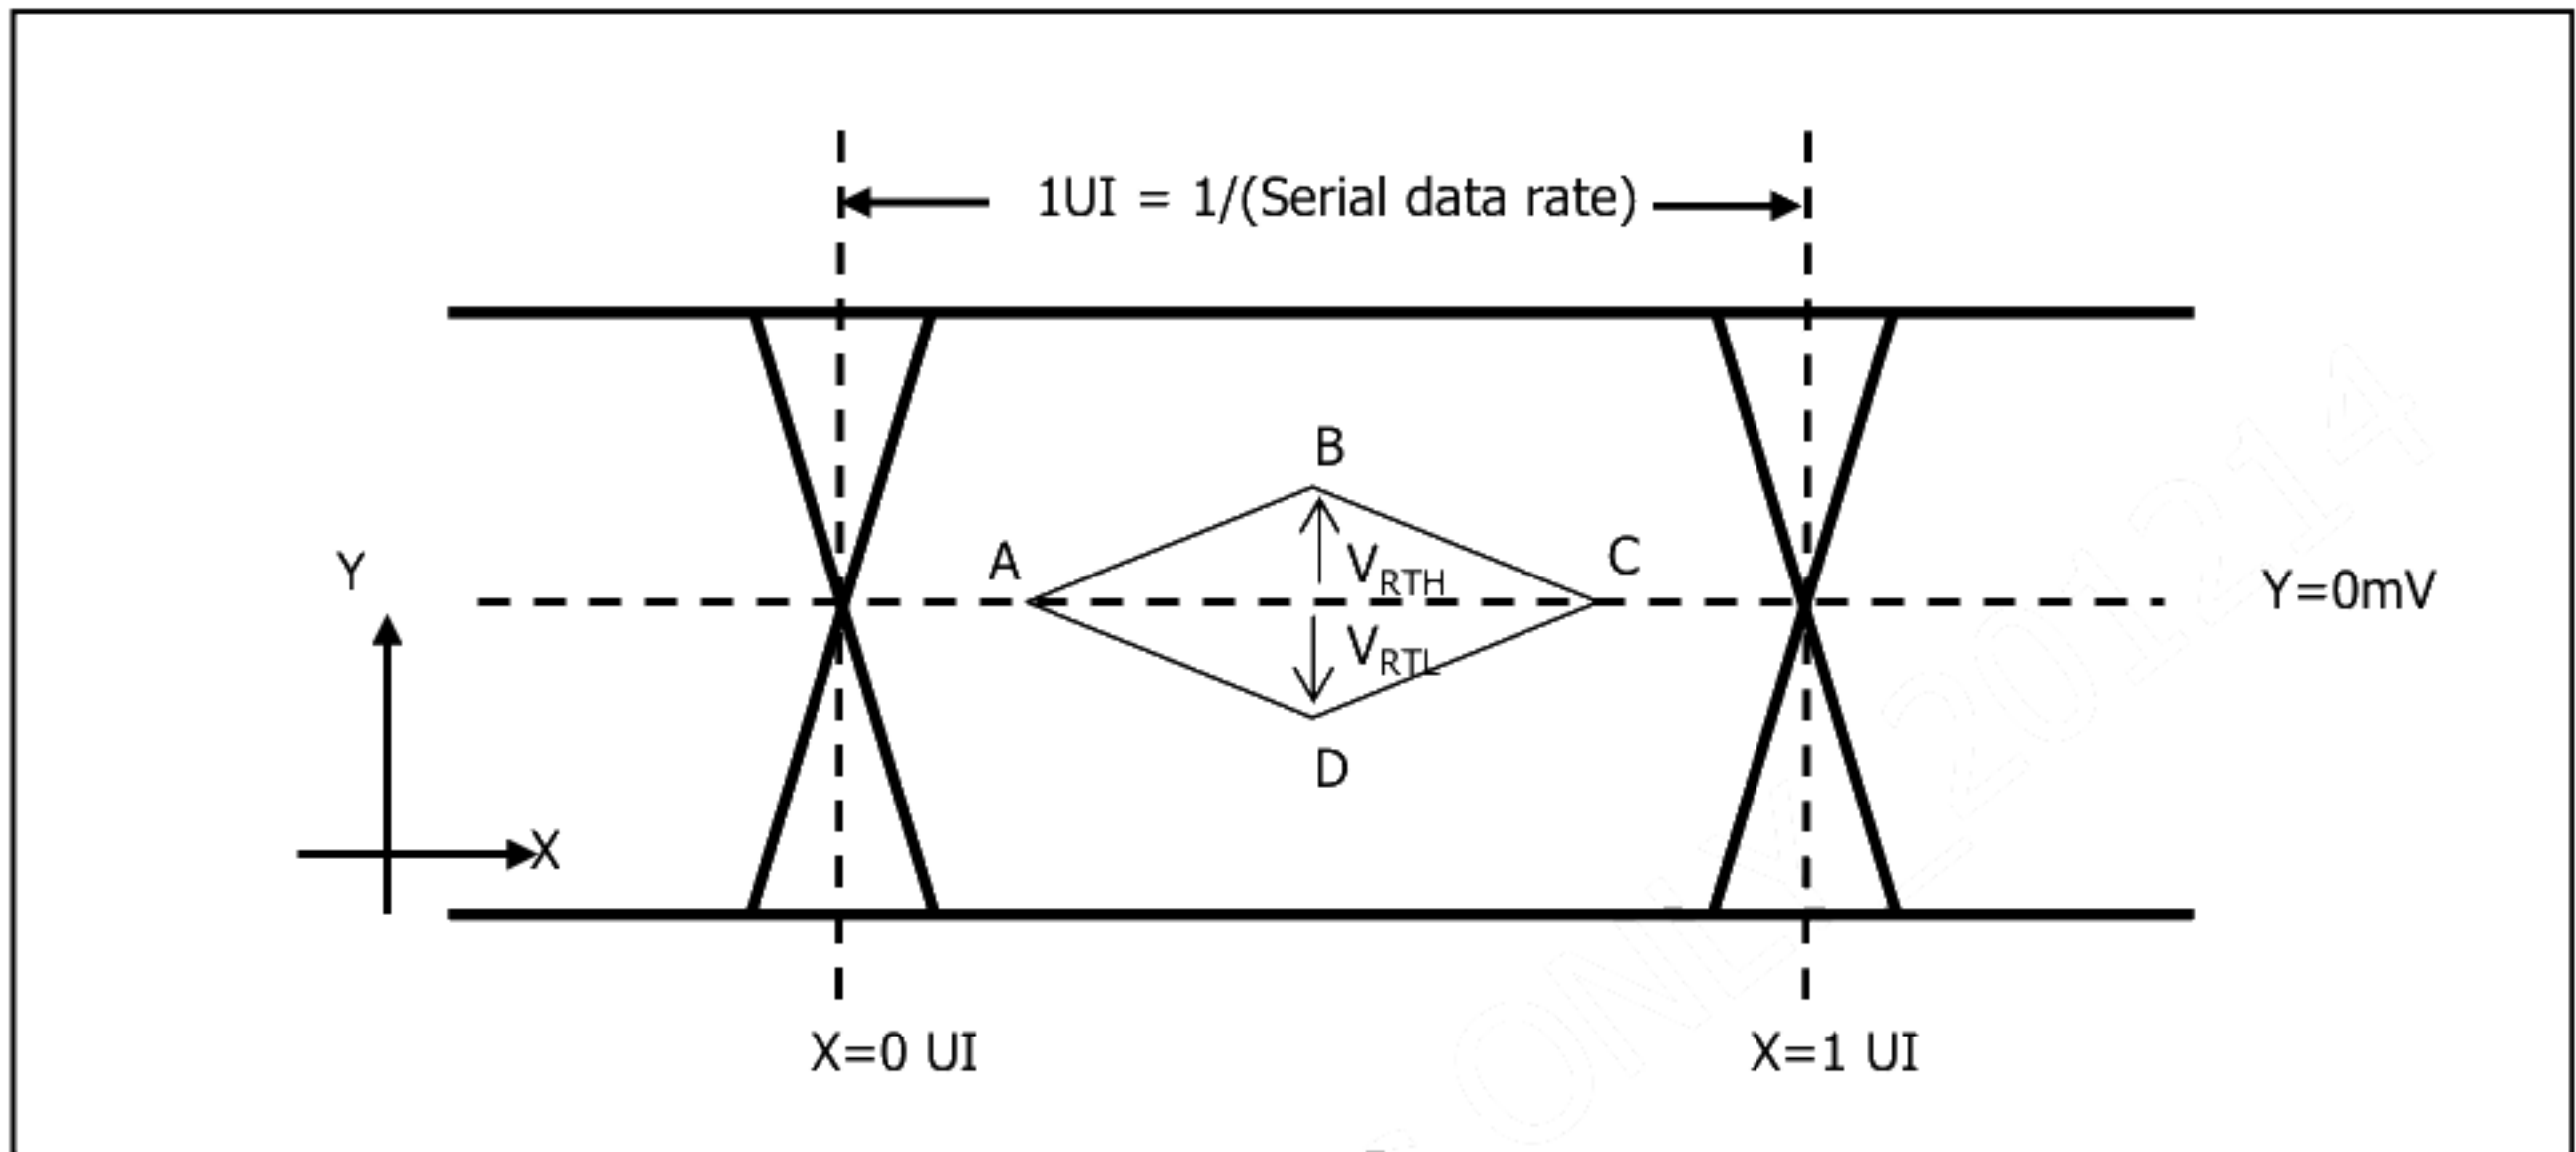


Table 3-2. Eye Mask Specification


Symbol	X[UI]	Y[mV]	Note
A	0.25 (max)	0	-
B	0.5	50 (min)	V_{RTH}
C	0.75 (min)	0	-
D	0.5	-50 (min)	V_{RTL}

Notes

- All Input levels of V by One signals are based on the V by One HS Standard Ver. 1.4
- The eye diagram is measured by the oscilloscope and receiver CDR characteristic must be emulated.
 - PLL Type : Second Order
 - PLL bandwidth : 15MHz
 - Damping Factor : 1

Product specification

2. V by One input signal characteristics

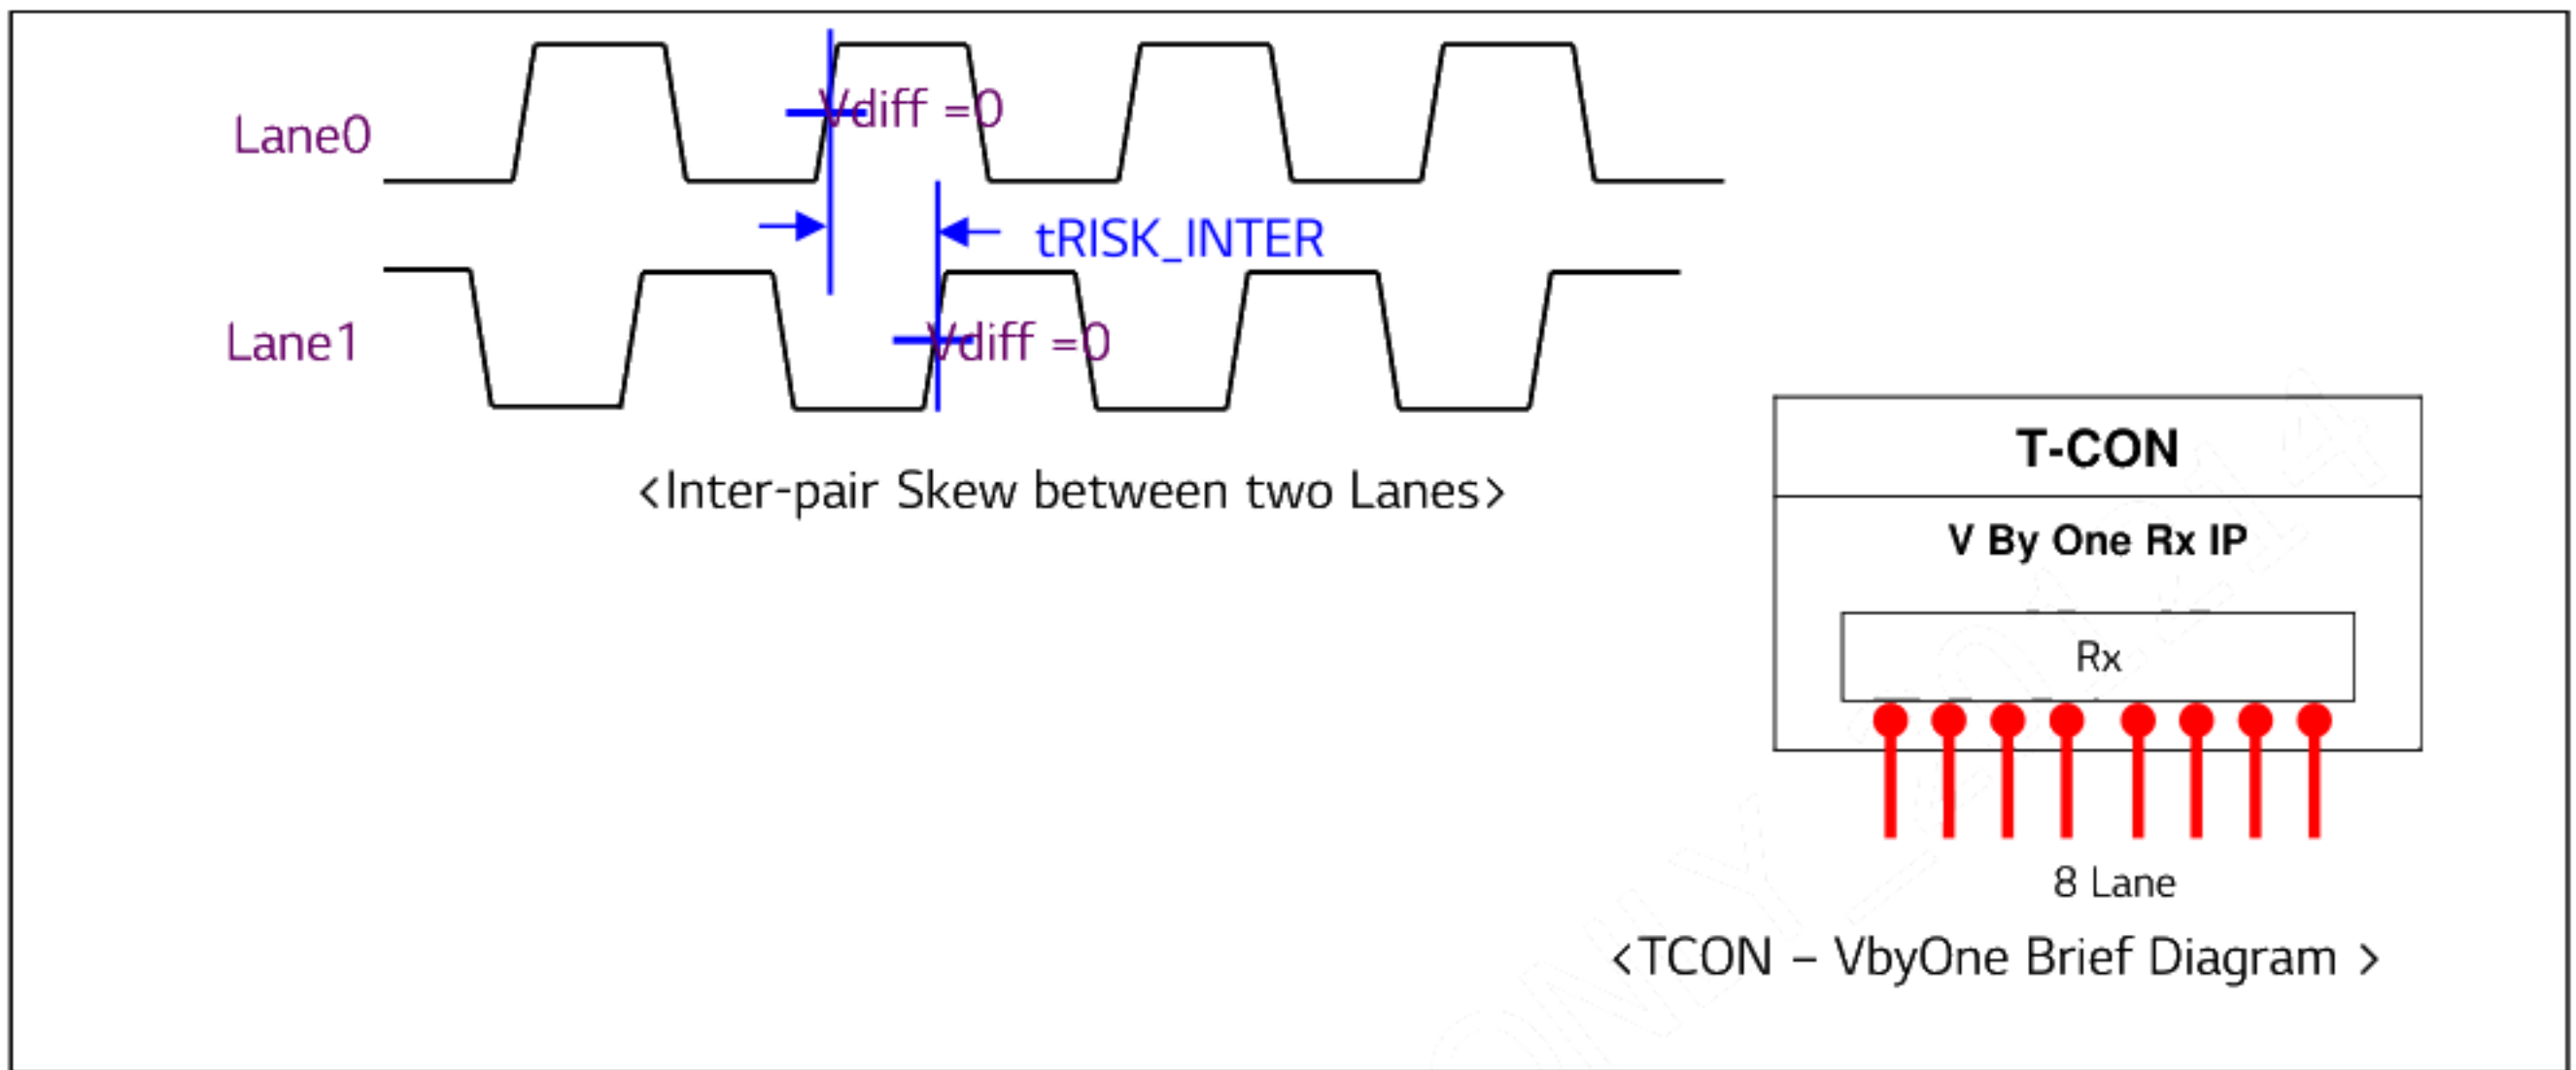


Description	Symbol	Min	Max	Unit	notes
Allowable inter-pair skew between lanes	t_{RISK_INTER}	-	5	UI	1,2

Notes

1. $1UI = 1/\text{serial data rate}$
2. It is the time difference of the differential voltage between any two lanes in one sub block.

Product specification


2. V by One input signal characteristics

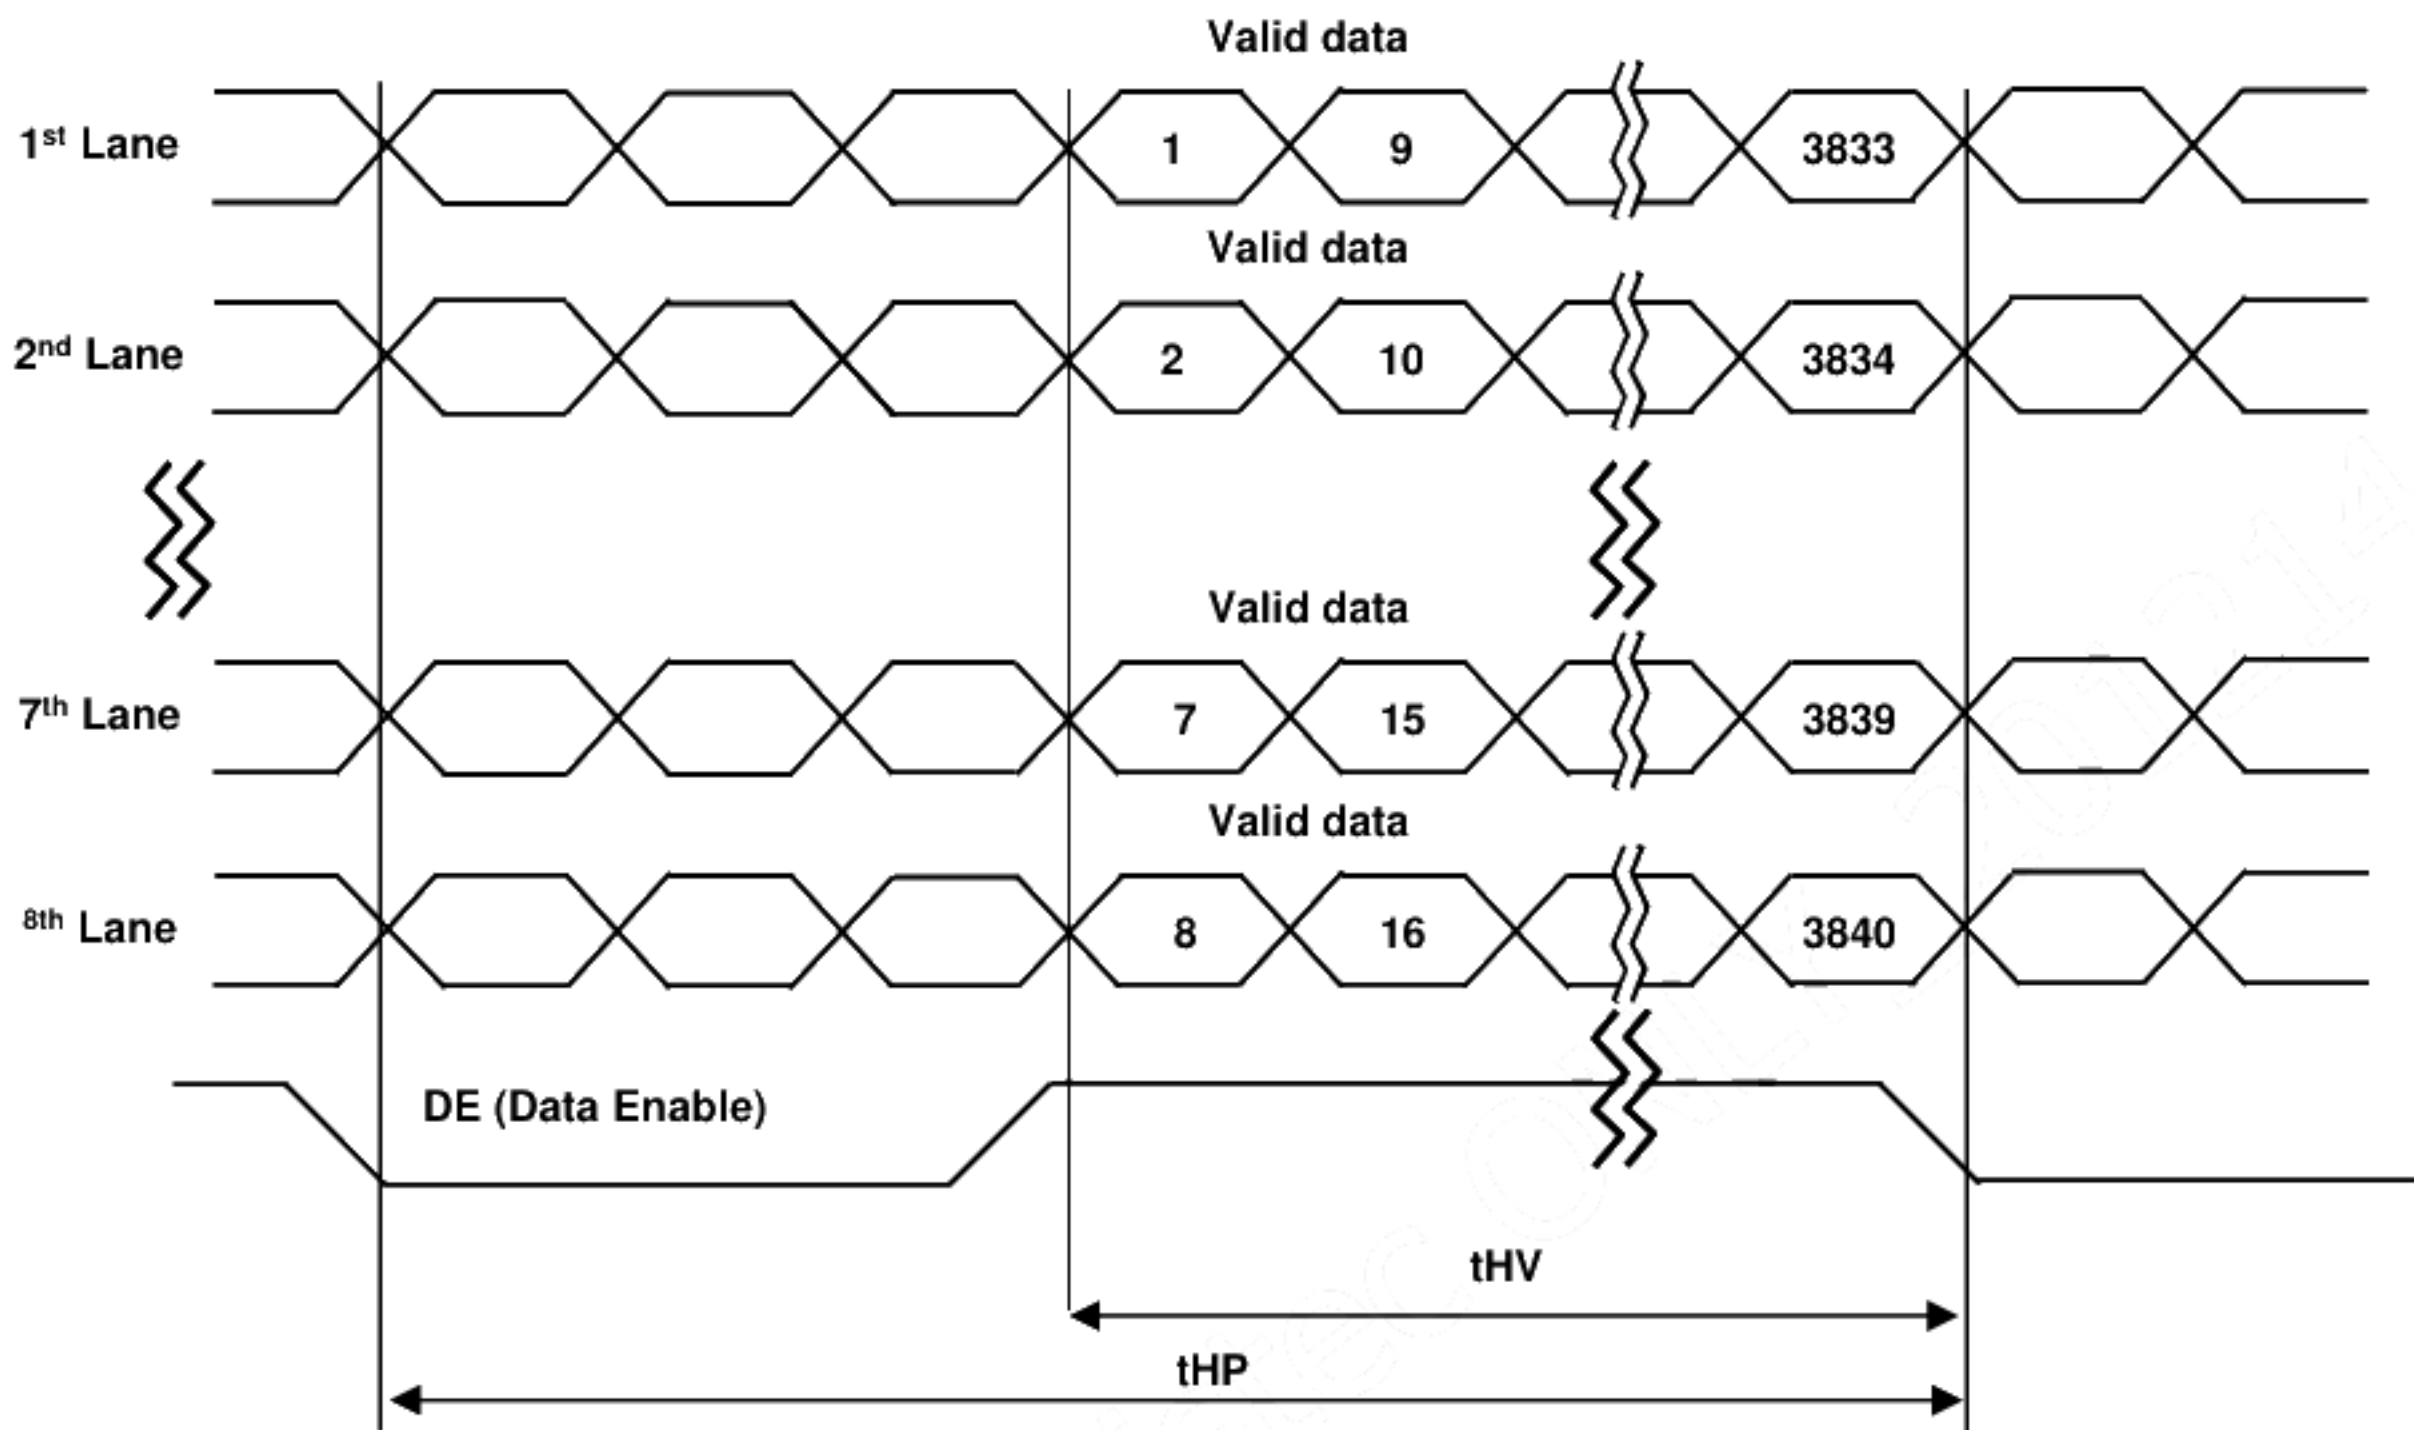

* Reference : Sync. Relation

$$* t_{HB} = t_{HFP} + t_{WH} + t_{HBP}$$

$$* t_{VB} = t_{VFP} + t_{WV} + t_{VBP}$$

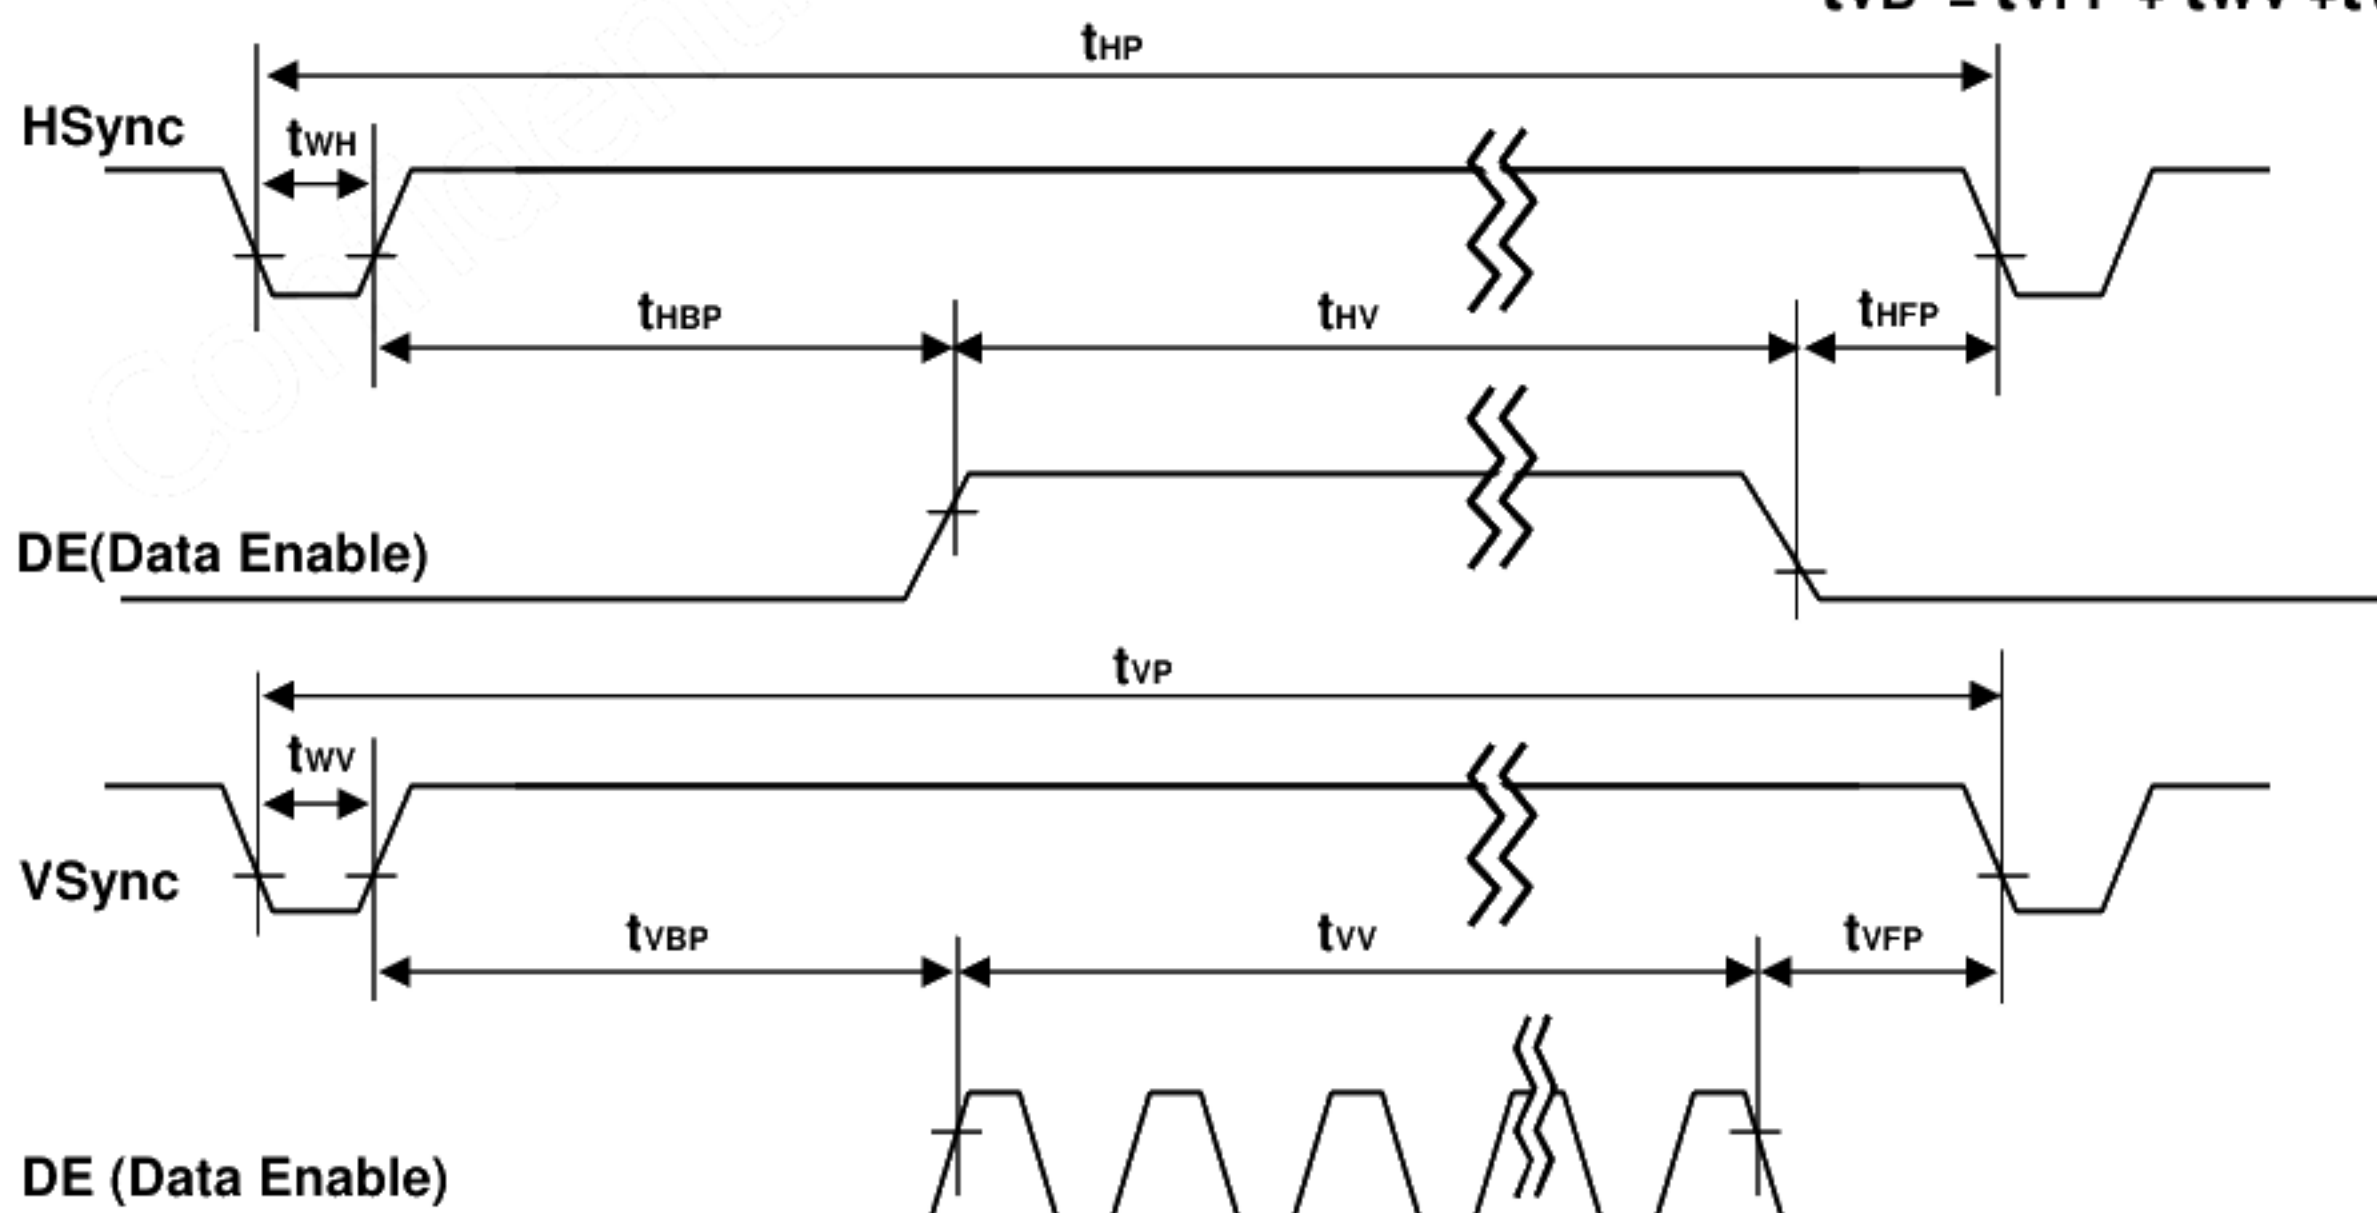

Product specification

3-2-3. Backlight connector pin configuration


Table 4. Backlight connector pin configuration(CN2 ~ CN5)

The LED wire cable connector is a model 12507HS-H10G1 Manufactured by Yeonho.

The mating connector is a 12507WR-H10G.

The pin configuration for the connector is shown in the table below.

Pin	Symbol	Pin-description (CN3, CN4)	Remark	Pin	Symbol	Pin-description (CN2, CN5)	Remark
#1	FB1	Channel1 Current Feedback	Left-down side(CN4) & Right-up Side(CN3) in front view	#1	FB1	Channel1 Current Feedback	Right-down side(CN5) & Left-up Side(CN2) in front view
#2	FB2	Channel2 Current Feedback		#2	FB2	Channel2 Current Feedback	
#3	FB3	Channel3 Current Feedback		#3	FB3	Channel3 Current Feedback	
#4	FB4	Channel4 Current Feedback		#4	NC	NC	
#5	V LED	LED power supply (FB1~FB4)		#5	V LED	LED power supply (FB1~FB3)	
#6	V LED	LED power supply (FB5~FB8)		#6	V LED	LED power supply (FB4~FB7)	
#7	FB5	Channel5 Current Feedback		#7	FB4	Channel4 Current Feedback	
#8	FB6	Channel6 Current Feedback		#8	FB5	Channel5 Current Feedback	
#9	FB7	Channel7 Current Feedback		#9	FB6	Channel6 Current Feedback	
#10	FB8	Channel8 Current Feedback		#10	FB7	Channel7 Current Feedback	

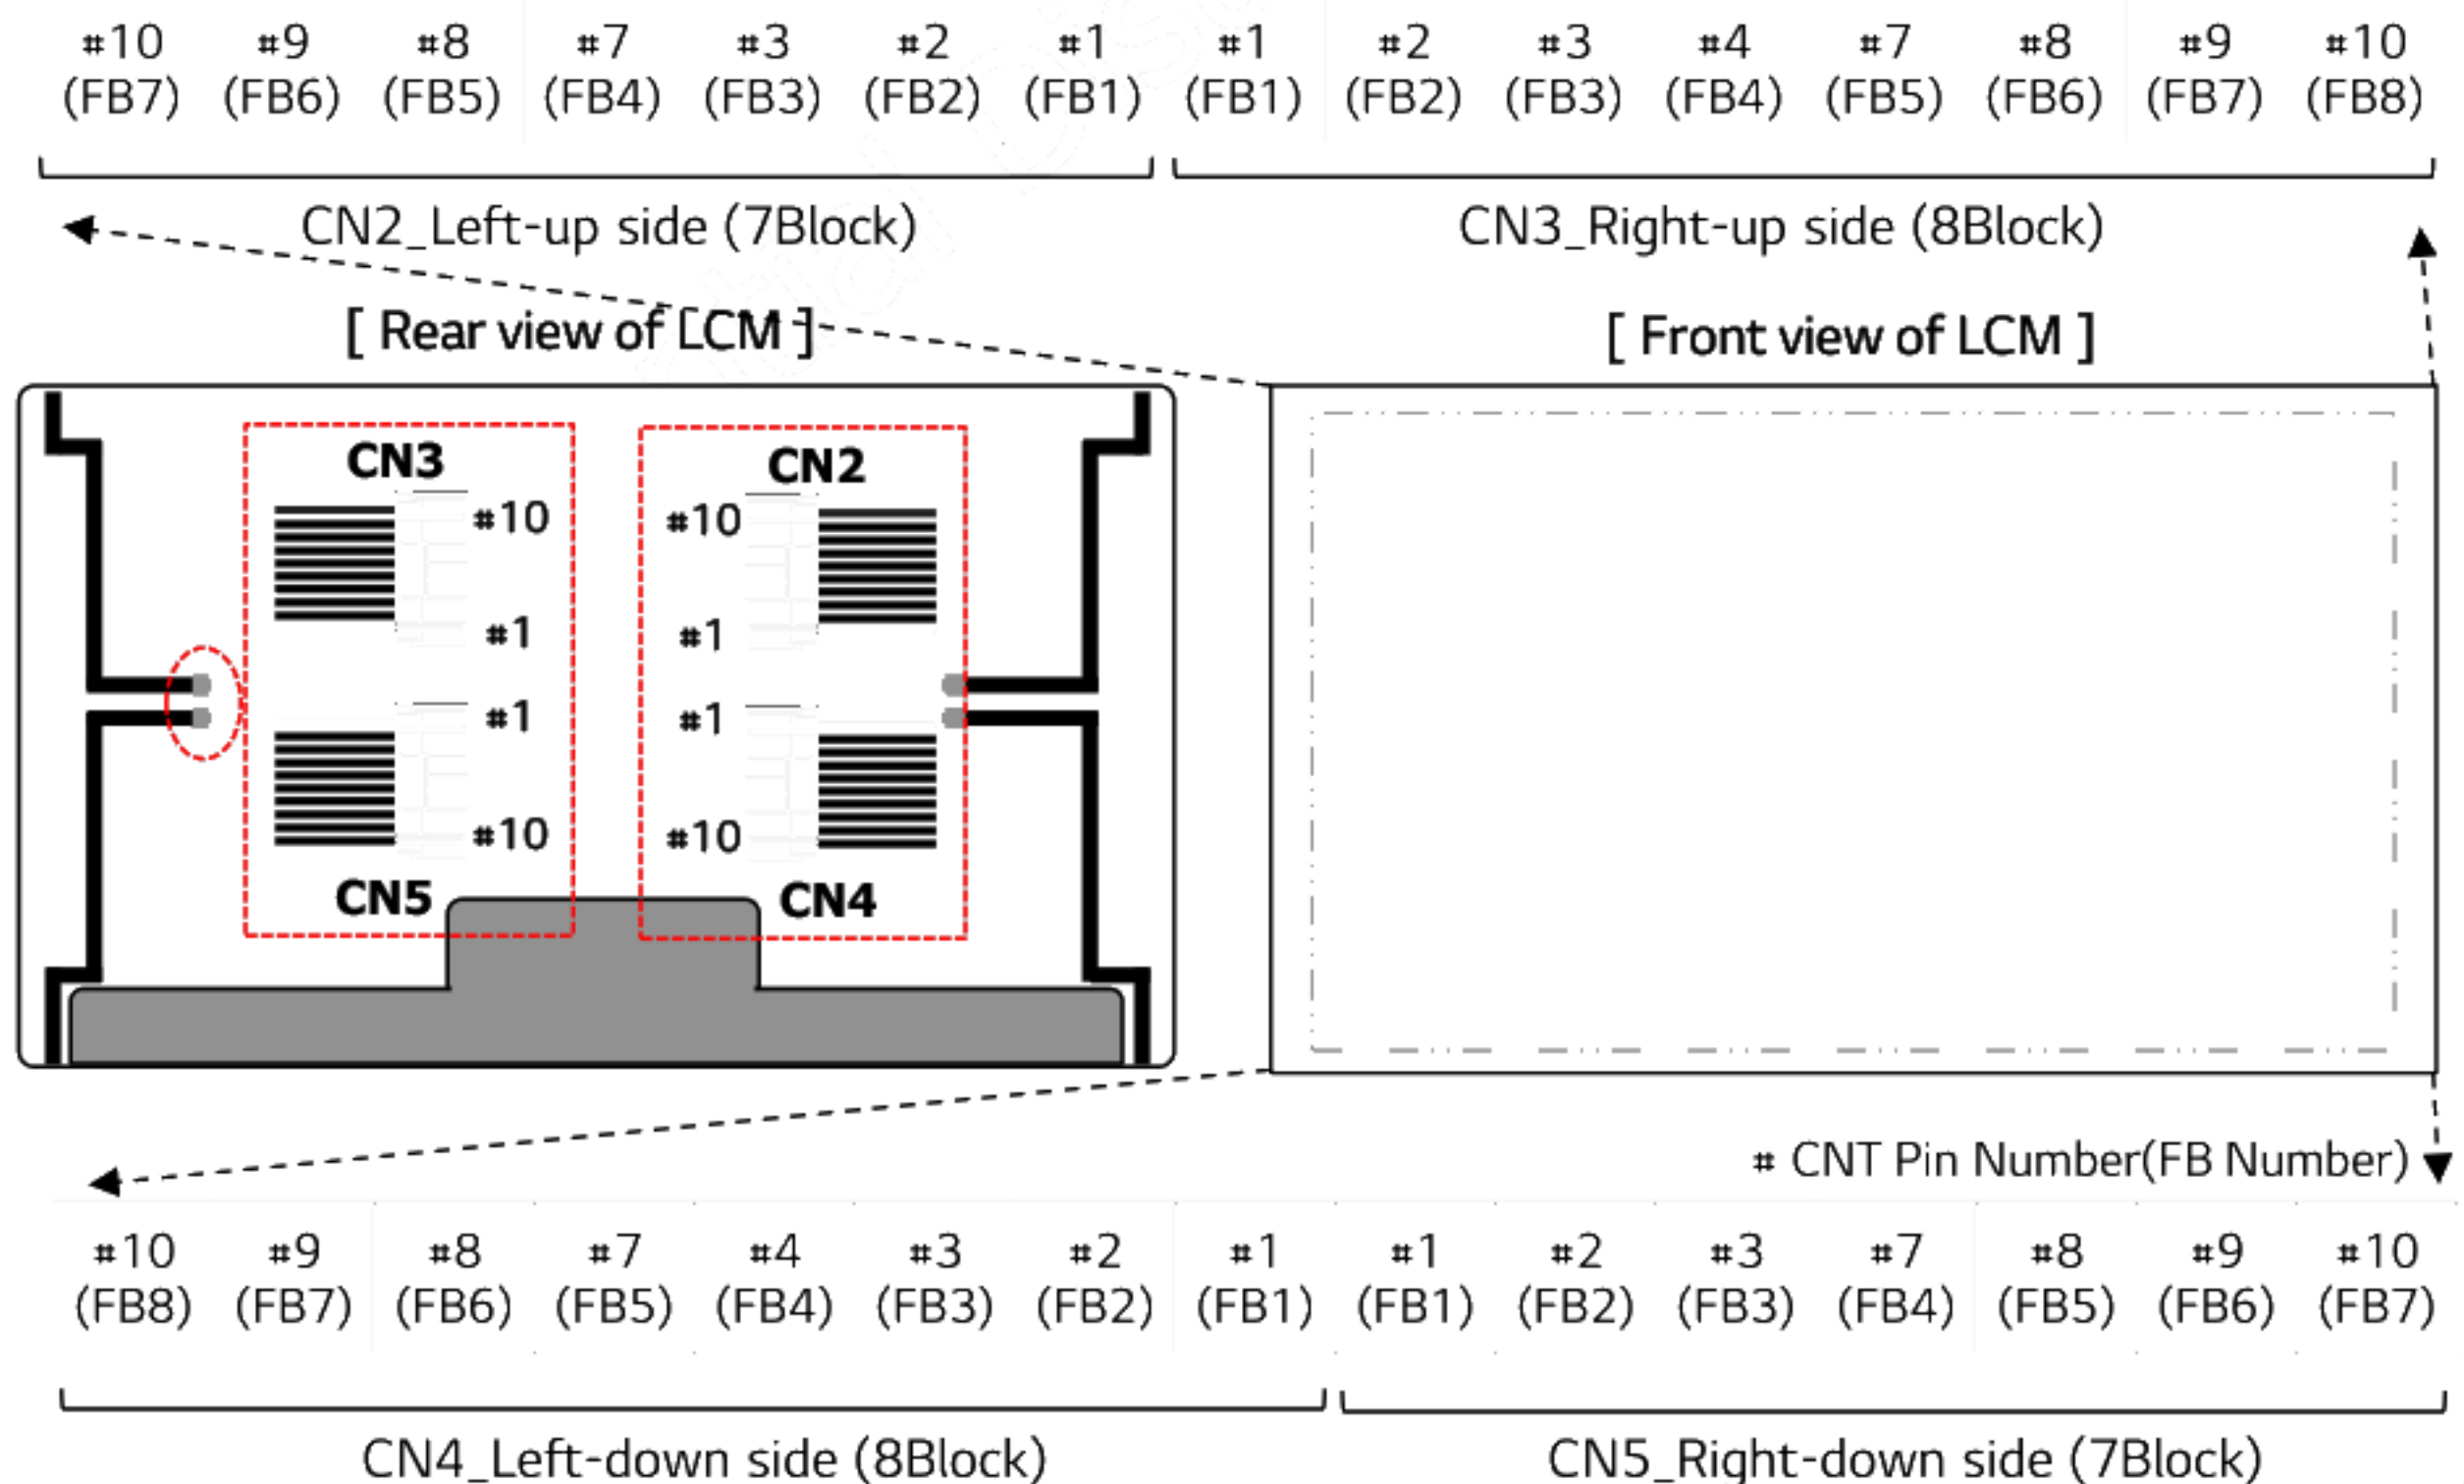

[FIG. 5] Backlight connector view

Product specification

3-3. Signal timing specifications

This is signal timing requirement from the signal transmitter. All of the interface signal timing should satisfy the following specifications for its proper operation.

Table 5. Timing table

ITEM		Symbol	Min	Typ	Max	Unit	Note
Horizontal	Display Period	tHV	480	480	480	tCLK	3840/8
	Blank	tHB	60	70	120	tCLK	1
	Total	tHP	540	550	600	tCLK	
Vertical	Display Period	tVV	2160	2160	2160	Lines	
	Blank	tVB	40	90	600	Lines	1
	Total	tVP	2200	2250	2760	Lines	

ITEM		Symbol	Min	Typ	Max	Unit	Note
Frequency	DCLK	fCLK	67	74.25	78.00	MHz	594/8
	Horizontal	fH	121.8	135	140	KHz	2
	Vertical	fV	50	60	63	Hz	2

Notes

1. The input of HSYNC & VSYNC signal does not have an effect on normal operation (DE Only Mode).
If you use spread spectrum of EMI, add some additional clock to minimum value for clock margin.
2. The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rate and the horizontal frequency
3. Spread Spectrum Rate (SSR) is limited to $\pm 0.5\%$ center spread at 30KHz

※ Timing should be set based on clock frequency.

Product specification

3-4. Color input data reference

The brightness of each primary color(red,green,blue) is based on the 10-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.


Table 6. Color data reference

Packer input & Unpacker output		30bpp RGB (10bit)	24bpp RGB (8bit)
Byte0	D[0]	R[2]	R[0]
	D[1]	R[3]	R[1]
	D[2]	R[4]	R[2]
	D[3]	R[5]	R[3]
	D[4]	R[6]	R[4]
	D[5]	R[7]	R[5]
	D[6]	R[8]	R[6]
	D[7]	R[9]	R[7]
Byte1	D[8]	G[2]	G[0]
	D[9]	G[3]	G[1]
	D[10]	G[4]	G[2]
	D[11]	G[5]	G[3]
	D[12]	G[6]	G[4]
	D[13]	G[7]	G[5]
	D[14]	G[8]	G[6]
	D[15]	G[9]	G[7]
Byte2	D[16]	B[2]	B[0]
	D[17]	B[3]	B[1]
	D[18]	B[4]	B[2]
	D[19]	B[5]	B[3]
	D[20]	B[6]	B[4]
	D[21]	B[7]	B[5]
	D[22]	B[8]	B[6]
	D[23]	B[9]	B[7]
Byte3	D[24]	Don't care	
	D[25]	Don't care	
	D[26]	B[0]	
	D[27]	B[1]	
	D[28]	G[0]	
	D[29]	G[1]	
	D[30]	R[0]	
	D[31]	R[1]	

Notes 1. 30bpp RGB (10bit) is 4 byte mode, otherwise (24bpp RGB) 3byte mode

Product specification


3-5. Power sequence

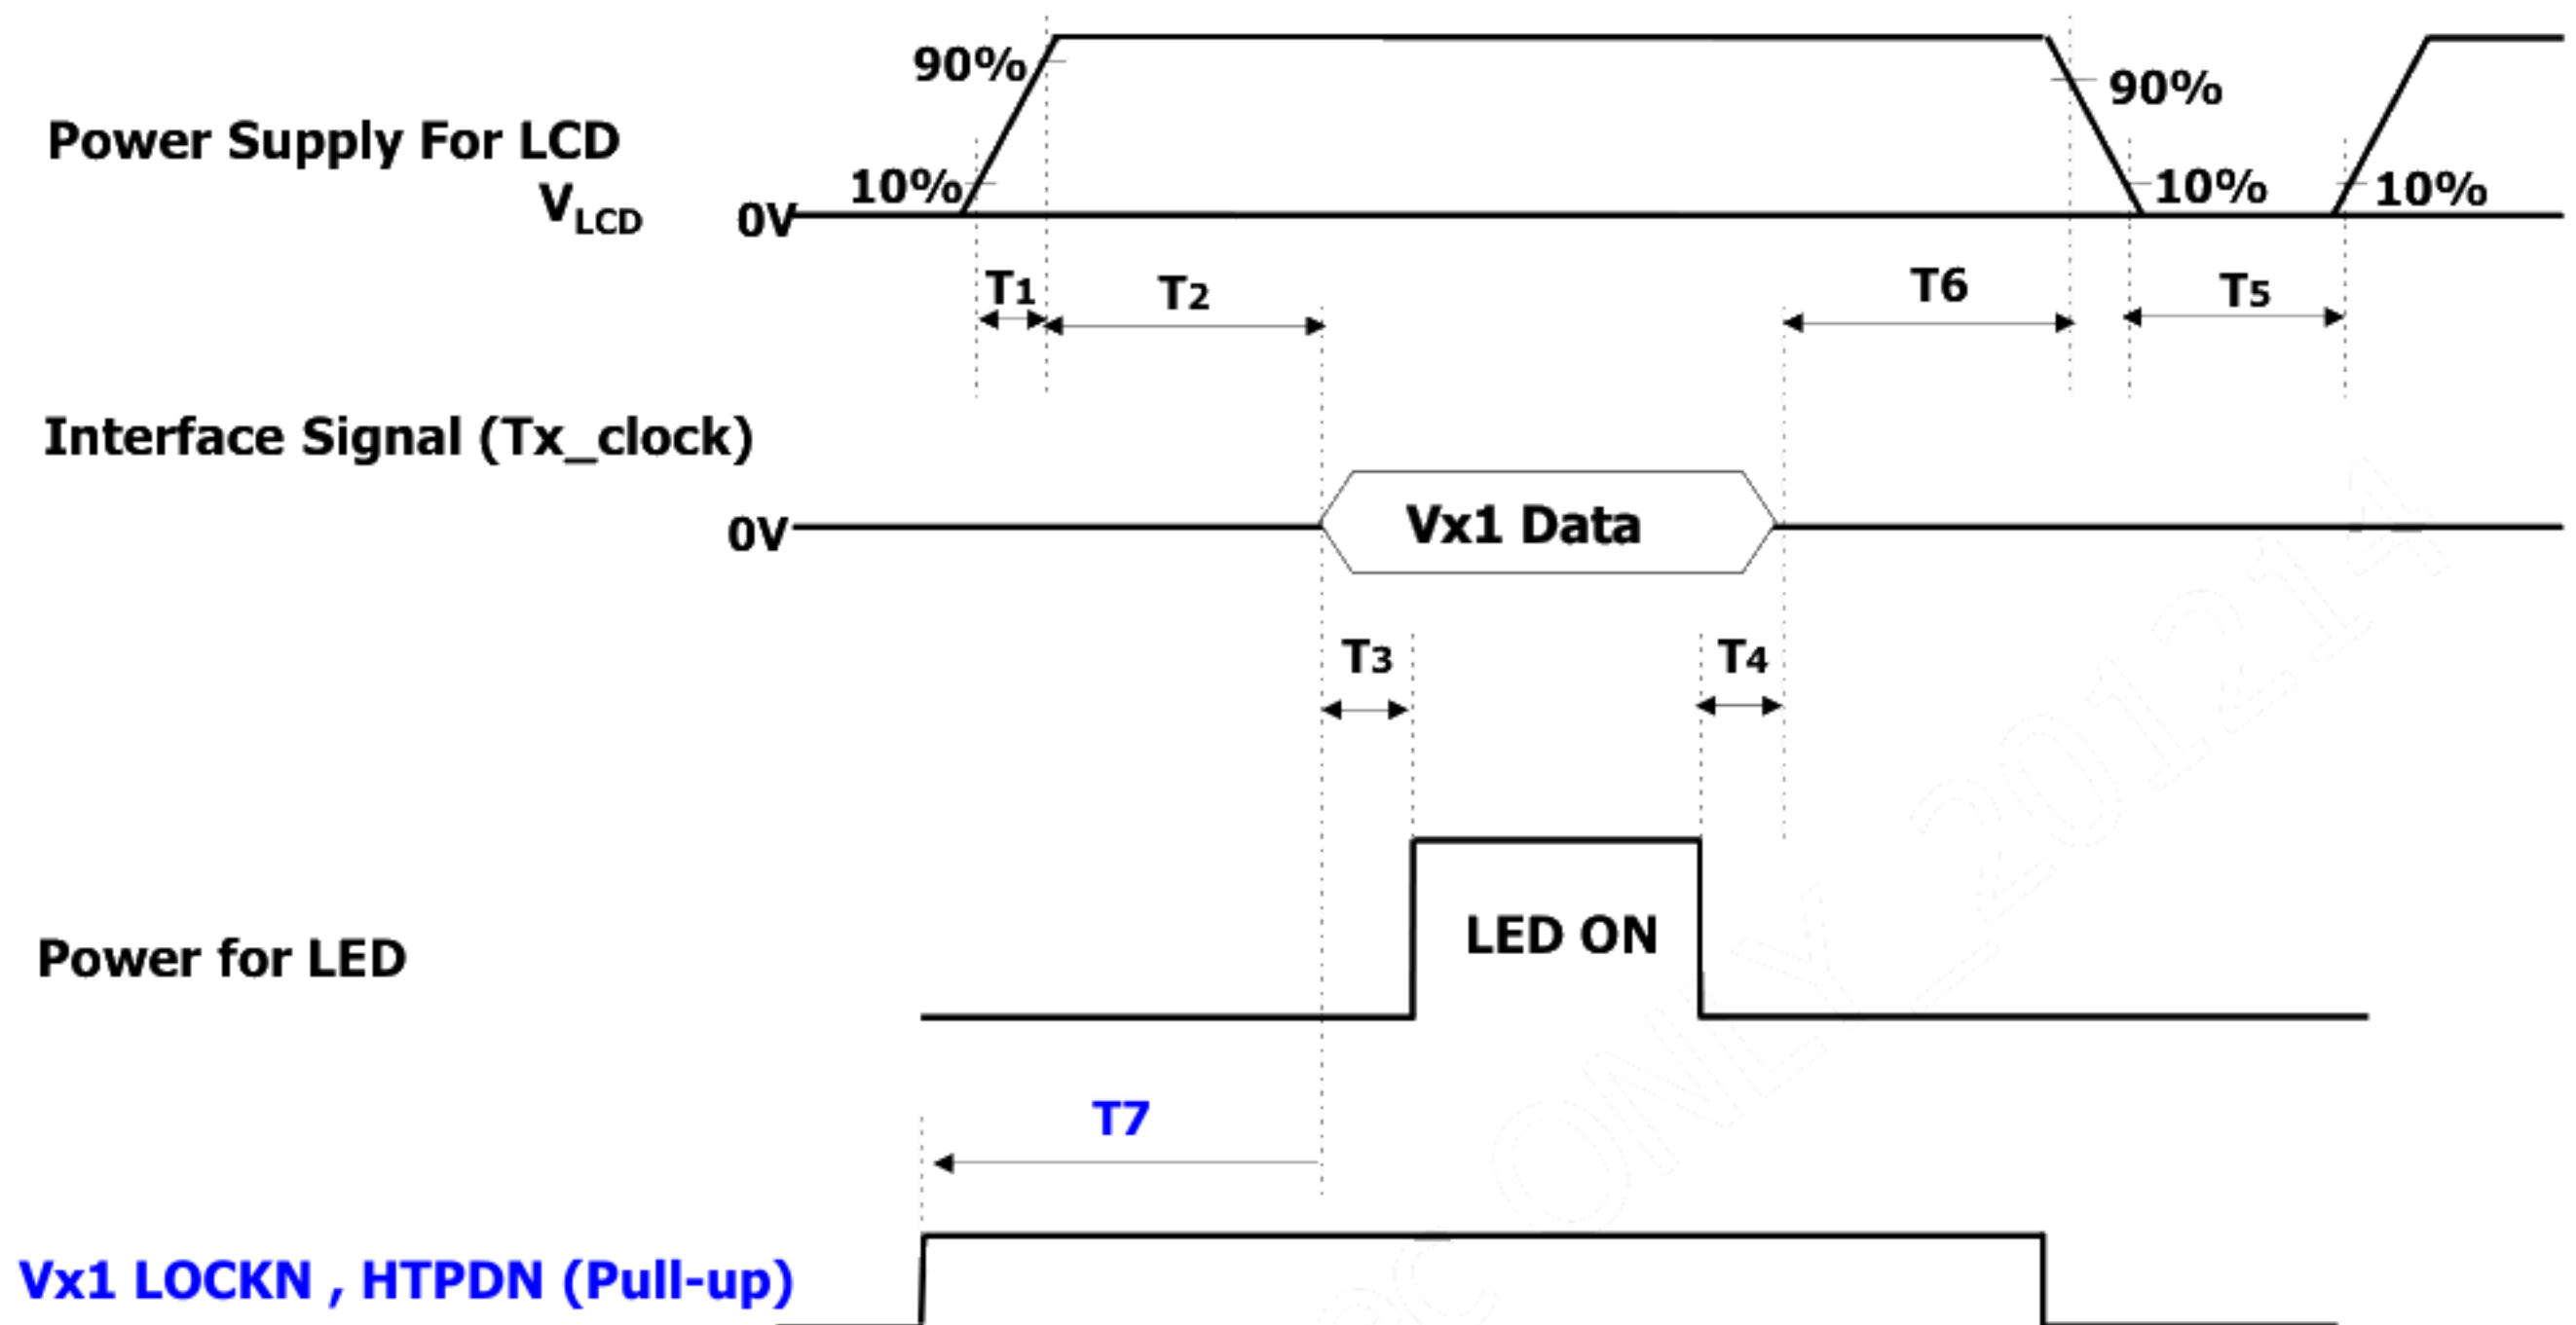

Parameter	Value			Unit	Note
	Min	Typ	Max		
T1	0.5	-	20	ms	1
T2	5	-	-	ms	2
T3	400	-	-	ms	3
T4	100	-	-	ms	3
T5	1000	-	-	ms	4
T6	0	-	-	ms	5
T7	0	-	-	ms	

- Note :
1. Even though T1 is over the specified value, there is no problem if I2T spec of fuse is satisfied.
 2. If T2 is satisfied with specification after removing V by one Cable, there is no problem.
 3. The T3 / T4 is recommended value, the case when failed to meet a minimum specification, abnormal display would be shown. There is no reliability problem.
 4. T5 should be measured after the Module has been fully discharged between power off and on period.
 5. It is recommendation specification that T6 has to be 0ms as a minimum value.
- ※ Please avoid floating state of interface signal at invalid period.
 ※ When the power supply for LCD (V_{LCD}) is off, be sure to pull down the valid and invalid data to 0V.

3-6. V_{LCD} Power dip condition

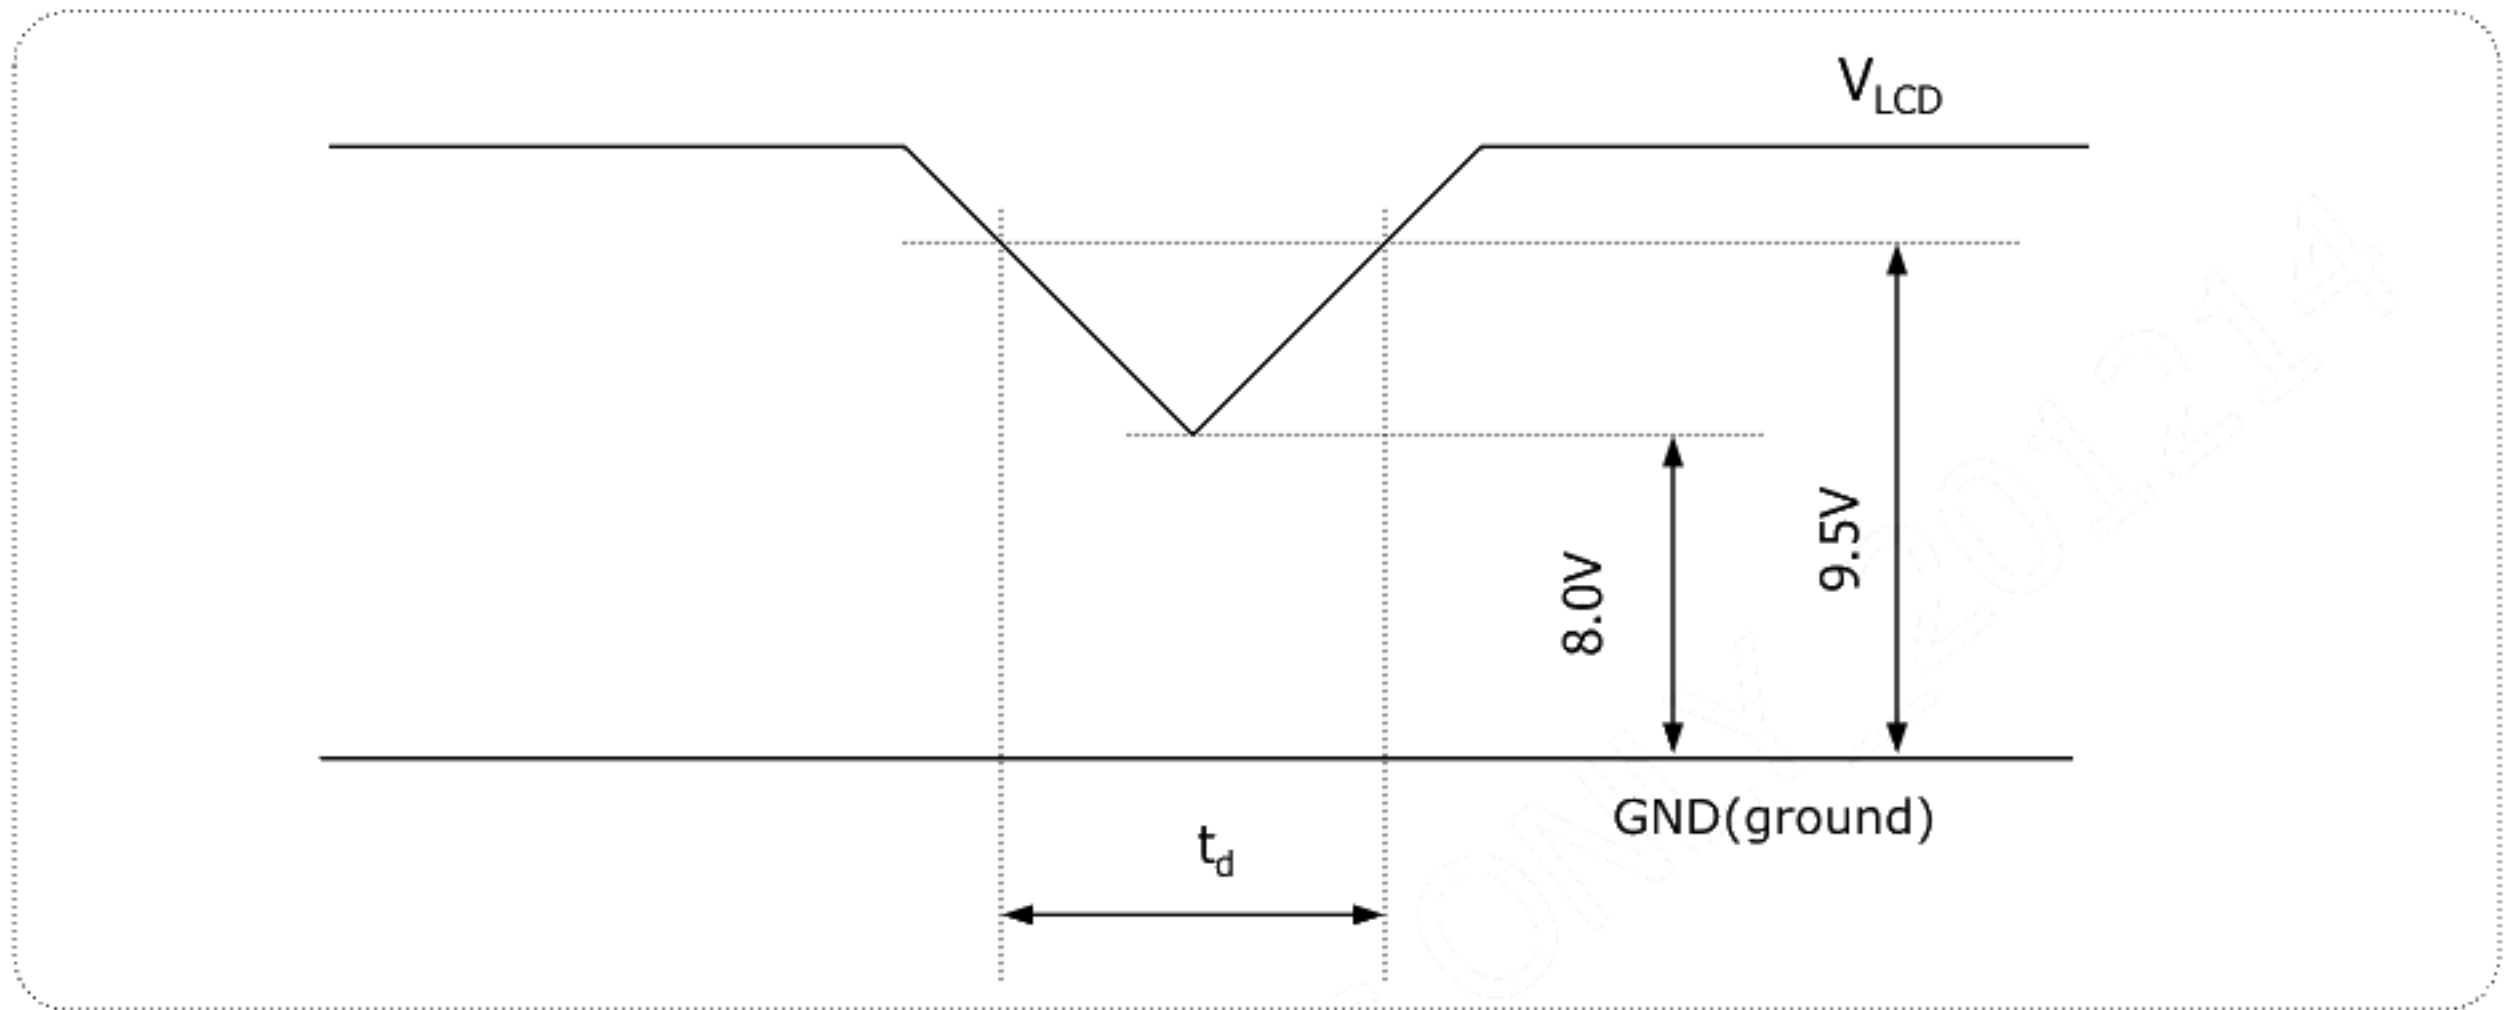

[FIG. 6] Power dip condition

For proper operation, stable power supply of V_{LCD} is necessary and power dip is allowed only in below condition. Except this condition, power on/off should follow power sequence specification in previous page exactly.

1) Dip condition


$$8.0V \leq V_{LCD} < 9.5V, \quad t_d \leq 20ms$$

Product specification

4. Optical specifications

Optical characteristics are determined after the unit has been 'ON' for approximately 30 minutes in a dark environment at $25 \pm 2^\circ\text{C}$. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0° and aperture 1 degree.

FIG. 7 presents additional information concerning the measurement equipment and method.

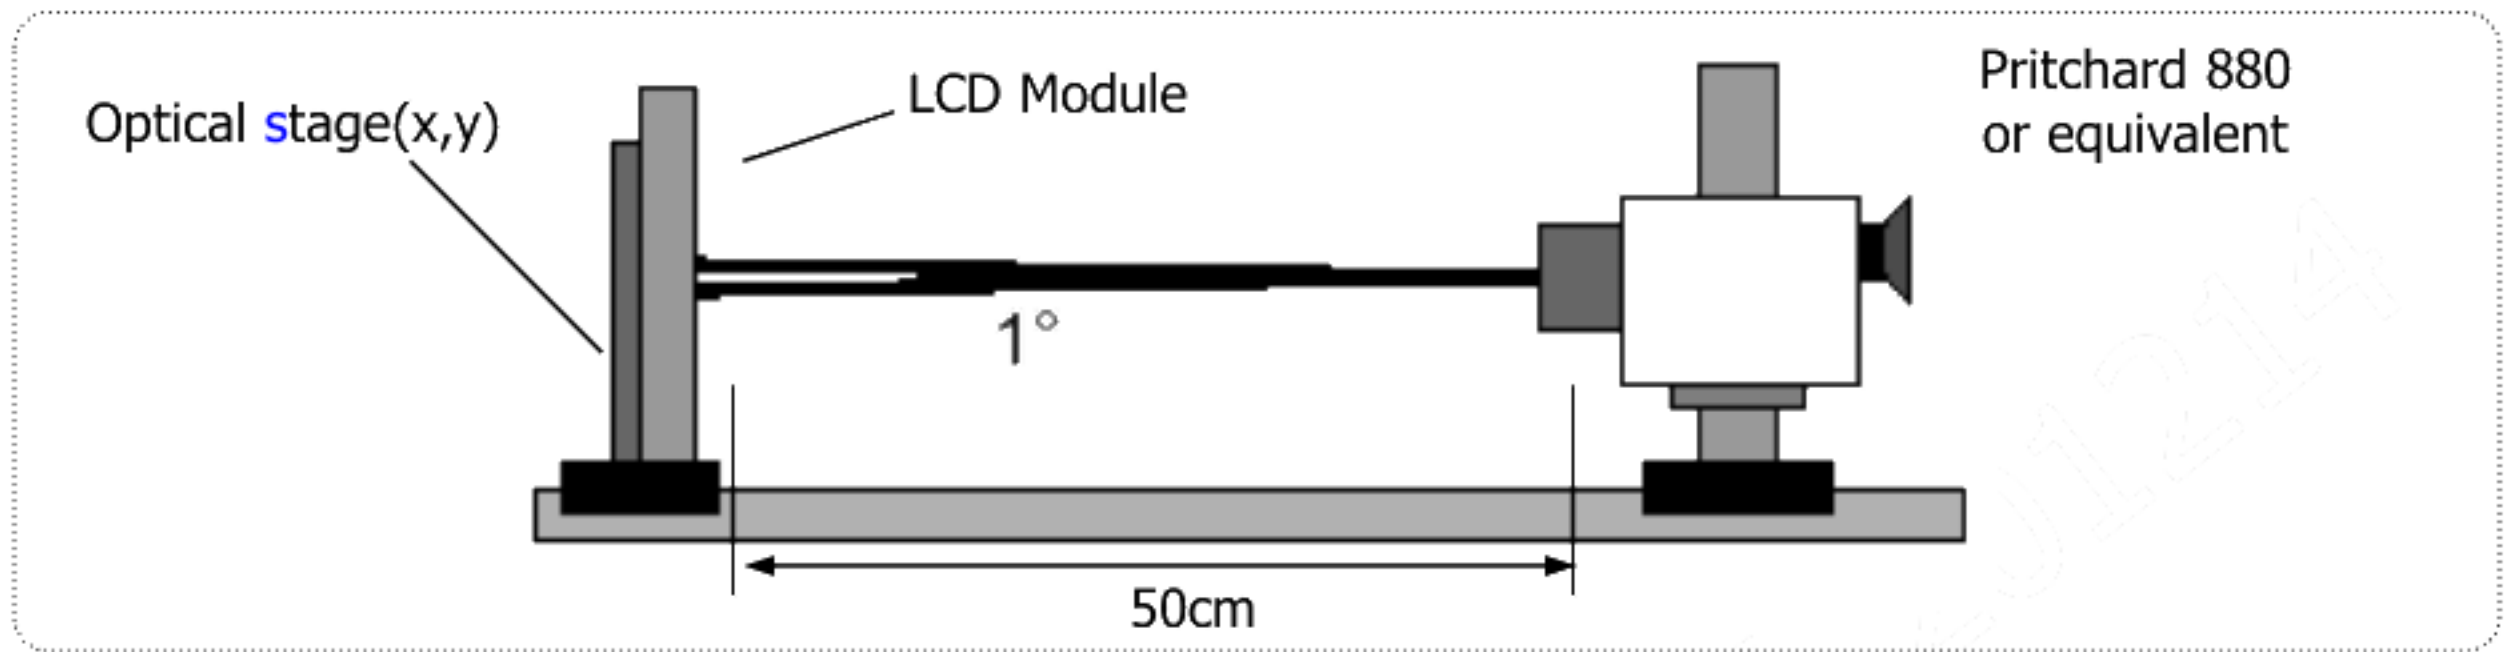

[FIG. 7] Optical characteristic measurement equipment and method

Table 8. Optical characteristics

($T_a = 25^\circ\text{C}$, $V_{\text{LCD}} = 10.0\text{V}$, $f_v = 60\text{Hz}$, $D_{\text{clk}} = 74.25\text{MHz}$, $I_s = 85\text{mA}$)

Parameter		Symbol	Values			Units	Notes
			Min.	Typ.	Max.		
Contrast Ratio		CR	910	1300	-		1
Surface luminance, white		L_{WH}	800	1000	-	cd/m^2	2
Luminance variation		δ_{WHITE}	75	-	-	%	3
Response time	Gray To Gray	$T_{\text{GTG_AVR}}$	-	14	25	ms	4
Color gamut (CIE1931)		sRGB	95		-	%	
Color coordinates [CIE1931] (By PR650)	Red	Rx		0.660			
		Ry		0.327			
	Green	Gx		0.295			
		Gy	Typ. -0.03	0.645	Typ. +0.03		
	Blue	Bx		0.150			
		By		0.060			
	White	Wx		0.313			
		Wy		0.329			
Color temperature		-	-	6500	-	K	
Viewing angle (CR>10, General)	Horizontal	θ_H	170	178	-	Degree	5
	Vertical	θ_V	170	178	-		
Gray Scale		-		2.2			6

Product specification

Notes :

1. Contrast Ratio(CR) is defined mathematically as : **(By PR880)**

$$\text{Contrast Ratio} = \frac{\text{Surface luminance with all white pixels}}{\text{Surface luminance with all black pixels}}$$

It is measured at center point(Location P1)


2. Surface luminance(L_{WH}) is luminance value at Center 1 point(P1) across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG.7 **(By PR880)**

3. The variation in surface luminance , δ WHITE is defined as : **(By PR880)**


$$\delta_{WHITE} = \frac{\text{Minimum}(L_{P1}, L_{P2}, \dots, L_{P9})}{\text{Maximum}(L_{P1}, L_{P2}, \dots, L_{P9})} \times 100$$

Where L1 to L9 are the luminance with all pixels displaying white at 9 locations.
For more information see FIG.8

<Measuring point for luminance variation>

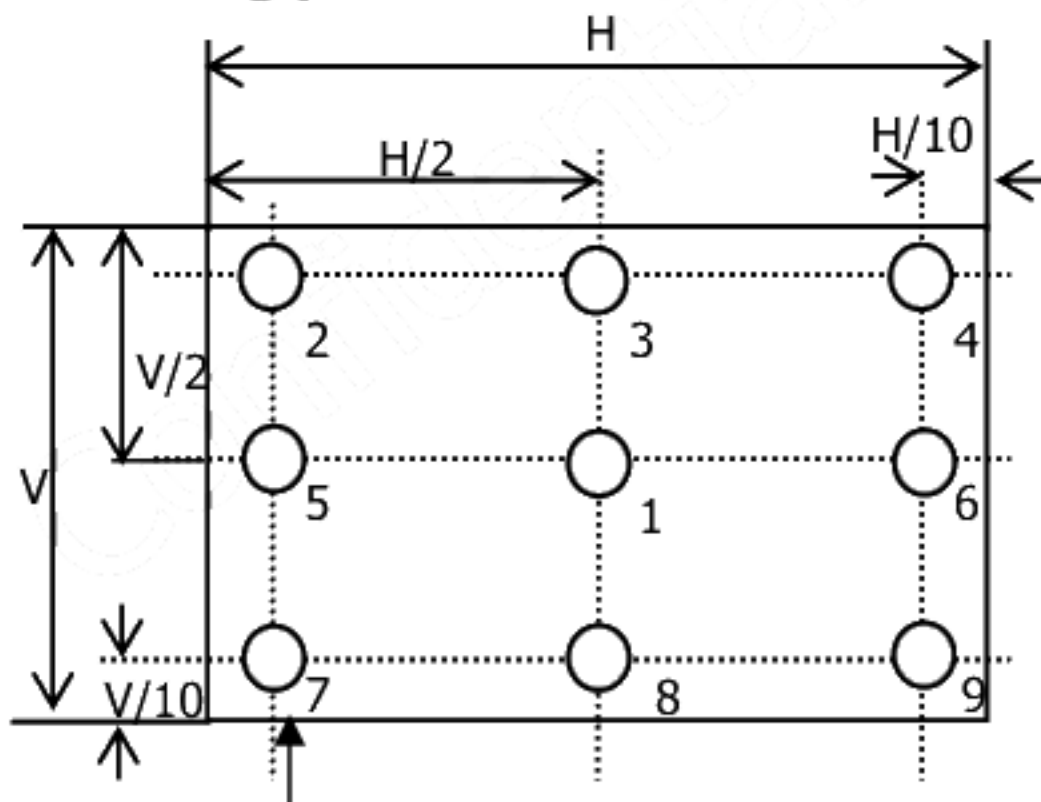

<Measuring point for surface luminance>

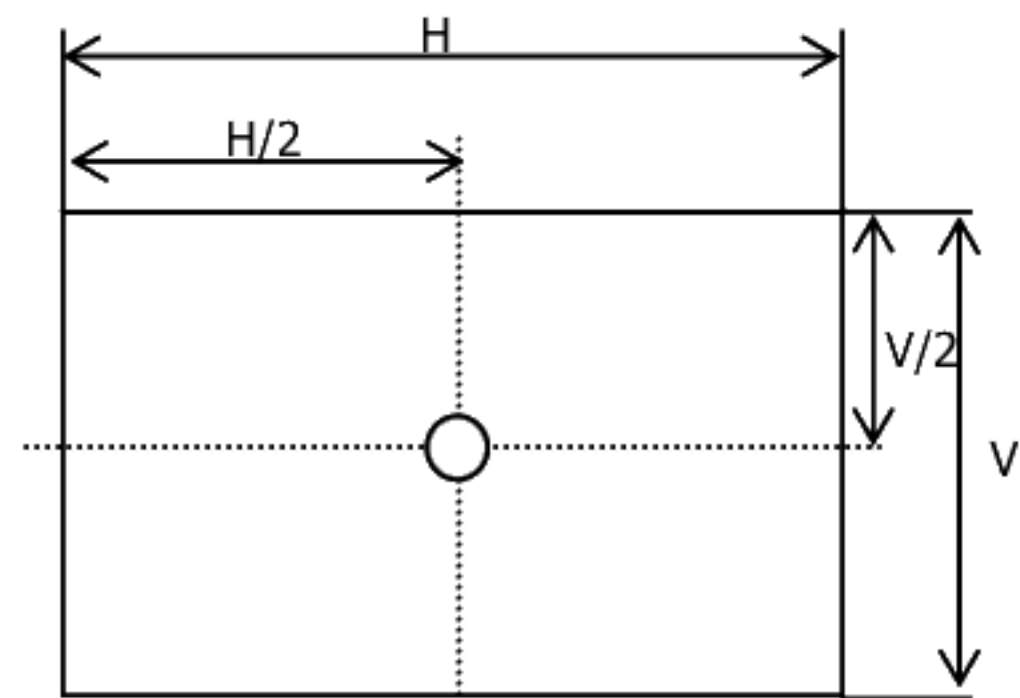

Active Area

H : 697.31 mm
V : 392.23 mm
@ H,V : Active Area

[FIG.8] Measure point for luminance

Product specification


4. The Gray To Gray response time is defined as the following figure and shall be measured by switching the input signal for "Gray To Gray".

- Gray step : 5 Step
- TGTG_AVR is the total average time at rising time and falling time for "Gray To Gray".
- By RD80S

Table 9. GTG Gray table

Gray To Gray		Rising time				
		G1023	G767	G511	G255	G0
Falling time	G1023					
	G767					
	G511					
	G255					
	G0					


Response time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Gray(M)".

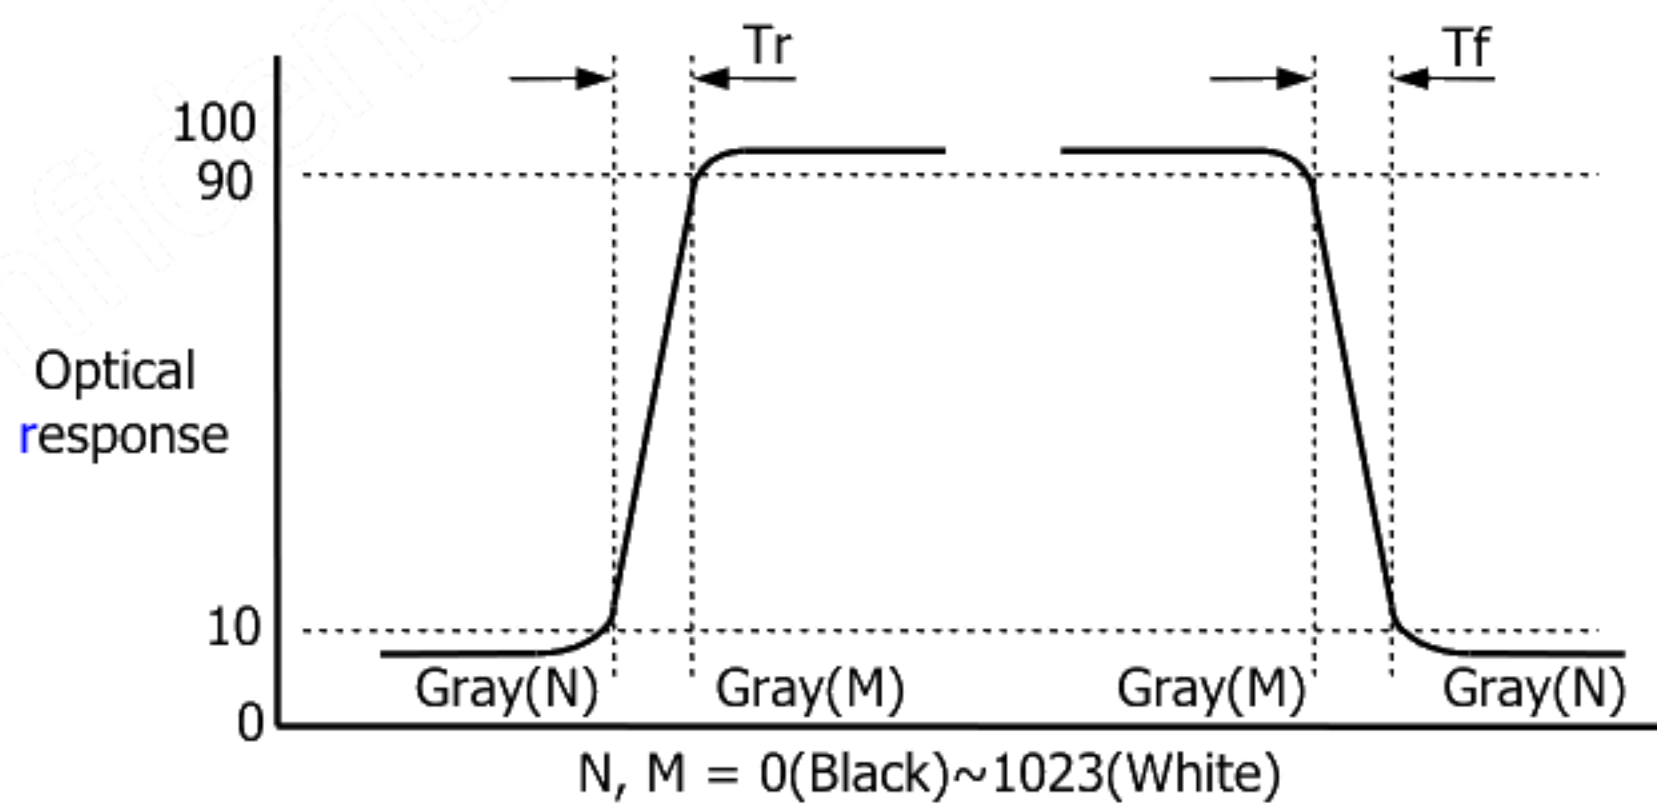

[FIG. 9] Response Time

Product specification

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG.10 **(By PR880)**

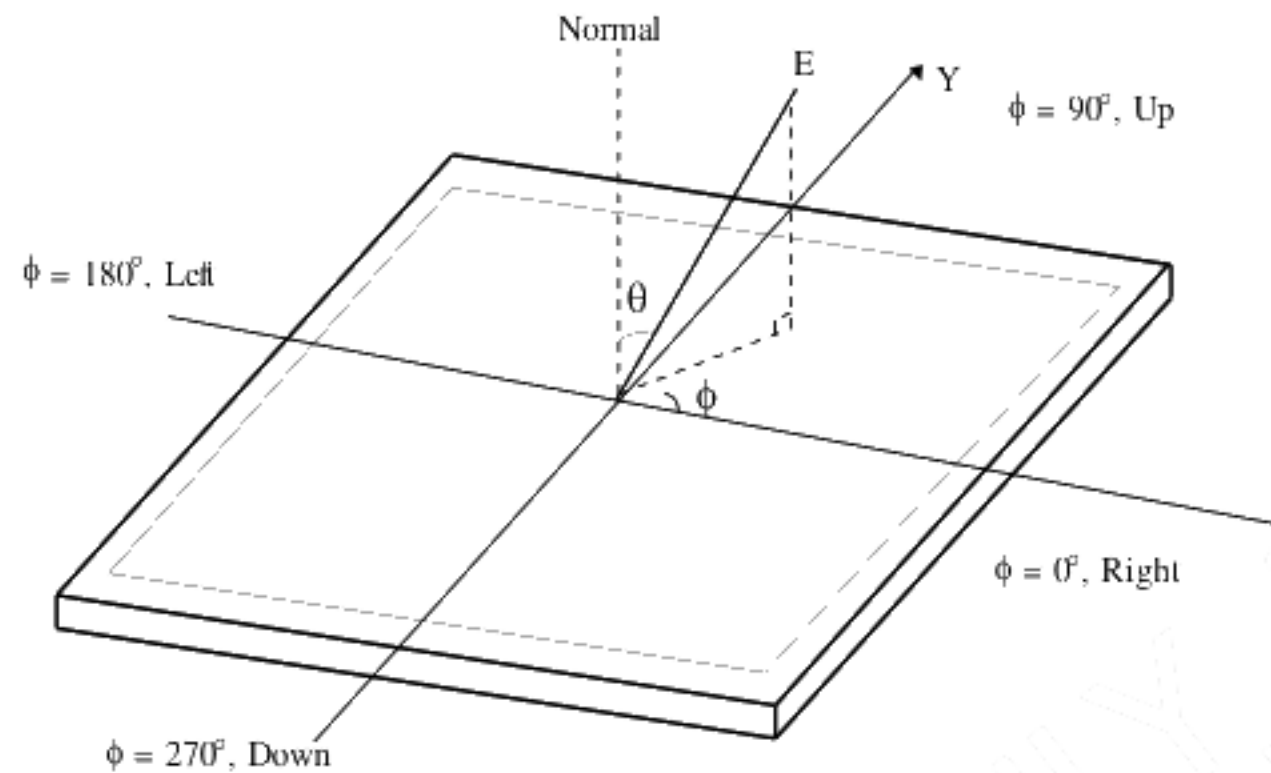

[FIG. 10] Viewing angle

6. Gamma Value is approximately 2.2. For more information see Table 11.

Table 10. Gray Scale Specification

Gray Level	Relative Luminance [%] (Typ.)
0	0.11
127	1.08
255	4.72
383	11.49
511	21.66
639	35.45
767	53.00
895	74.48
1023	100

Product specification

5. Mechanical characteristics

The contents provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD.


Outline dimension	Horizontal	730.7 mm
	Vertical	425.2 mm
	Depth	23.0 mm
Bezel area	Horizontal	702.3mm
	Vertical	397.2mm
Active display area	Horizontal	697.31 mm
	Vertical	392.23 mm
Weight	Typ. : 6,000g, Max. : 6,300g	
Surface treatment	Hard coating(3H) Anti-glare treatment of the front polarizer	

Notes : Please refer to a mechanic drawing in terms of tolerance at the next page.

Outline dimensions (horizontal, vertical and outside depth) are measured by using vernier calipers.
The inside depth dimensions are measured by using height gauge, when LCM is put face down onto a flat surface.

Product specification


<FRONT VIEW>

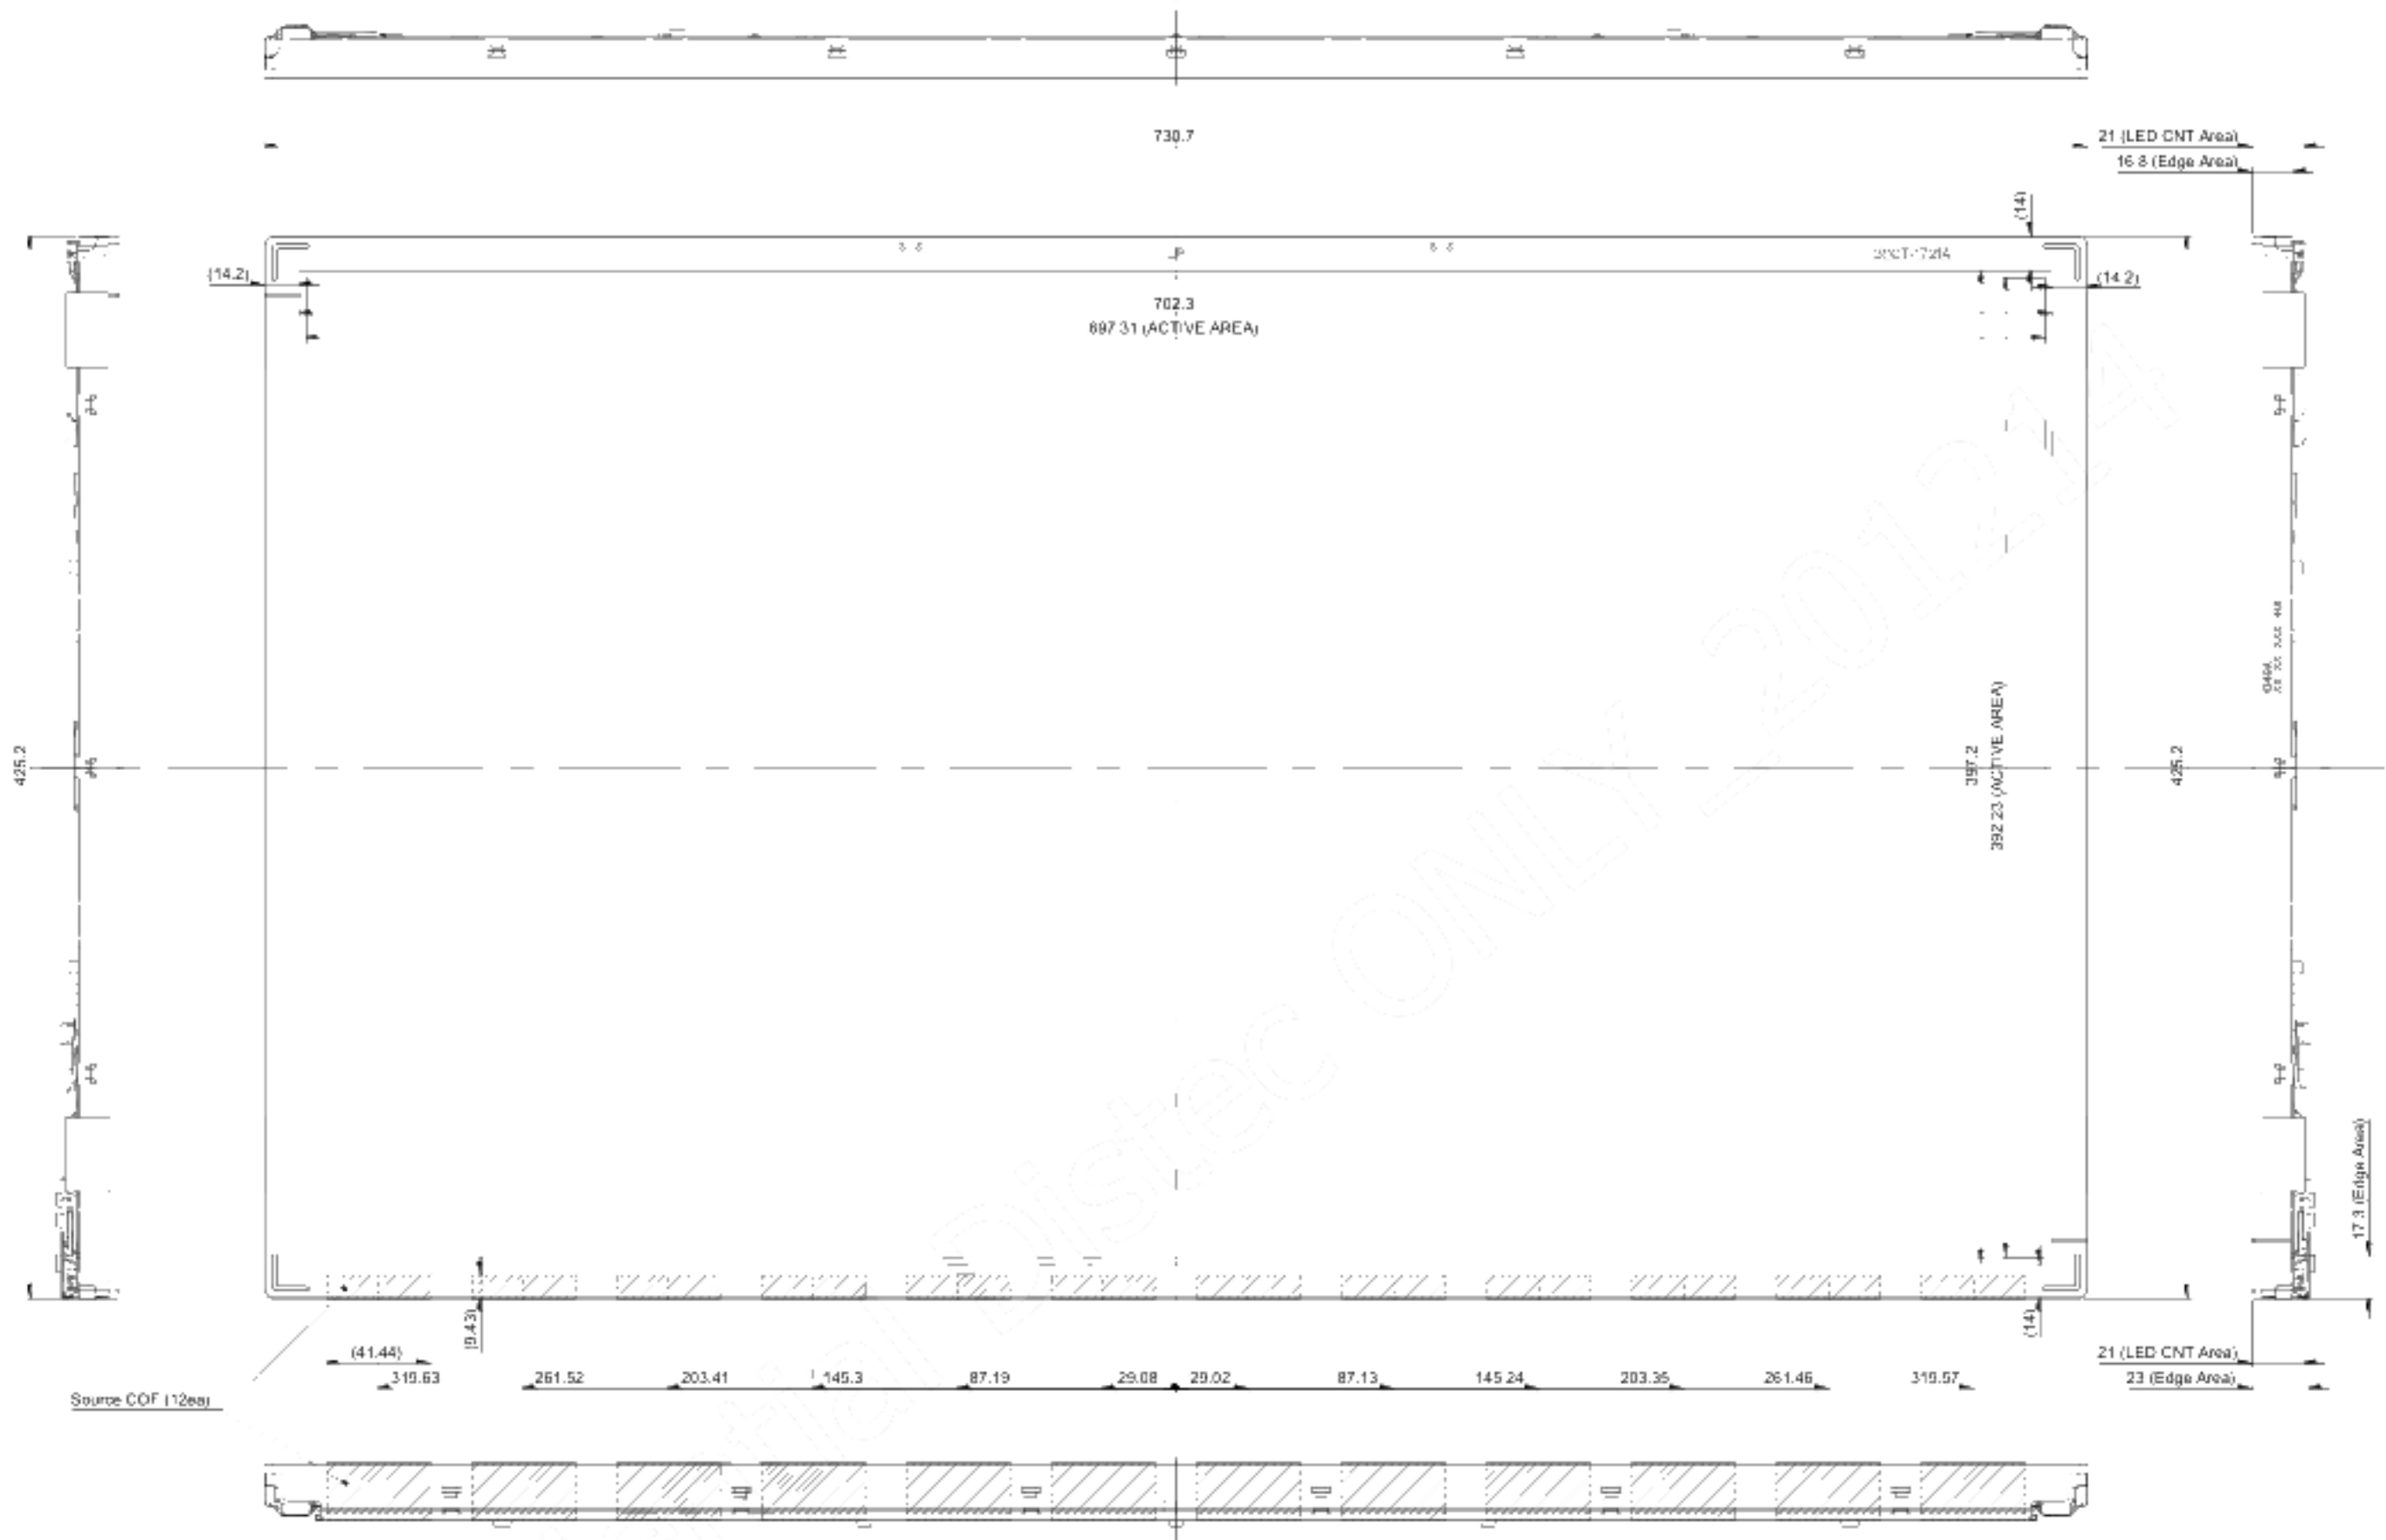

Product specification

<REAR VIEW>


* Reverse Panel

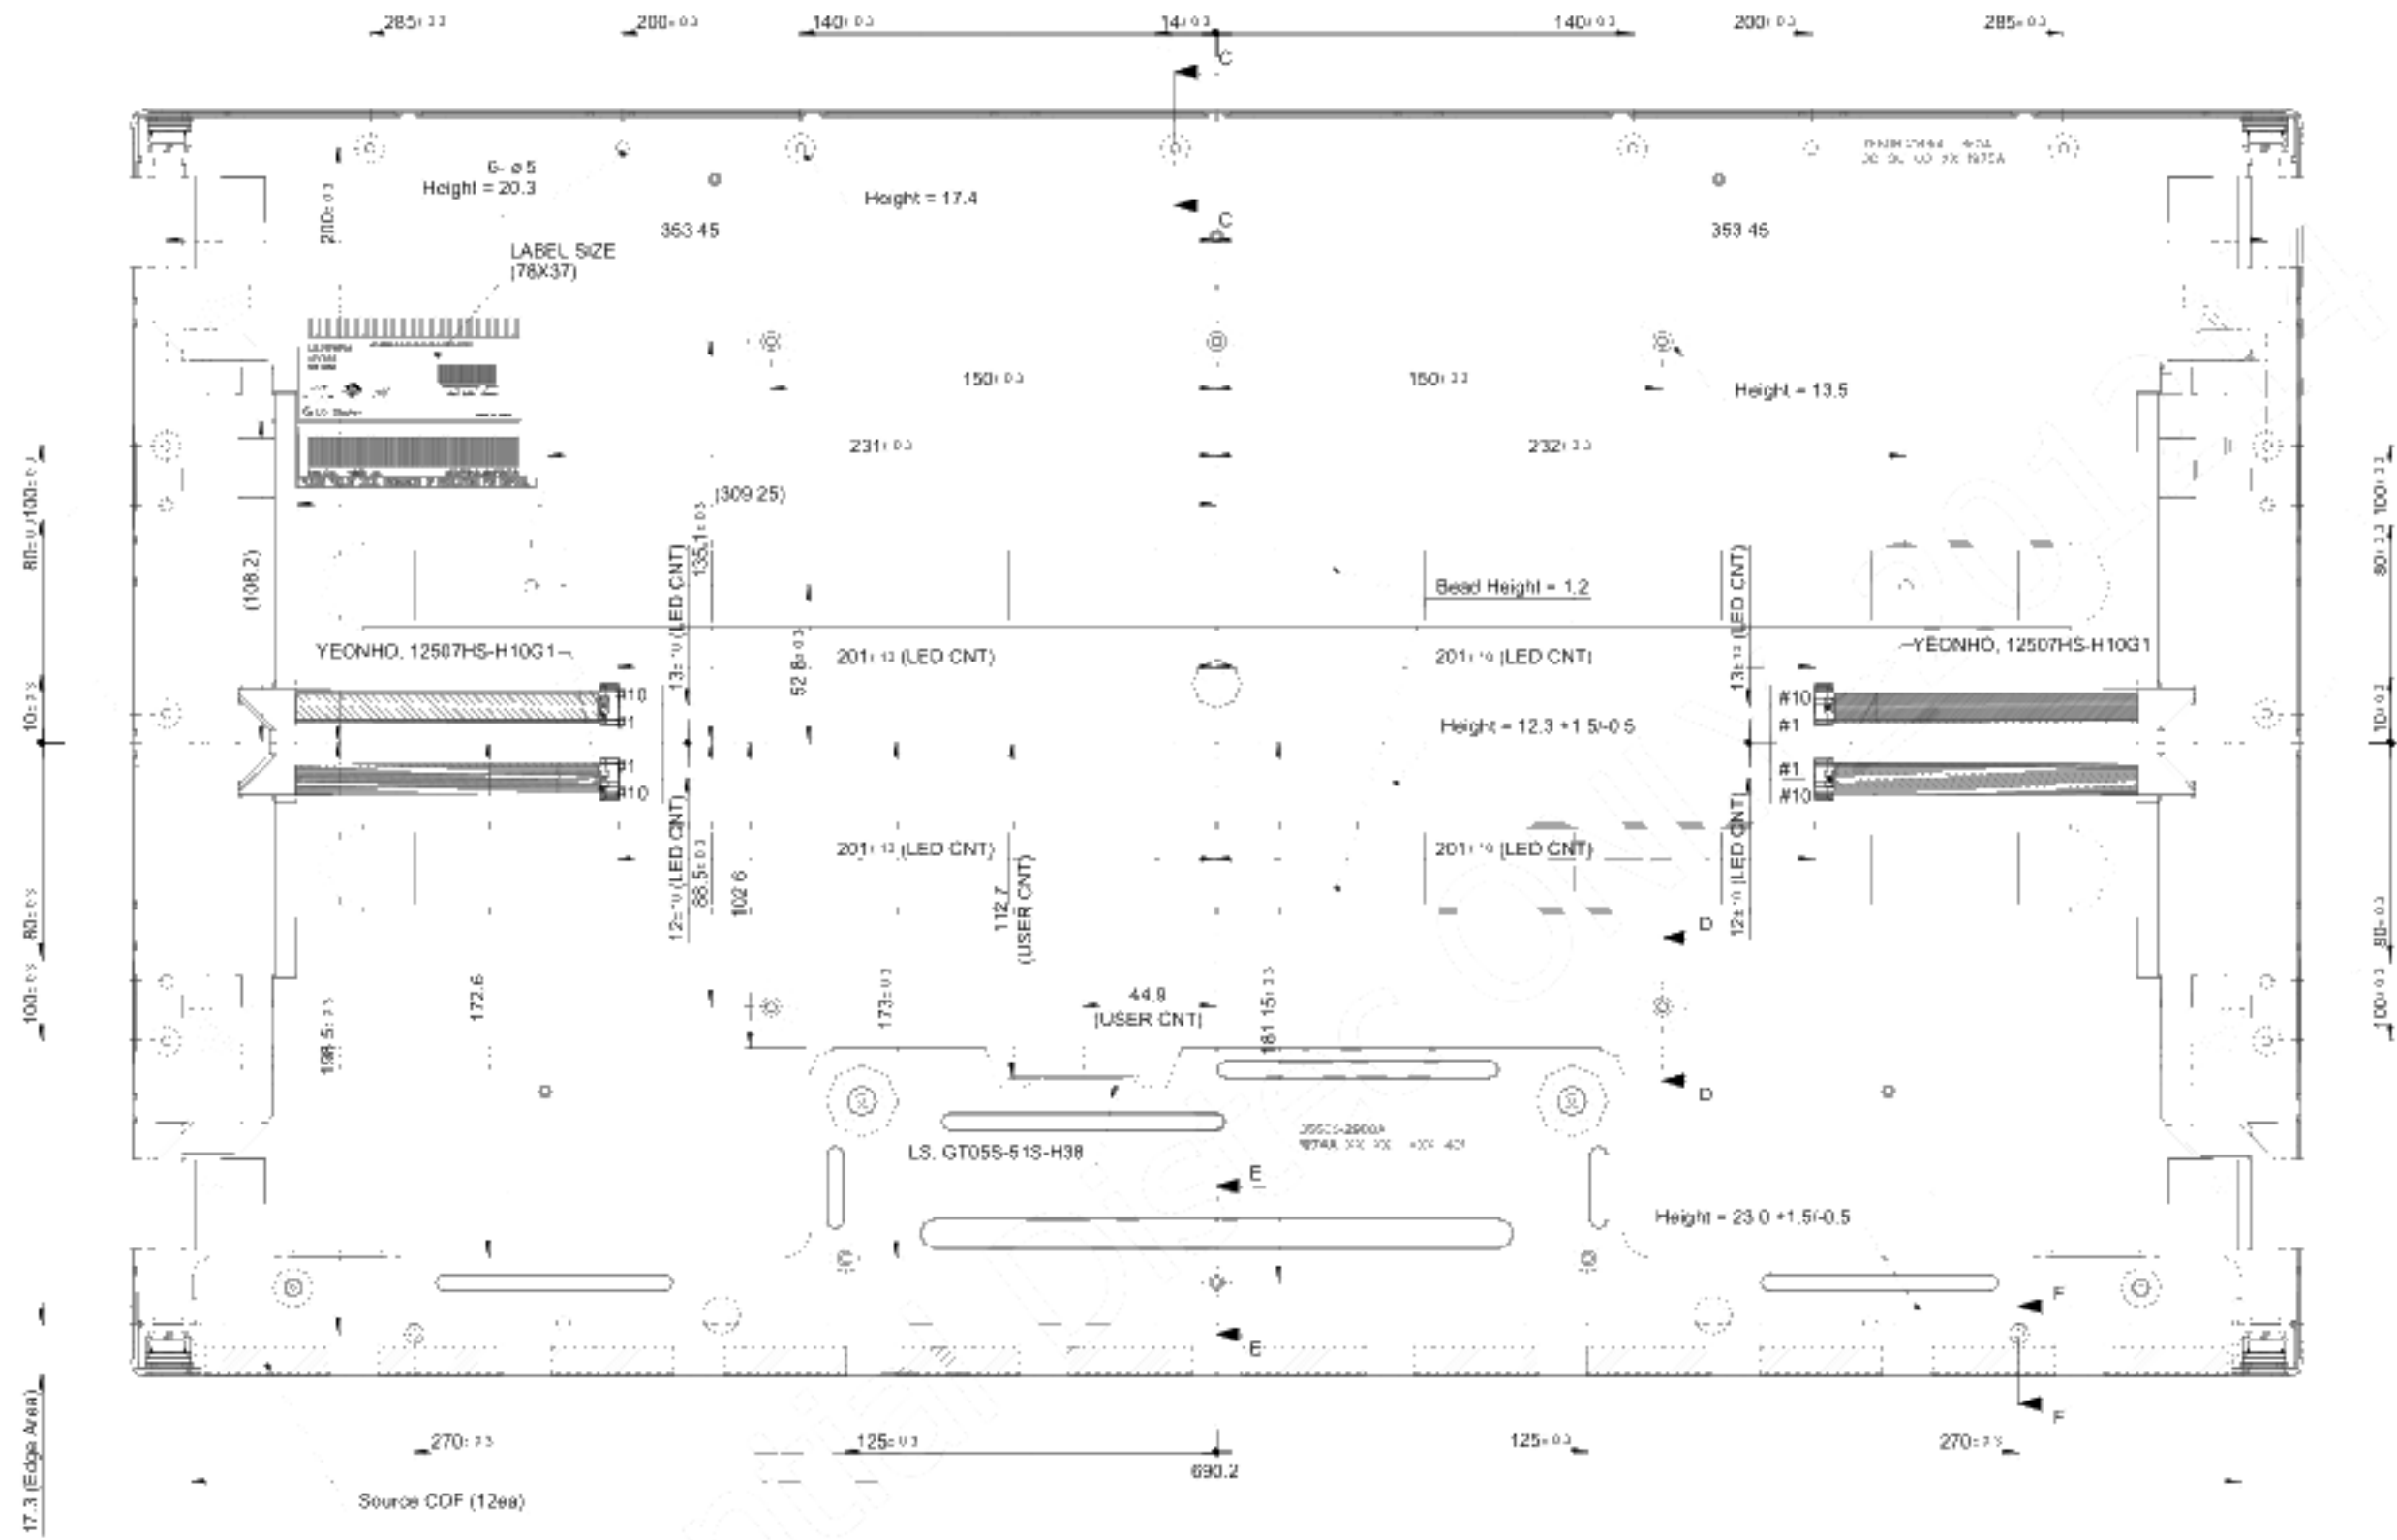


Notes

1. Unspecified tolerances are to be $\pm 0.5\text{mm}$.
2. Tilt and panel disposition tolerance of display area are as following


- (1) Y-direction: $|A-B| < 1.4\text{mm}$
- (2) X-direction: $|C-D| < 1.4\text{mm}$

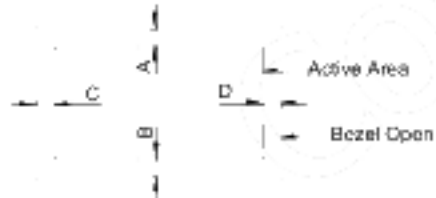


3. Torque SPEC of Mounting : 3.0~4.0kgf.cm, M3.0 Machine Screw
4. IF Connector Specification : LS, GT055-51S-H38
5. LED Connector Specification : YEONHO, 12507HS-H10G1
6. The CDF area is weak & sensitive, so please don't press the CDF area
7. The LCM warp(warpage) is less than 1.0 on the surface plate
8. Undefined height should follow the 3D Modeling data

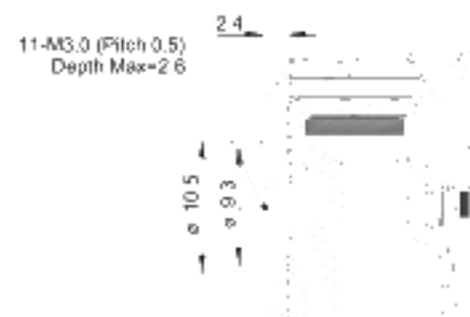


SECTION C-C
SCALE 2/1

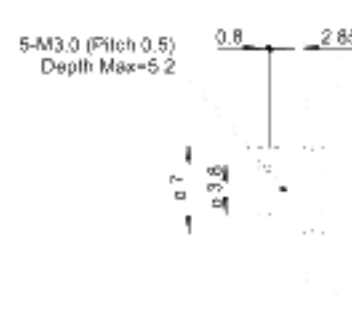

SECTION D-D
SCALE 2/1

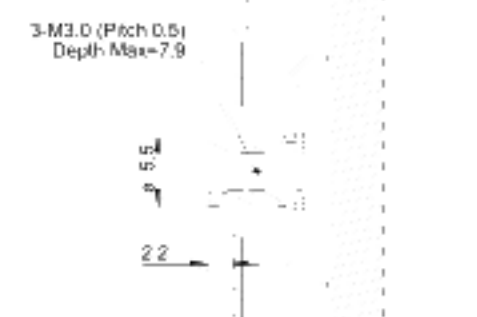

SECTION E-E
SCALE 2/1

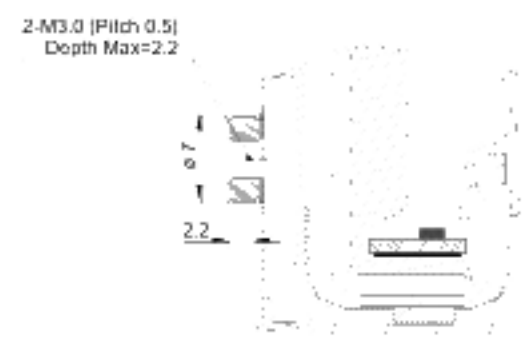

SECTION F-F
SCALE 2/1

Product specification

6. Reliability

Environment test condition

No	Test Item	Condition	Notes
1	High temperature storage test	$T_a = 60^{\circ}\text{C}$, 240h	1
2	Low temperature storage test	$T_a = -20^{\circ}\text{C}$, 240h	1
3	High temperature operation test	$T_a = 50^{\circ}\text{C}$, 50%RH, 240h	1
4	Low temperature operation test	$T_a = 0^{\circ}\text{C}$, 240h	1
5	Humidity condition operation	$T_a = 40^{\circ}\text{C}$, 90%RH	1
6	Vibration test (non-operating)	Wave form : Random Vibration level : 1.0G RMS Bandwidth : 10-300Hz Duration : X,Y,Z, 10min One time each direction	
7	Shock test (non-operating)	Shock level : 100G RMS Waveform : Half sine wave, 2ms Direction : $\pm X$, $\pm Y$, $\pm Z$ One time each direction	
8	Altitude Operating Storage / Shipment	0 - 10,000 feet (3,048m) 0 - 40,000 feet (12,192m)	
9	Maximum storage humidity for 4 corner light leakage Mura.	Max 70%RH , $T_a = 40^{\circ}\text{C}$	

Note 1) Result Evaluation Criteria:

TFT-LCD panels test should take place after cooling enough at room temperature.

In the standard condition, there should be no particular problems that may affect the display function.

* T_a = Ambient Temperature

Product specification

7. International Standards

7-1. Safety

- a) IEC 62368-1, The International Electro-technical Commission(IEC).
Audio/video, Information and Communication Technology Equipment - Safety - Safety Requirements.
- b) EN 62368-1, European Committee for Electro-technical Standardization (CENELEC)
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- c) UL 62368-1, UL LLC.
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- d) CAN/CSA C22.2 No.62368-1, Canadian Standards Association (CSA).
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- e) IEC 60950-1, The International Electro technical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment

- a) RoHS, Commission Delegated Directive (EU) 2015/863 of 31 March 2015 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council

Product specification

8. Packing

8-1. Designation of lot mark

a) Lot mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)
E : MONTH

D : YEAR
F ~ M : SERIAL NO.

Note

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	A	B	C	D	E	F	G	H	J	K

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of lot mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

Product specification

8-2. Packing form

a) Package quantity in one packing : 10ea/Box


Package quantity in one Pallet : 20ea/Pallet

b) Packing Size : 814mm X 543mm X 509mm


C) Pallet Ass'y Size: 1140mmX870mmX682mn

* LCM Direction(insert to Bottom Packing) : COF Down


1.

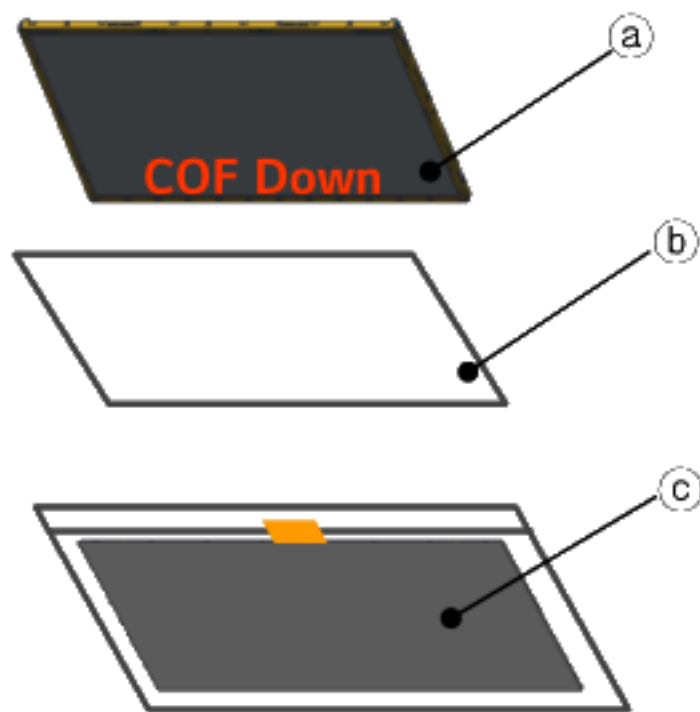

2.

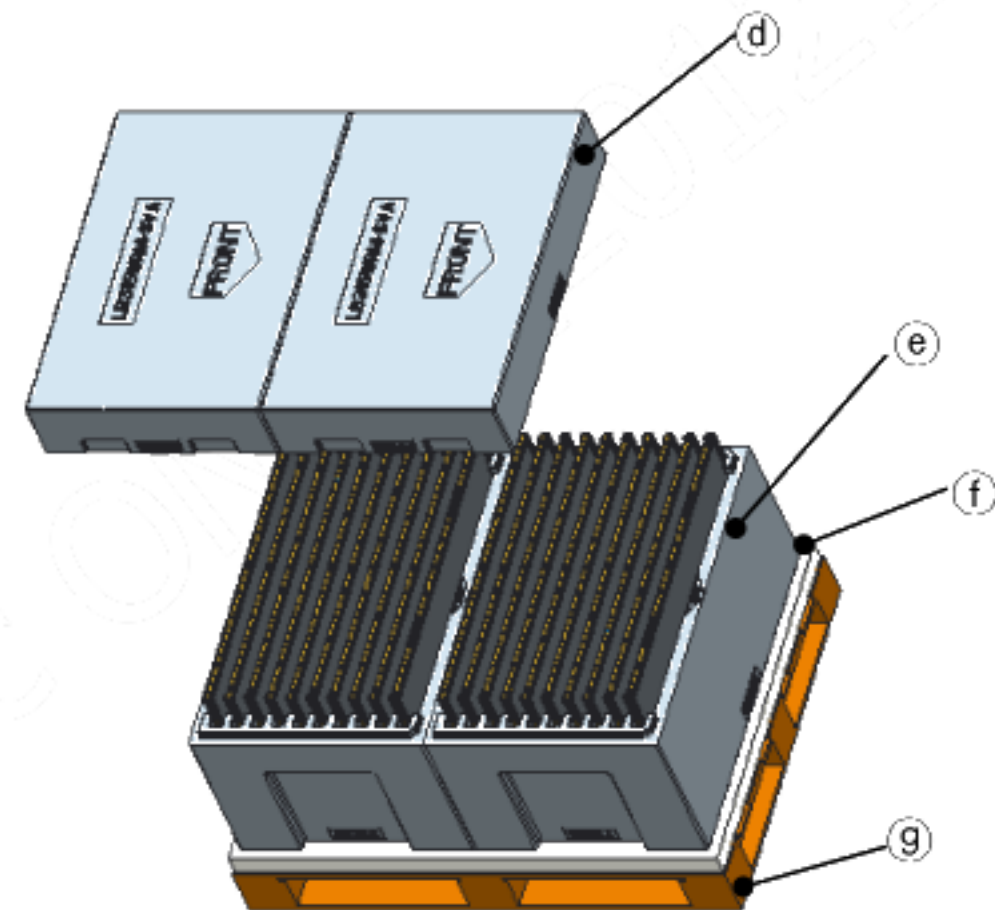

3.

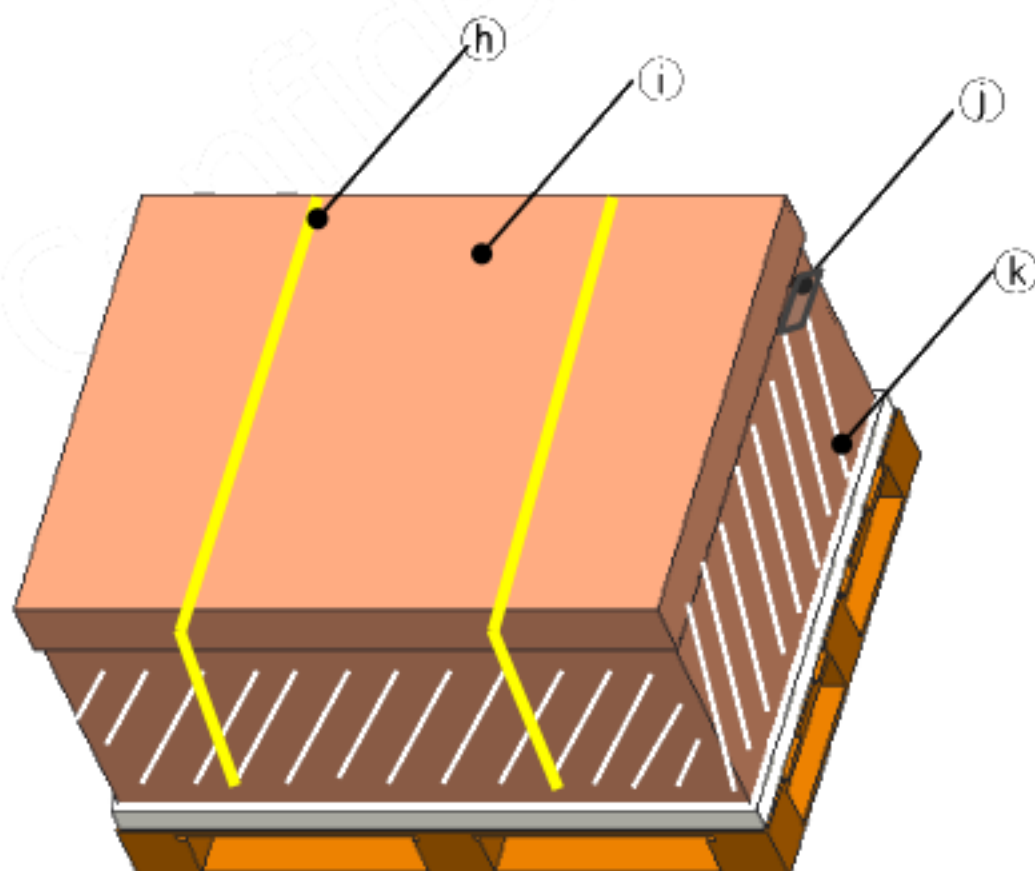

No.	Description	Material
(a)	LCM	-
(b)	Protect film	PP+PE
(c)	AL-Bag	AL
(d)	Packing,Top	EPS
(e)	Packing,Bottom	EPS
(f)	Cushion	EPE
(g)	Pallet	Plywood
(h)	BAND	PP
(i)	Angle Packing	Paper(SW)
(j)	LABEL	YUPO PAPER
(k)	Wrap	-

Product specification

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting precautions

- (1) You must mount a module using holes arranged in rear side.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. Operating precautions

- (1) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (2) Brightness depends on the temperature. (In higher temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- (7) A screw which is fastened up the steels should be a machine screw.
(If not, it causes metallic foreign material and deal LCM a fatal blow)
- (8) Please do not set LCD on its edge.
- (9) When LCMs are used for public display, defects such as Yogore & image sticking can not be guaranteed.
- (10) LCM cannot support "Interlaced scan method"
- (11) When this reverse model is used as a forward-type model (PCB on top side), LGD can not guarantee any defects of LCM.
- (12) Please conduct image sticking test after 2-hour aging with Rolling pattern and normal temperature.
(25~40℃)

Product specification

9-3. Electrostatic discharge control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions for strong light and hazardous materials exposure

Strong light exposure causes degradation of polarizer and color filter.

The LCM should be avoided direct contact with Hazardous materials such as sulfur, acetic acid, chlorine, etc. These materials may cause chemical reaction such as sulfurization, corrosion, discoloration, etc.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. Handling precautions for protection film

- (1) The protection film is attached to the bezel with a small masking tape.
When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschingasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com