



(j) Preliminary Specifications

(v) Final Specifications

<b>Module</b>	27.0 Inch Color TFT-LCD
<b>Model Name</b>	G270ZAN01.4

<p><b>Customer</b> _____ <b>Date</b> _____</p> <p><b>Checked &amp; Approved by</b> _____ <b>Date</b> _____</p>	<p><b>Approved by</b> _____ <b>Date</b> _____</p> <p><i>Jason Pan</i> _____ 2020. 06. 04</p> <p><b>Prepared by</b> _____ <b>Date</b> _____</p> <p><i>HsinYin Lee</i> _____ 2020. 06. 04</p>
Customer's sign back page	General Display Business Division / AU Optronics corporation

## Contents

<b>1. Operating Precautions .....</b>	<b>4</b>
<b>2. General Description.....</b>	<b>5</b>
2.1 Display Characteristics.....	5
2.2 Optical Characteristics .....	6
<b>3. Functional Block Diagram.....</b>	<b>9</b>
<b>4. Absolute Maximum Ratings .....</b>	<b>10</b>
4.1 Absolute Ratings of TFT LCD Module.....	10
4.2 Absolute Ratings of Environment.....	10
<b>5. Electrical Characteristics .....</b>	<b>11</b>
5.1 TFT LCD Module .....	11
5.2 Backlight Unit.....	13
<b>6. Signal Characteristic .....</b>	<b>15</b>
6.1 Pixel Format Image.....	15
6.2 Scanning Direction.....	16
6.3 Signal Description .....	17
6.4 The Input Data Format.....	20
6.5 Interface Timing .....	22
6.6 Power ON/OFF Sequence .....	23
<b>7. Reliability Test Criteria .....</b>	<b>24</b>
<b>8. Mechanical Characteristics.....</b>	<b>25</b>
8.1 LCM Outline Dimension .....	25
<b>9. Label and Packaging .....</b>	<b>27</b>
9.1 Shipping Label (on the rear side of TFT-LCD display).....	27
9.2 Carton Package .....	27
<b>10 Safety .....</b>	<b>29</b>
10.1 Sharp Edge Requirements.....	29
10.2 Materials .....	29
10.3 Capacitors.....	29
10.4 National Test Lab Requirement.....	29

Record of Revision

Version	Date (yyyy/m/d)	Page	Old description	New Description																																																																
0.1	2018/08/20	All	first edition of preliminary spec																																																																	
0.2	2018/11/14	p.6-7	Uniformity spec & definition	Uniformity spec & definition																																																																
1.0	2020/06/04	P6	<p>Color / Chromaticity Coordinates (CIE 1931):</p> <table border="1"> <tr><td>Red x:</td><td>0.653</td><td>0.683</td><td>0.713</td></tr> <tr><td>Red y:</td><td>0.272</td><td>0.302</td><td>0.332</td></tr> <tr><td>Green x:</td><td>0.239</td><td>0.269</td><td>0.299</td></tr> <tr><td>Green y:</td><td>0.675</td><td>0.655</td><td>0.685</td></tr> <tr><td>Blue x:</td><td>0.119</td><td>0.149</td><td>0.179</td></tr> <tr><td>Blue y:</td><td>0.012</td><td>0.042</td><td>0.072</td></tr> <tr><td>White x:</td><td>0.283</td><td>0.313</td><td>0.343</td></tr> <tr><td>White y:</td><td>0.299</td><td>0.329</td><td>0.359</td></tr> </table>	Red x:	0.653	0.683	0.713	Red y:	0.272	0.302	0.332	Green x:	0.239	0.269	0.299	Green y:	0.675	0.655	0.685	Blue x:	0.119	0.149	0.179	Blue y:	0.012	0.042	0.072	White x:	0.283	0.313	0.343	White y:	0.299	0.329	0.359	<p>Color / Chromaticity Coordinates (CIE 1931):</p> <table border="1"> <tr><td>Red x:</td><td>0.644</td><td>0.674</td><td>0.704</td></tr> <tr><td>Red y:</td><td>0.282</td><td>0.312</td><td>0.342</td></tr> <tr><td>Green x:</td><td>0.237</td><td>0.267</td><td>0.297</td></tr> <tr><td>Green y:</td><td>0.631</td><td>0.661</td><td>0.691</td></tr> <tr><td>Blue x:</td><td>0.123</td><td>0.153</td><td>0.183</td></tr> <tr><td>Blue y:</td><td>0.018</td><td>0.048</td><td>0.078</td></tr> <tr><td>White x:</td><td>0.283</td><td>0.313</td><td>0.343</td></tr> <tr><td>White y:</td><td>0.299</td><td>0.329</td><td>0.359</td></tr> </table>	Red x:	0.644	0.674	0.704	Red y:	0.282	0.312	0.342	Green x:	0.237	0.267	0.297	Green y:	0.631	0.661	0.691	Blue x:	0.123	0.153	0.183	Blue y:	0.018	0.048	0.078	White x:	0.283	0.313	0.343	White y:	0.299	0.329	0.359
Red x:	0.653	0.683	0.713																																																																	
Red y:	0.272	0.302	0.332																																																																	
Green x:	0.239	0.269	0.299																																																																	
Green y:	0.675	0.655	0.685																																																																	
Blue x:	0.119	0.149	0.179																																																																	
Blue y:	0.012	0.042	0.072																																																																	
White x:	0.283	0.313	0.343																																																																	
White y:	0.299	0.329	0.359																																																																	
Red x:	0.644	0.674	0.704																																																																	
Red y:	0.282	0.312	0.342																																																																	
Green x:	0.237	0.267	0.297																																																																	
Green y:	0.631	0.661	0.691																																																																	
Blue x:	0.123	0.153	0.183																																																																	
Blue y:	0.018	0.048	0.078																																																																	
White x:	0.283	0.313	0.343																																																																	
White y:	0.299	0.329	0.359																																																																	
		P19																																																																		
		P24	Drop Test: Height: 60 cm, package test	Drop Test: Height: 45.7 cm, package test																																																																
		P28	<p>9.2 Carton Package</p> <ul style="list-style-type: none"> <li>Max capacity: 5 PCS TFT-LCD module per carton</li> <li>Max weight: 20 kg per carton</li> <li>Outside dimension of carton: 7.6mm(L) * 270mm(W) * 470mm(H)</li> <li>Pallet size: 1,200mm * 800mm * 1,100mm</li> <li>Box stacked: <ul style="list-style-type: none"> <li>Module by row_Max: (1*3) * 2 layers, one pallet put 6 boxes, total 18pcs module</li> <li>Module by row_Max: (1*3) * 2 layers * (1*3) * 2 layers, two pallet put 12 boxes, total 36pcs module</li> <li>Module by row_Max: (1*3) * 2 layers * (1*3) * 2 layers, two pallet put 12 boxes, total 36pcs module</li> </ul> </li> </ul>	<p>9.2 Carton Package</p> <ul style="list-style-type: none"> <li>Max capacity: 5 PCS TFT-LCD module per carton</li> <li>Max weight: 20 kg per carton</li> <li>Outside dimension of carton: 7.6mm(L) * 270mm(W) * 466mm(H)</li> <li>Pallet size: 1,200 mm * 800 mm * 1,100 mm</li> <li>Box stacked: <ul style="list-style-type: none"> <li>Module by row_Max: (1*3) * 2 layers, one pallet put 6 boxes, total 18pcs module</li> <li>Module by row_Max: (1*3) * 2 layers * (1*3) * 2 layers, two pallet put 12 boxes, total 36pcs module</li> <li>Module by row_Max: (1*3) * 2 layers * (1*3) * 2 layers, two pallet put 12 boxes, total 36pcs module</li> </ul> </li> </ul>																																																																

## 1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) To avoid ESD (Electro Static Discharge) damage, be sure to ground yourself before handling TFT-LCD Module.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
- 14) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.

## 2. General Description

This specification applies to the Color Active Matrix Liquid Crystal Display G270ZAN01.4 composed of a TFT-LCD display, a driver and power supply circuit, and a LED backlight system. The screen format is intended to support the UHD (3840(H) x 2160(V)) screen and 1.07B colors.

LED driving board for backlight unit is included. All input signals are 8 lanes eDP interface compatible.

### 2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	26.93" (684mm)
Active Area	[mm]	596.16 (H) x 335.34 (V)
Resolution		3840(x3) x 2160
Pixel Pitch	[mm]	0.15525 (per one triad) x 0.15525
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		AHVA mode, Normally Black
Nominal Input Voltage VDD	[Volt]	+12 (Typ)
Power Consumption	[Watt]	Total = 60.0W (Typ) (LCD =10.8W, BLU =49.2W)
Weight	[Grams]	3400 (Typ)
Physical Size	[mm]	630.0 (H) x 368.2 (V) x 22.9 (D) (Typ)
Electrical Interface		8-lanes eDP , 10bits RGB data input
Surface Treatment		Glare treatment
Support Color		1.07B colors (8bit+Hi FRC)
Temperature Range		
Operating	[°C]	0 to +50
Storage (Non-Operating)	[°C]	-20 to +60
RoHS Compliance		

## 2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C (Room Temperature):

Item	Unit	Conditions	Min.	Typ.	Max.	Note	
White Luminance	cd/m <sup>2</sup>	I <sub>LED</sub> =70mA(center point)	640	800	-	1	
Uniformity	%	9 points	75	80	-	2,3	
Contrast Ratio	--		700	1000	-	4	
Response Time	msec	Rising	-	-	-	5	
		Falling	-	-	-		
		Rising + Falling	-	16	25		
Viewing Angle	degree	Horizontal CR >= 10	(Right)	85	89	-	6
			(Left)	85	89	-	
		Vertical CR >= 10	(Upper)	85	89	-	
			(Lower)	85	89	-	
Color / Chromaticity Coordinates (CIE 1931)	--	Red x	0.644	0.674	0.704		
		Red y	0.282	0.312	0.342		
		Green x	0.237	0.267	0.297		
		Green y	0.631	0.661	0.691		
		Blue x	0.123	0.153	0.183		
		Blue y	0.016	0.046	0.076		
		White x	0.283	0.313	0.343		
		White y	0.299	0.329	0.359		


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR\_3 or equivalent)


Aperture 1° with 50cm viewing distance

Test Point Center

Environment < 1 lux

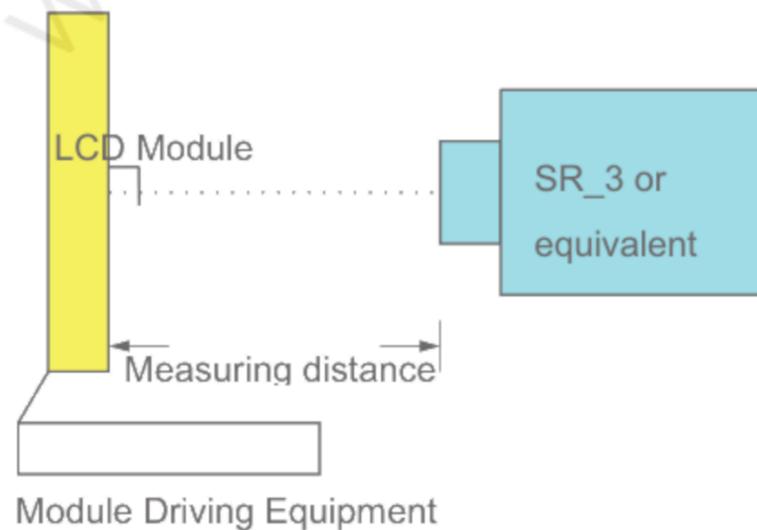

Note 2: Definition of 9 points position

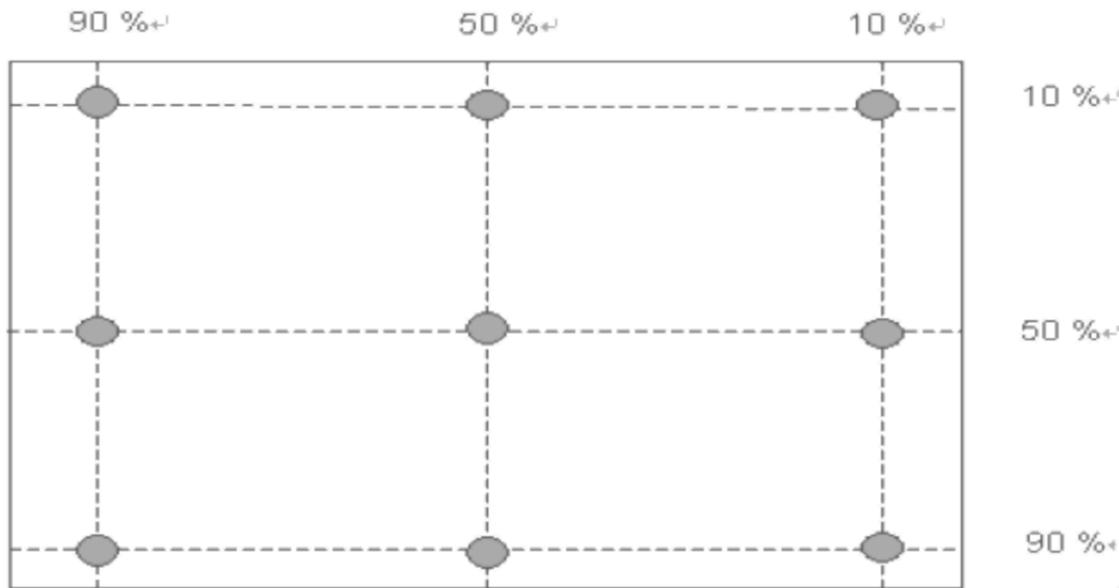

Note 3: Definition of luminance uniformity of 9 points.


$$\delta_{W9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4: Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$

Note 5: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "White" to "Black" (falling time) and from "Black" to "White" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

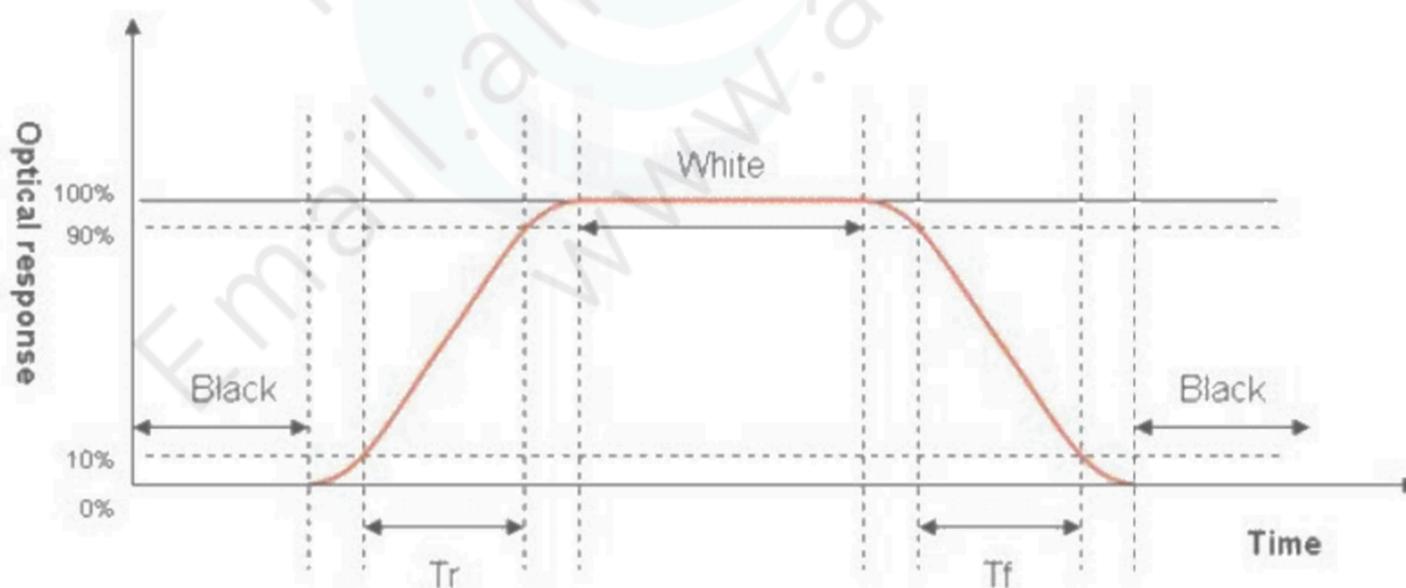

Note 6: Definition of viewing angle

Viewing angle is the measurement of contrast ratio  $\geq 10$ , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° ( $\theta$ ) horizontal left and right, and 90° ( $\Phi$ ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement

viewing angle.

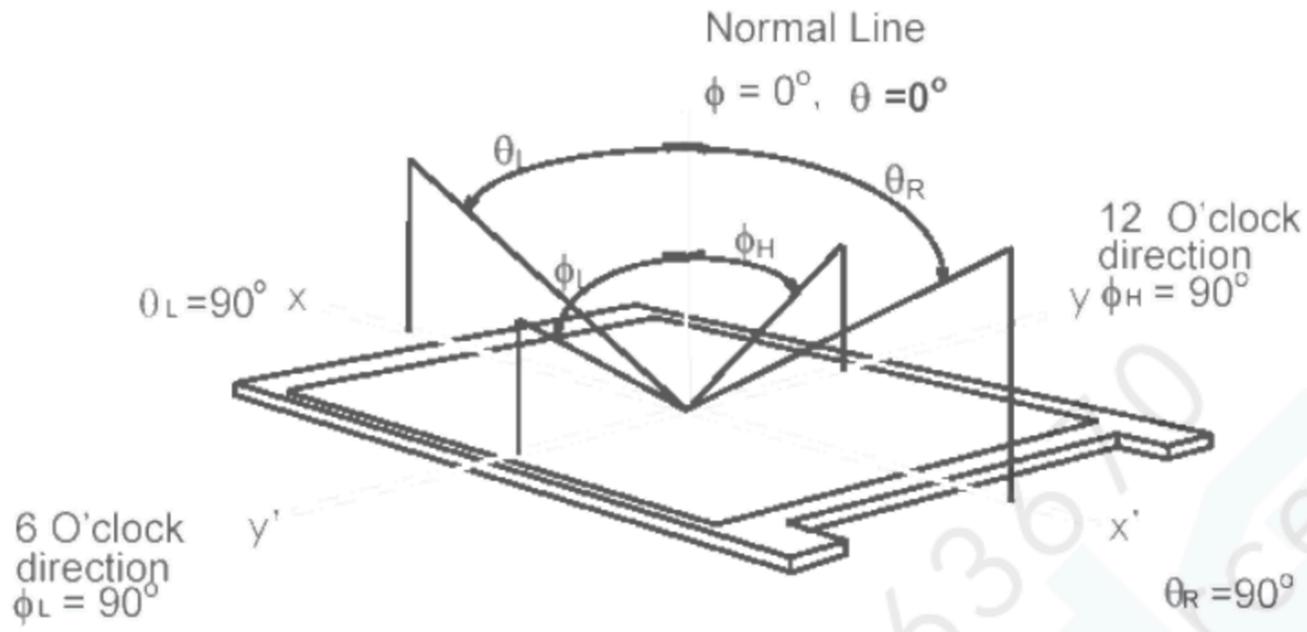

$\theta_L = 90^\circ$  x

12 O'clock direction  
y  $\phi_H = 90^\circ$

6 O'clock direction  
 $\phi_L = 90^\circ$

$\theta_R = 90^\circ$


y'

x'

Tel: +86 13728663610  
www.andesource.com  
Email: andeic@andesource.com

### 3. Functional Block Diagram

The following diagram shows the functional block of the 27.0 inch color TFT/LCD module:

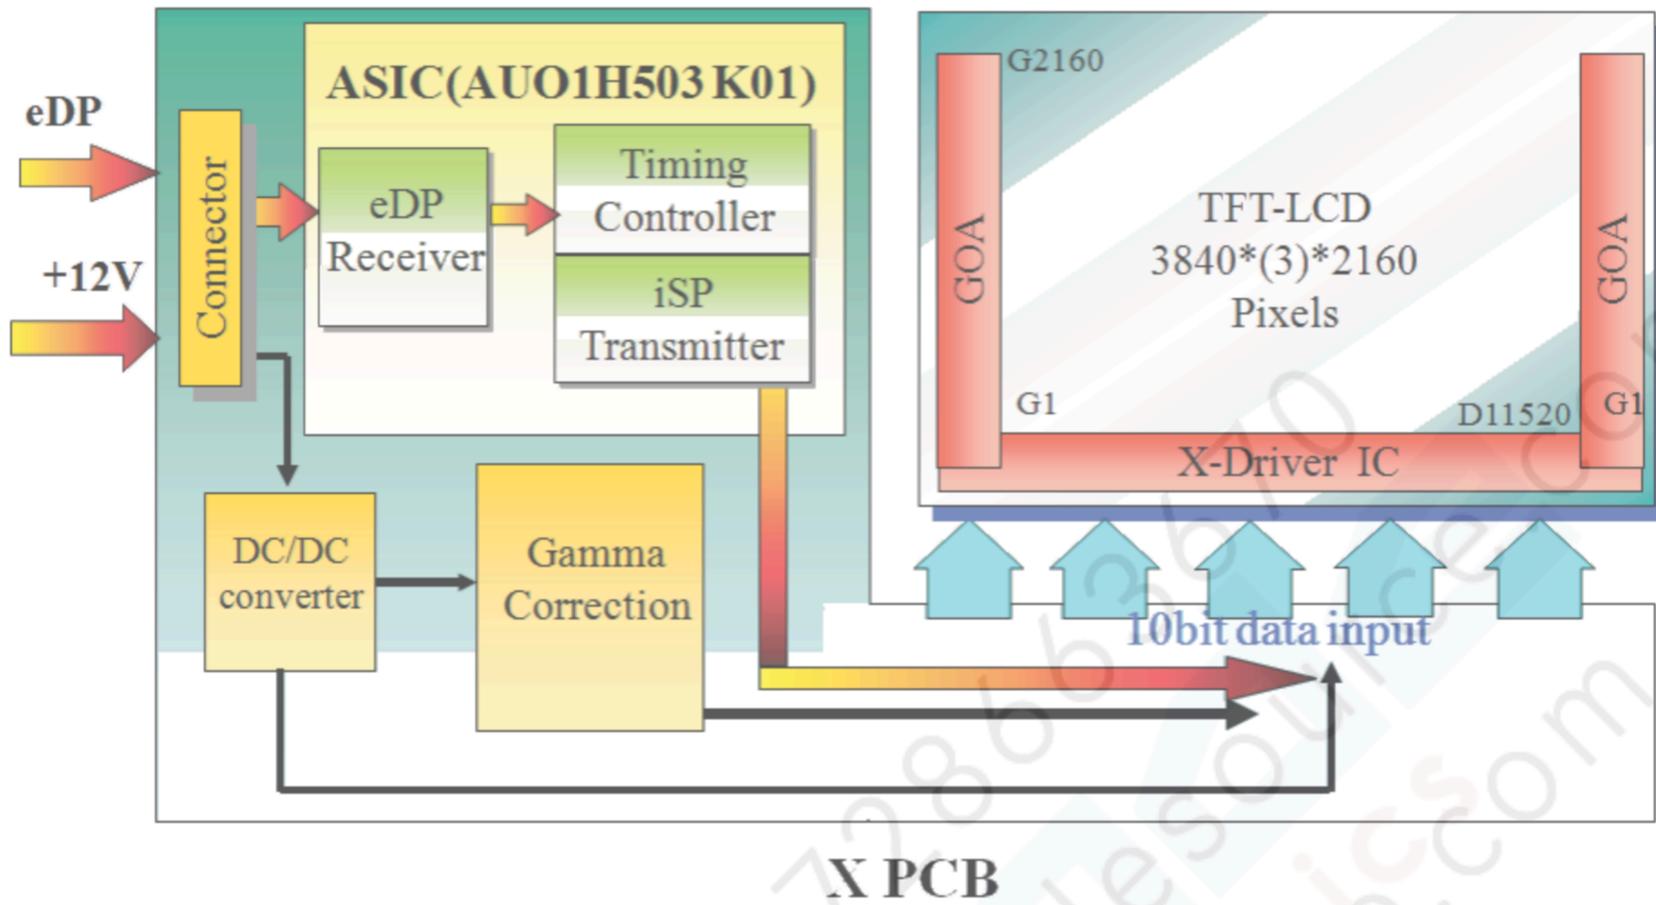

## 4. Absolute Maximum Ratings


### 4.1 Absolute Ratings of TFT LCD Module

Item	Symbol	Min	Max	Unit
Logic/LCD drive Voltage	Vin	GND-0.3	14	[Volt]

### 4.2 Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit
Operating Temperature	TOP	0	+50	[°C]
Operation Humidity	HOP	5	90	[%RH]
Storage Temperature	TST	-20	+60	[°C]
Storage Humidity	HST	5	90	[%RH]

Note: Maximum Wet-Bulb should be 39 °C and no condensation.

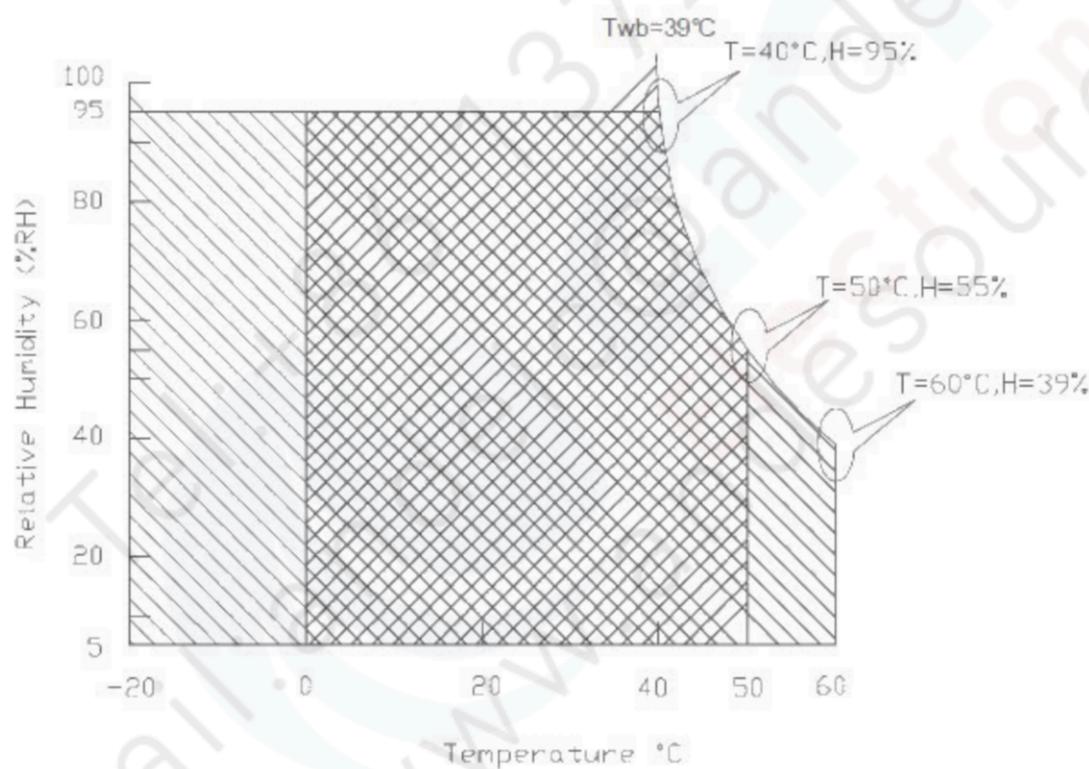

Operating Range Storage Range +

## 5. Electrical Characteristics



### 5.1 TFT LCD Module

#### 5.1.1 Power Specification

Input power specifications are shown as follows;

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Power supply Input voltage	10.8	12.0	13.2	[Volt]	
IDD	Power supply Input Current (RMS)	-	0.90	1.08	[A]	VDD= 12.0V, White pattern, Fv=60Hz
IRush	Inrush Current	-	-	3.0	[A]	<b>Note 1</b>
PDD	VDD Power Consumption	-	10.8	11.88	[Watt]	VDD= 12.0V , White pattern, Fv=60Hz
VDDrp	Allowable VDD Ripple Voltage	-	-	VDD* 5%	[mV]	VDD= 12.0V, White pattern, Fv=60Hz

Note 1: Measurement condition:

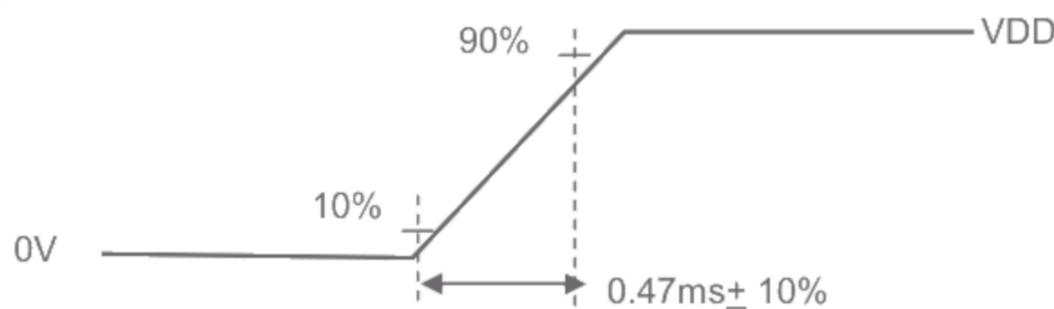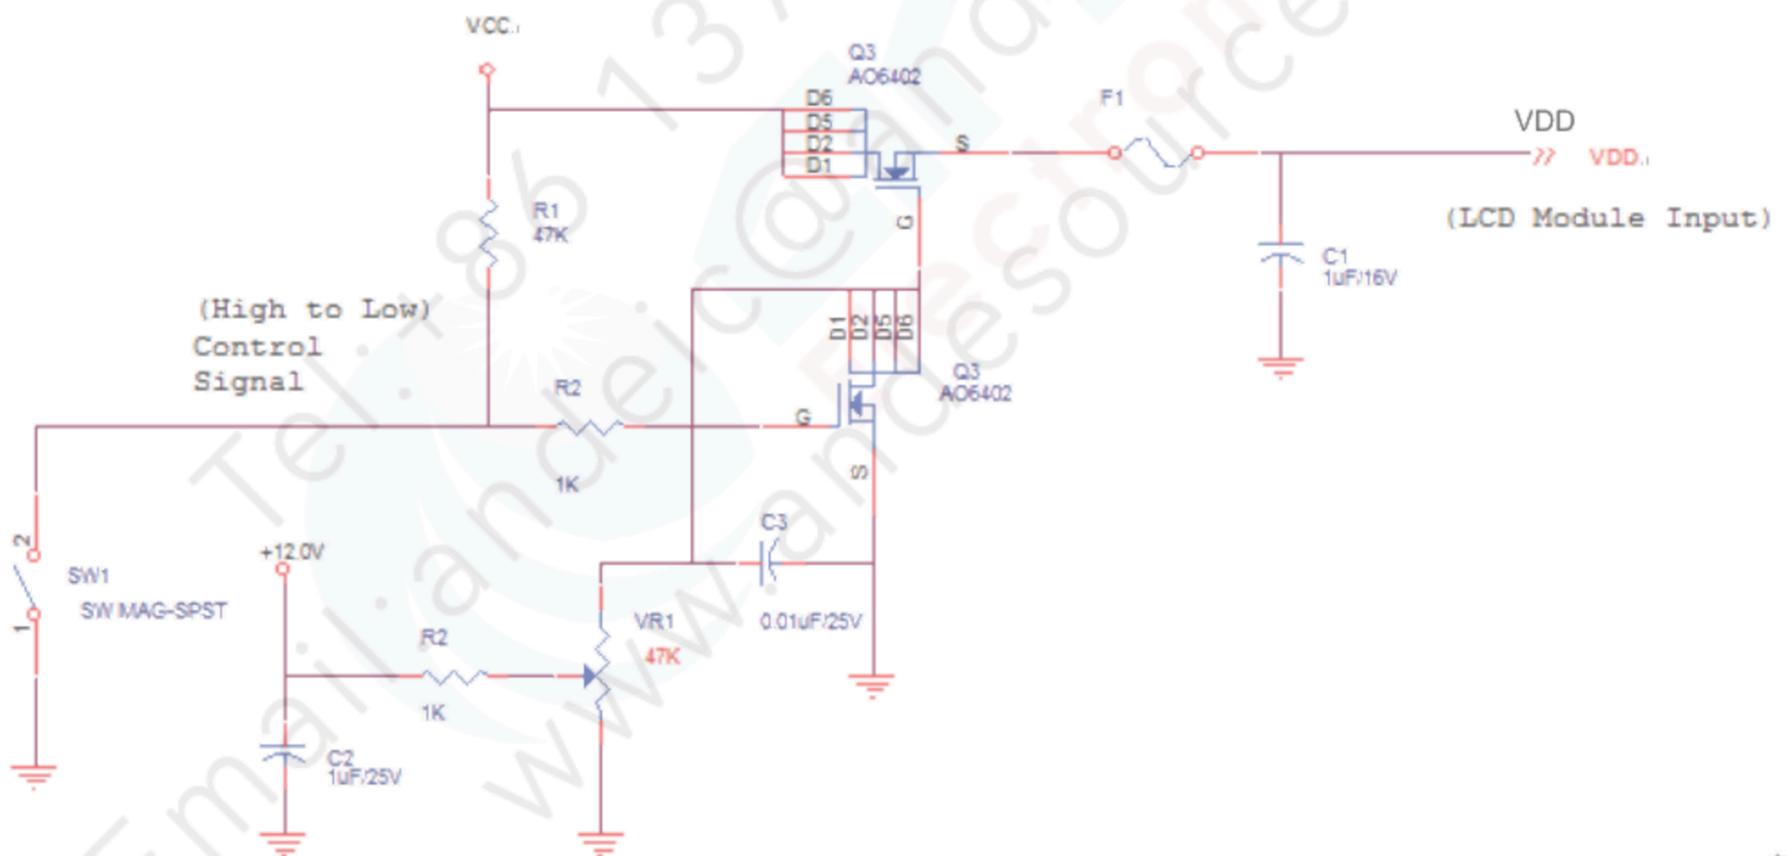


VDD rising time

### 5.1.2 eDP Electrical Characteristics

Follow as VESA Display Port Standard Version 1.2


a. Display Port main link signal:

DisplayPort main link					
		Min	Typ	Max	unit
VCM	RX input DC Common Mode Voltage	0	-	2.0	V
VDiff <sub>P-P</sub>	Peak-to-peak Voltage at a receiving Device	150	-	-	mV

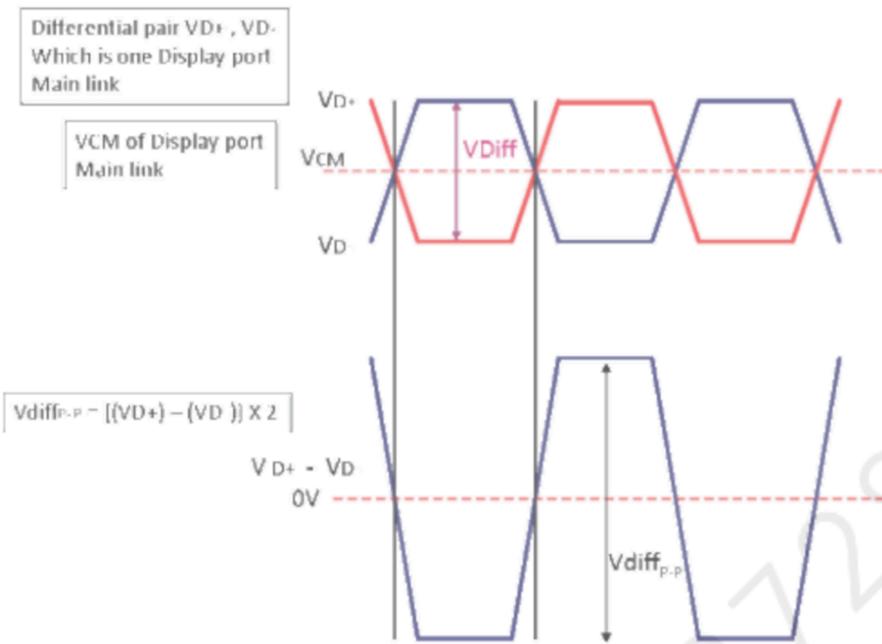

b. DisplayPort AUX\_CH signal:

DisplayPort AUX_CH					
		Min	Typ	Max	unit
VCM	AUX DC Common Mode Voltage	0	-	2.0	V
VDiff <sub>P-P</sub>	AUX Peak-to-peak voltage at a receiving device	0.27	-	1.36	V

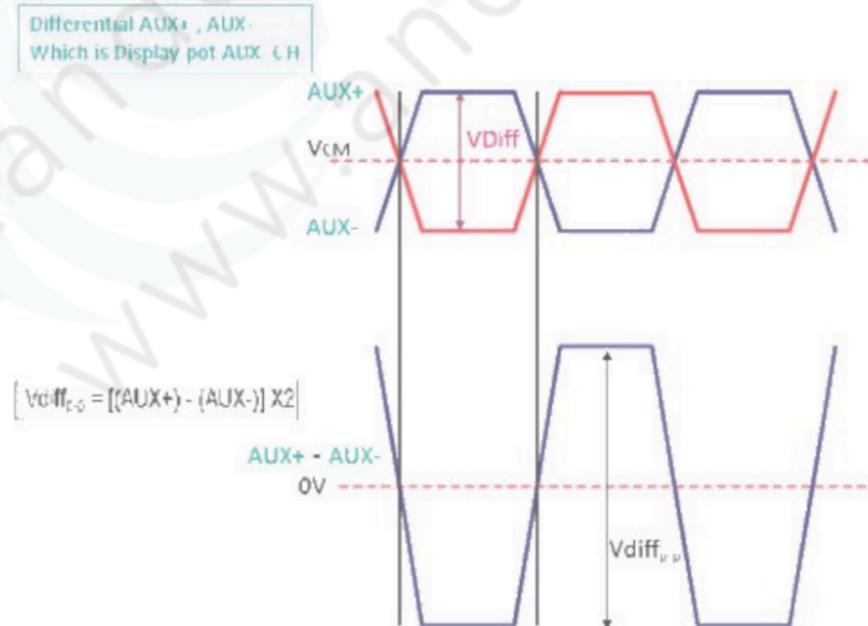

c. DisplayPort VHPD signal:

DisplayPort VHPD					
		Min	Typ	Max	unit
VHPD	HPD Voltage	2.25	-	3.6	V

## 5.2 Backlight Unit

### 5.2.1 LED Backlight Unit : Driver Connector

Backlight	manufacturer	JST
	part number	S14B-PH-SM6-K-TB(HF)
Mating	manufacturer	JST
	part number	PHR-14

### 5.2.2 Signal for LED connector

Pin #	Symbol	Pin Description
1	NC	Do not connect
2	Dimming	PWM; duty 10%~ 100%
3	EN	Enable(0V:disable, 2.5~5V:Enable)
4	NC	Do not connect
5	GND	GND
6	GND	GND
7	GND	GND
8	GND	GND
9	GND	GND
10	VDD	Power +24V
11	VDD	Power +24V
12	VDD	Power +24V
13	VDD	Power +24V
14	VDD	Power +24V

### 5.2.3 Backlight input signal characteristics

Following characteristics are measured under a stable condition using an inverter at 25°C (Room Temperature):

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
VDD	Input Voltage	21.6	24.0	26.4	[Volt]	
I <sub>VDD</sub>	Input Current		2.05	2.46	[A]	100% PWM Duty
P <sub>VDD</sub>	Power Consumption		49.20	59.04	[Watt]	100% PWM Duty
I <sub>rush LED</sub>	Inrush Current	-	-	6	[A]	at rising time=470us
F <sub>PWM</sub>	Dimming Frequency		0.2	20	[kHz]	
	Swing Voltage	3	3.3	5	V	
	Dimming Duty Cycle	10	-	100	%	
I <sub>F (one channel)</sub>	LED Forward Current		70		mA	Ta = 25°C
V <sub>F (one channel)</sub>	LED Forward Voltage	-	-	-	Volt	
		-	33	37.4	Volt	I <sub>F</sub> =70 mA, Ta = 25°C 10 channel/LB & 2 LB/Panel
		-	3.0	3.4		
P <sub>LED (One LB)</sub>	LED Power Consumption	-	23.1	26.18	Watt	I <sub>F</sub> =70 mA, Ta = 25°C LBx2 : 26.18x2=52.36(Max)
LED Lifetime		50,000			Hrs	I <sub>F</sub> =70 mA, Ta= 25°C

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: VDD, P<sub>VDD</sub>, P<sub>VDD</sub>, I<sub>rush LED</sub> are defined for LED B/L.(100% duty of PWM dimming)

Note 3: I<sub>F</sub>, V<sub>F</sub> are defined for one channel LED. There are ten LED channels in one light bar. P<sub>LED</sub> is defined for one light bar. For G270ZAN01.4, there are two light bars in back light unit.

Note 4: If G270ZAN01.4 module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.


Note 5: The LED life-time is estimated data. And is defined when a single LED operated in room temperature, the estimated time to 50% degradation of initial luminous.

Note 6: Only one kind types for adjusting brightness: PWM .

## 6. Signal Characteristic

### 6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

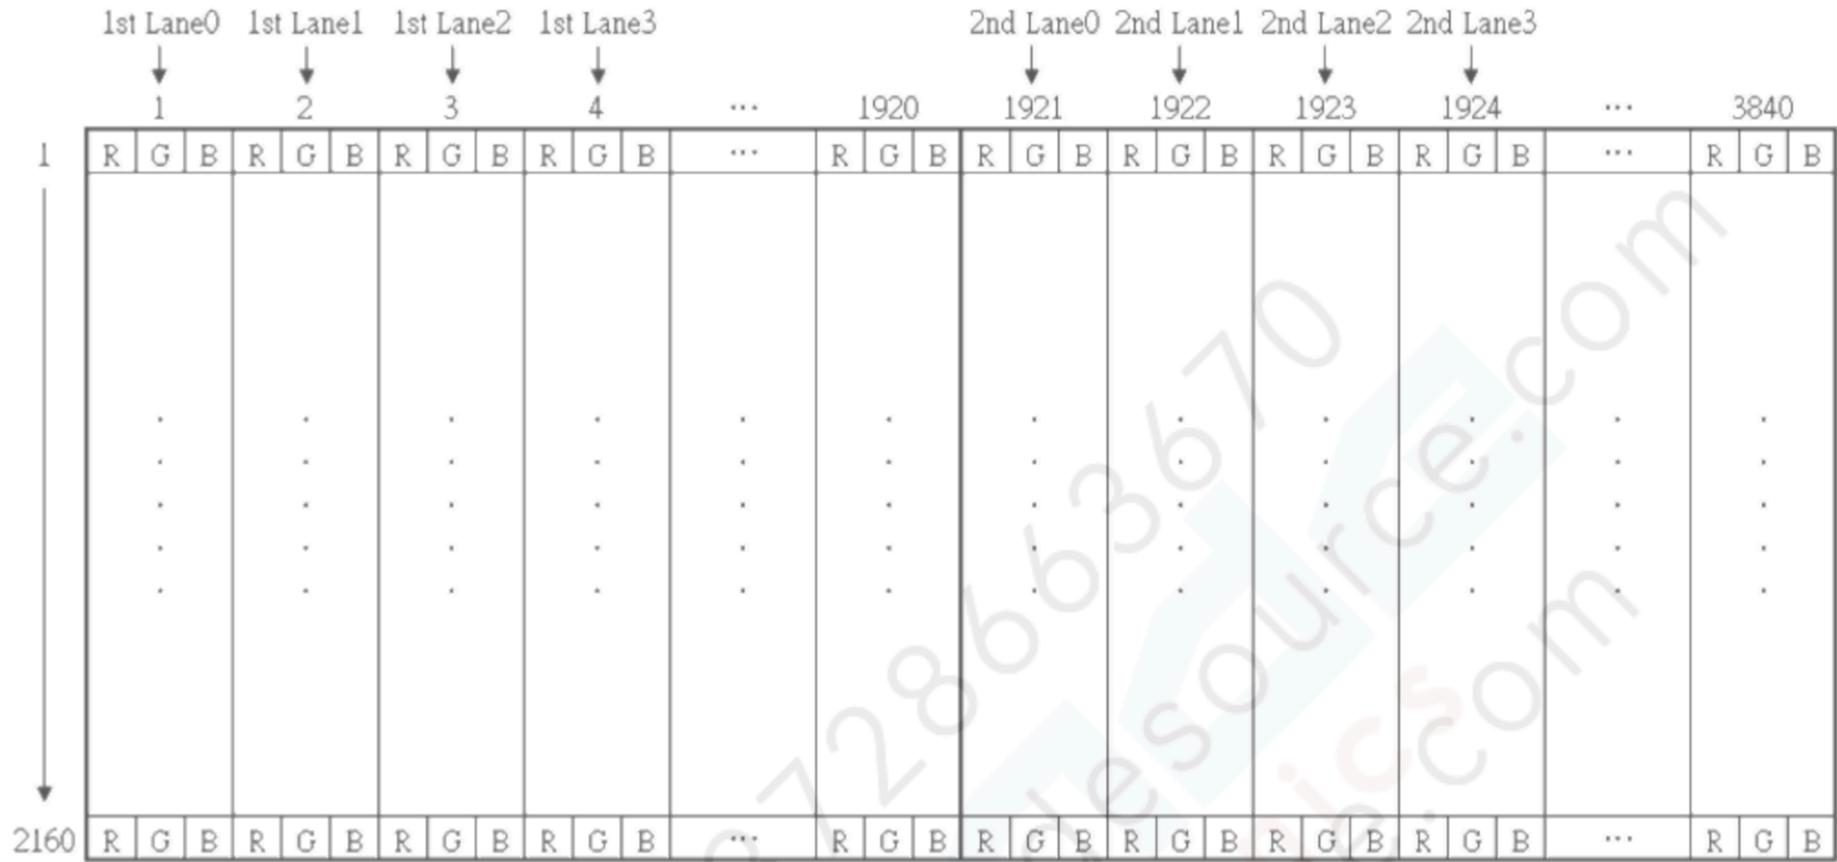

**Note:** The module use 8-Lanes eDP interface.

1<sup>st</sup> port:

1<sup>st</sup> Lane0 :  $1+4n$  pixel

1<sup>st</sup> Lane1 :  $2+4n$  pixel

1<sup>st</sup> Lane2 :  $3+4n$  pixel

1<sup>st</sup> Lane3 :  $4+4n$  pixel

2<sup>nd</sup> port:

2<sup>nd</sup> Lane0 :  $1921+4n$  pixel

2<sup>nd</sup> Lane1 :  $1922+4n$  pixel

2<sup>nd</sup> Lane2 :  $1923+4n$  pixel

2<sup>nd</sup> Lane3 :  $1924+4n$  pixel

$n=0\sim 479$

## 6.2 Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.



Tel: +86 13728663670  
Email: andeic@andesource.com  
www.andelectronics.com

### 6.3 Signal Description

The module uses a LVDS receiver embedded in AUO's ASIC. LVDS is a differential signal technology for LCD interface and a high-speed data transfer device.

#### 6.3.1 TFT LCD Module: LVDS Connector

Connector Name / Designation	Signal Connector
Manufacturer	JAE
Connector Model Number	FI-RTE51S-HF
Adaptable Plug	FI-RE51CL

PIN #	Symbol	Description
1	VDD	Power +12V
2	VDD	Power +12V
3	VDD	Power +12V
4	VDD	Power +12V
5	VDD	Power +12V
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	NC	No connection (for AUO test only. Do not connect)
10	NC	No connection (for AUO test only. Do not connect)
11	NC	No connection (for AUO test only. Do not connect)
12	NC	No connection (for AUO test only. Do not connect)
13	NC	No connection (for AUO test only. Do not connect)
14	NC	No connection (for AUO test only. Do not connect)
15	NC	No connection (for AUO test only. Do not connect)
16	NC	No connection (for AUO test only. Do not connect)
17	GND	Ground
18	1st Lane3_N	Negative eDP differential data input
19	1st Lane3_P	Positive eDP differential data input
20	GND	Ground
21	1st Lane2_N	Negative eDP differential data input
22	1st Lane2_P	Positive eDP differential data input
23	GND	Ground
24	1st Lane1_N	Negative eDP differential data input
25	1st Lane1_P	Positive eDP differential data input
26	GND	Ground
27	1st Lane0_N	Negative eDP differential data input
28	1st Lane0_P	Positive eDP differential data input

29	GND	Ground
30	1st AUX_CH_P	Positive AUX Channel differential data input
31	1st AUX_CH_N	Negative AUX Channel differential data input
32	GND	Ground
33	NC	No connection (for AUO test only. Do not connect)
34	GND	Ground
35	2nd Lane3_N	Negative eDP differential data input
36	2nd Lane3_P	Positive eDP differential data input
37	GND	Ground
38	2nd Lane2_N	Negative eDP differential data input
39	2nd Lane2_P	Positive eDP differential data input
40	GND	Ground
41	2nd Lane1_N	Negative eDP differential data input
42	2nd Lane1_P	Positive eDP differential data input
43	GND	Ground
44	2nd Lane0_N	Negative eDP differential data input
45	2nd Lane0_P	Positive eDP differential data input
46	GND	Ground
47	2nd AUX_CH_P	Positive AUX Channel differential data input
48	2nd AUX_CH_N	Negative AUX Channel differential data input
49	GND	Ground
50	HPD	Hot plug detection
51	GND	Ground

Note 1: Input Signals shall be in low status when VDD is off.

Note 2: High stands for "3.3V", Low stands for "0V", NC means "No Connection".

Note 3: RSV means "Reserved".



## 6.4 The Input Data Format

### 6.4.1 eDP Data Format

1st Lane0	1st Lane1	1st Lane2	1st Lane3	2nd Lane0	2nd Lane1	2nd Lane2	2nd Lane3
R1-9:2	R2-9:2	R3-9:2	R4-9:2	R1921-9:2	R1922-9:2	R1923-9:2	R1924-9:2
R1-1:0IG1-9:4	R2-1:0IG2-9:4	R3-1:0IG3-9:4	R4-1:0IG4-9:4	R1921-1:0IG1921-9:4	R1922-1:0IG1922-9:4	R1923-1:0IG1923-9:4	R1924-1:0IG1924-9:4
G1-3:0IB1-9:6	G2-3:0IB2-9:6	G3-3:0IB3-9:6	G4-3:0IB4-9:6	G1921-3:0IB1921-9:6	G1922-3:0IB1922-9:6	G1923-3:0IB1923-9:6	G1924-3:0IB1924-9:6
B1-5:0IR5-9:8	B2-5:0IR6-9:8	B3-5:0IR7-9:8	B4-5:0IR8-9:8	B1921-5:0IR1921-9:8	B1922-5:0IR1922-9:8	B1923-5:0IR1923-9:8	B1924-5:0IR1924-9:8
R5-7:0	R6-7:0	R7-7:0	R8-7:0	R1925-7:0	R1926-7:0	R1927-7:0	R1928-7:0
G5-9:2	G6-9:2	G7-9:2	G8-9:2	G1925-9:2	G1926-9:2	G1927-9:2	G1928-9:2
G5-1:0IB5-9:4	G6-1:0IB6-9:4	G7-1:0IB7-9:4	G8-1:0IB8-9:4	G1925-1:0IB1925-9:4	G1926-1:0IB1926-9:4	G1927-1:0IB1927-9:4	G1928-1:0IB1928-9:4
B5-3:0IR9-9:6	B6-3:0IR10-9:6	B7-3:0IR11-9:6	B8-3:0IR12-9:6	B1925-3:0IR1925-9:6	B1926-3:0IR1926-9:6	B1927-3:0IR1927-9:6	B1928-3:0IR1928-9:6
R9-5:0IG9-9:8	R10-5:0IG10-9:8	R11-5:0IG11-9:8	R12-5:0IG12-9:8	R1929-5:0IG1929-9:8	R1930-5:0IG1930-9:8	R1931-5:0IG1931-9:8	R1932-5:0IG1932-9:8
G9-7:0	G10-7:0	G11-7:0	G12-7:0	G1929-7:0	G1930-7:0	G1931-7:0	G1932-7:0
B9-9:2	B10-9:2	B11-9:2	B12-9:2	B1929-9:2	B1930-9:2	B1931-9:2	B1932-9:2
B9-1:0IR13-9:4	B10-1:0IR14-9:4	B11-1:0IR15-9:4	B12-1:0IR16-9:4	B1929-1:0IR1929-9:4	B1930-1:0IR1930-9:4	B1931-1:0IR1931-9:4	B1932-1:0IR1932-9:4
R13-3:0IG13-9:6	R14-3:0IG14-9:6	R15-3:0IG15-9:6	R16-3:0IG16-9:6	R1933-3:0IG1933-9:6	R1934-3:0IG1934-9:6	R1935-3:0IG1935-9:6	R1936-3:0IG1936-9:6
G13-5:0IB13-9:8	G14-5:0IB14-9:8	G15-5:0IB15-9:8	G16-5:0IB16-9:8	G1933-5:0IB1933-9:8	G1934-5:0IB1934-9:8	G1935-5:0IB1935-9:8	G1936-5:0IB1936-9:8
B13-7:0	B14-7:0	B15-7:0	B16-7:0	B1933-7:0	B1934-7:0	B1935-7:0	B1936-7:0
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.


### 6.4.2 Color versus Input Data

The following table is for color versus input data (10bit). The higher the gray level, the brighter the color.

Color	Gray Level	Color Input Data																												Remark	
		RED data (MSB:R9, LSB:R0)										GREEN data (MSB:G9, LSB:G0)										BLUE data (MSB:B9, LSB:B0)									
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2		B1
Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
L511	-	0	1	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	
Red	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
Green	L1023	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
Blue	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
Blue	L1023	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	

### 6.4.3 Input Timing Diagram

(Lane0~7 eDP data:1, 2, 3, 4, 1921, 1922, 1923, 1924)

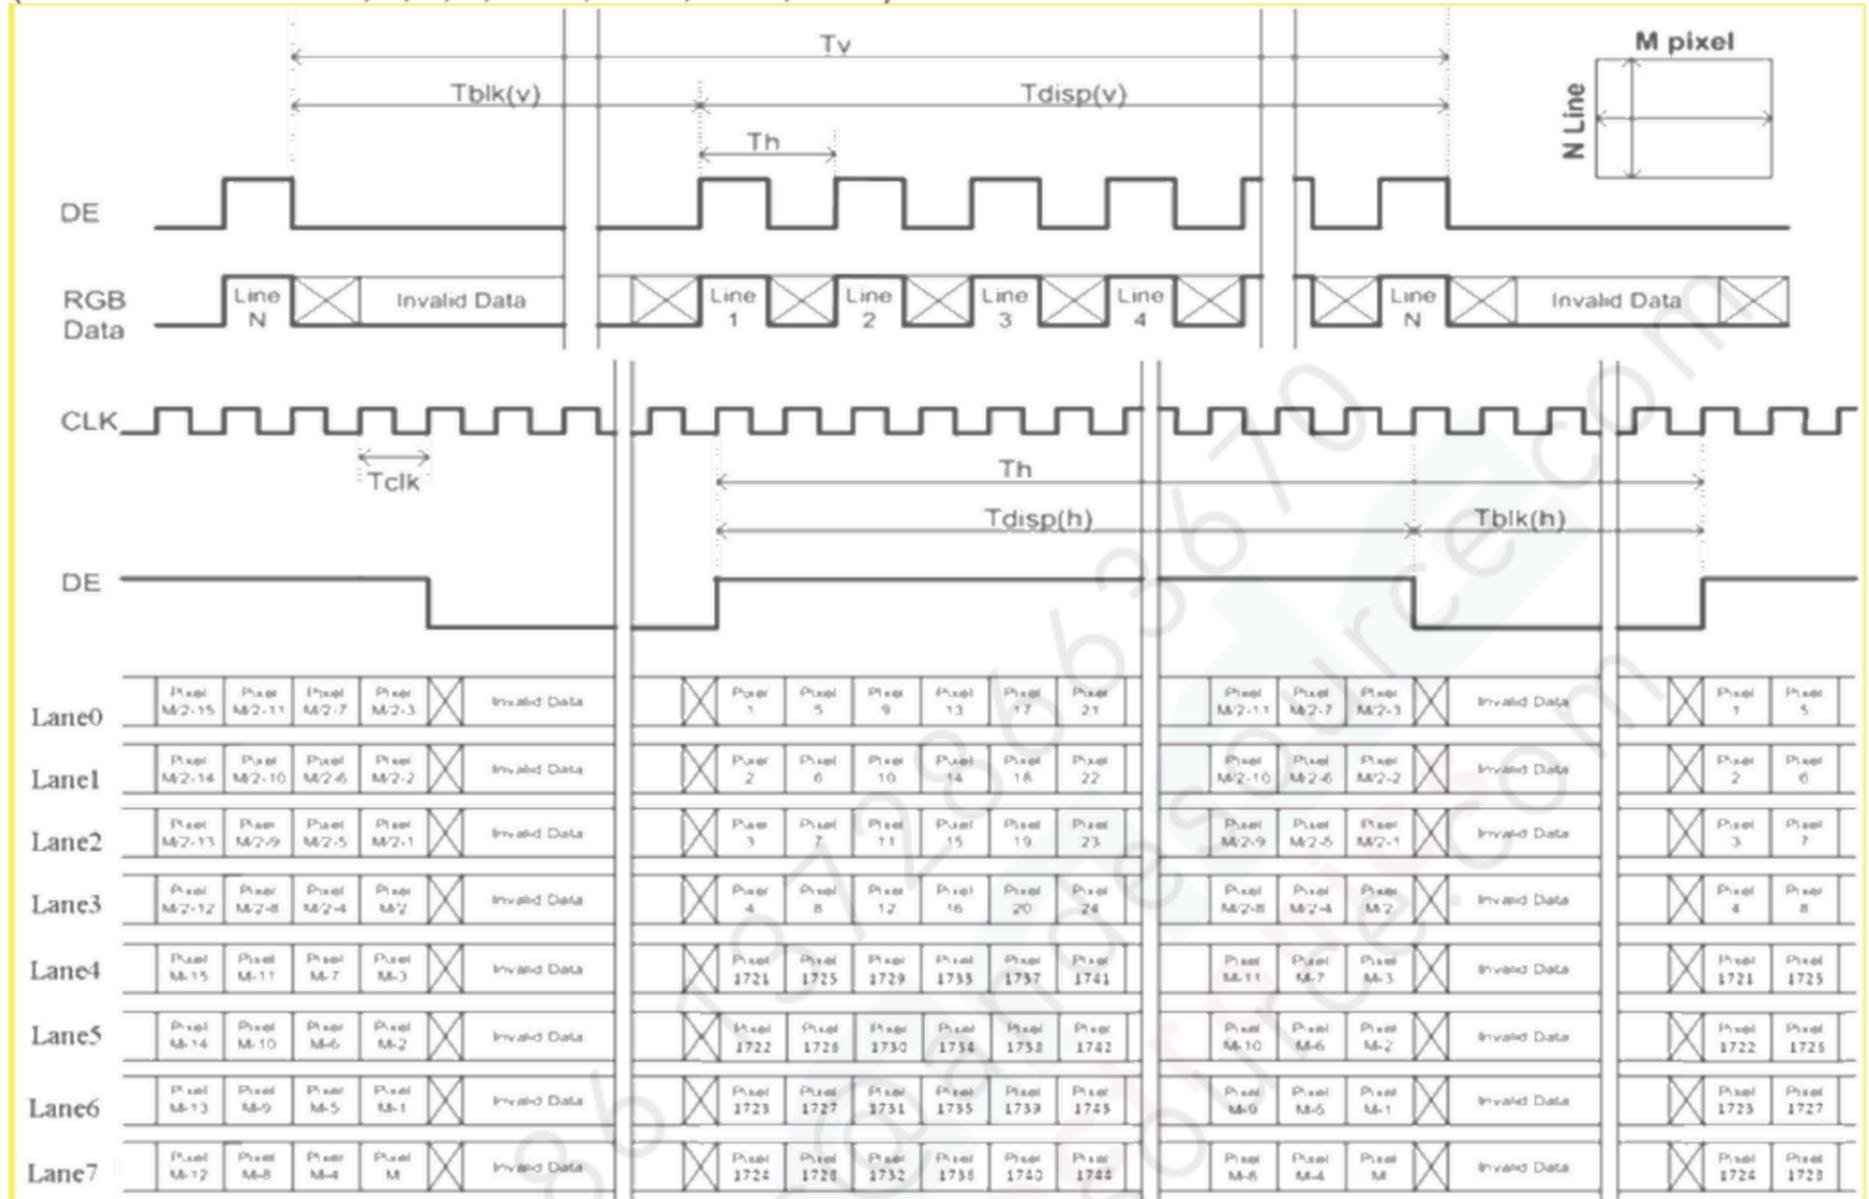

## 6.5 Interface Timing

### 6.5.1 Timing Characteristics

The input timing is shown as the following table.

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
Tv	Vertical Section	Period	2180	2200	4500	Th	
Tdisp (v)		Active	2160	2160	2160	Th	
Tblk (v)		Blanking	20	40	2340	Th	
Fv		Frequency	29	60	65	Hz	<b>Note 6-6</b> <b>Note 6-7</b>
Th	Horizontal Section	Period	2000	2100	3520	Tclk	
Tdisp (h)		Active	1920	1920	1920	Tclk	
Tblk (h)		Blanking	80	180	1600	Tclk	
Fh		Frequency	40	132	151	kHz	<b>Note 6-4</b>
Tclk	Pixel Clock	Period	3.330	3.608	12.500	ns	1/Fclk
Fclk		Frequency	80	277	300.3	MHz	<b>Note 6-5</b>
Link Rate per Lane			2.7		Gbps	<b>2180</b>	

**Note 6-4:** The equation is listed as following. Please don't exceed the above recommended value.

$$\begin{aligned} Fh (\text{Min.}) &= Fclk (\text{Min.}) / Th (\text{Min.}) \\ Fh (\text{Typ.}) &= Fclk (\text{Typ.}) / Th (\text{Typ.}) \\ Fh (\text{Max.}) &= Fclk (\text{Max.}) / Th (\text{Min.}) \end{aligned}$$

**Note 6-5:** The equation is listed as following. Please don't exceed the above recommended value.

$$\begin{aligned} &1\text{st Lane N \& 2nd Lane N skew} < 200\text{ns} \\ Fclk (\text{Typ.}) &= Fv (\text{Typ.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.}) \\ Fclk (\text{Min.}) &\leq Fv \times Th \times Tv \leq Fclk (\text{Max.}) \end{aligned}$$


**Note 6-6:** The equation is listed as following. Please don't exceed the above recommended value.

$$Fv = Fclk(\text{Typ.}) / (Tv \times Th)$$

**Note 6-7:** The optimal Vertical Frequency is 50~65 Hz for best picture quality.

### 6.6 Power ON/OFF Sequence

VDD power and lamp on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

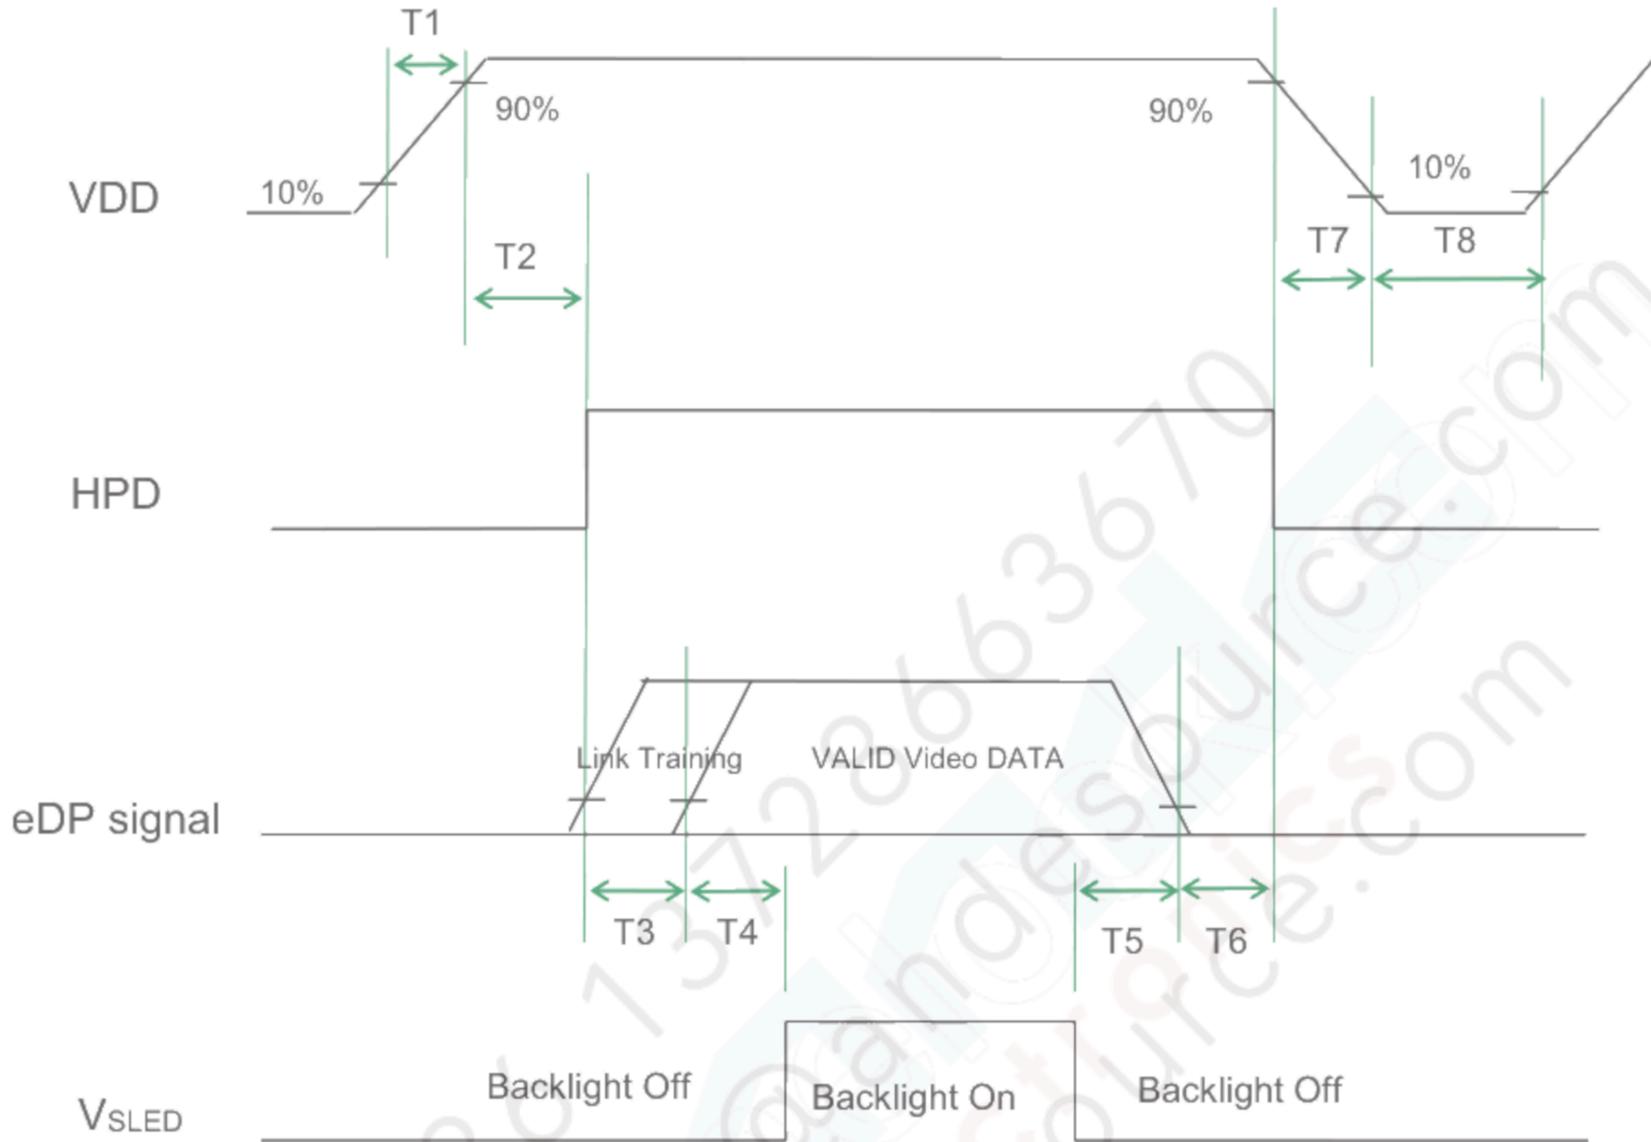

**Power ON/OFF sequence timing**

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
T1	0.5	-	10	[ms]	
T2	0	-	200	[ms]	
T3	0	-	-	[ms]	
T4	500	-	-	[ms]	
T5	100	-	-	[ms]	
T6	0	-	50	[ms]	
T7	0	-	200	[ms]	
T8	1000	-	-	[ms]	

*Note:* The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.

## 7. Reliability Test Criteria

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50°C, 300hours	
Low Temperature Operation (LTO)	Ta= 0°C, 300hours	
High Temperature Storage (HTS)	Ta= 60°C, 300hours	
Low Temperature Storage (LTS)	Ta= -20°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 G Wave: Random Frequency: 10 - 200Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 45.7 cm, package test	
Thermal Shock Test (TST)	-20 °C /30min, 60°C /30min, 100 cycles	<b>1</b>
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electrostatic Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω ) 1sec, 9 points, 25 times/ point.	<b>2</b>
	Air Discharge: ± 15KV, 150pF(330Ω ) 1sec 9 points, 25 times/ point.	
Altitude Test	Operation:10,000 ft	
	Non-Operation:30,000 ft	

**Note 1:** The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change.

- a. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again. Power is not applied during the test.
- b. After finish temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.


**Note 2:** According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost.  
Self-recoverable. No hardware failures.

**Note 3:**

- a. Water condensation is not allowed for each test items.
- b. Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- c. The reliability test is performed only to examine the TFT-LCD module capability.
- d. To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.

## 8. Mechanical Characteristics

### 8.1 LCM Outline Dimension

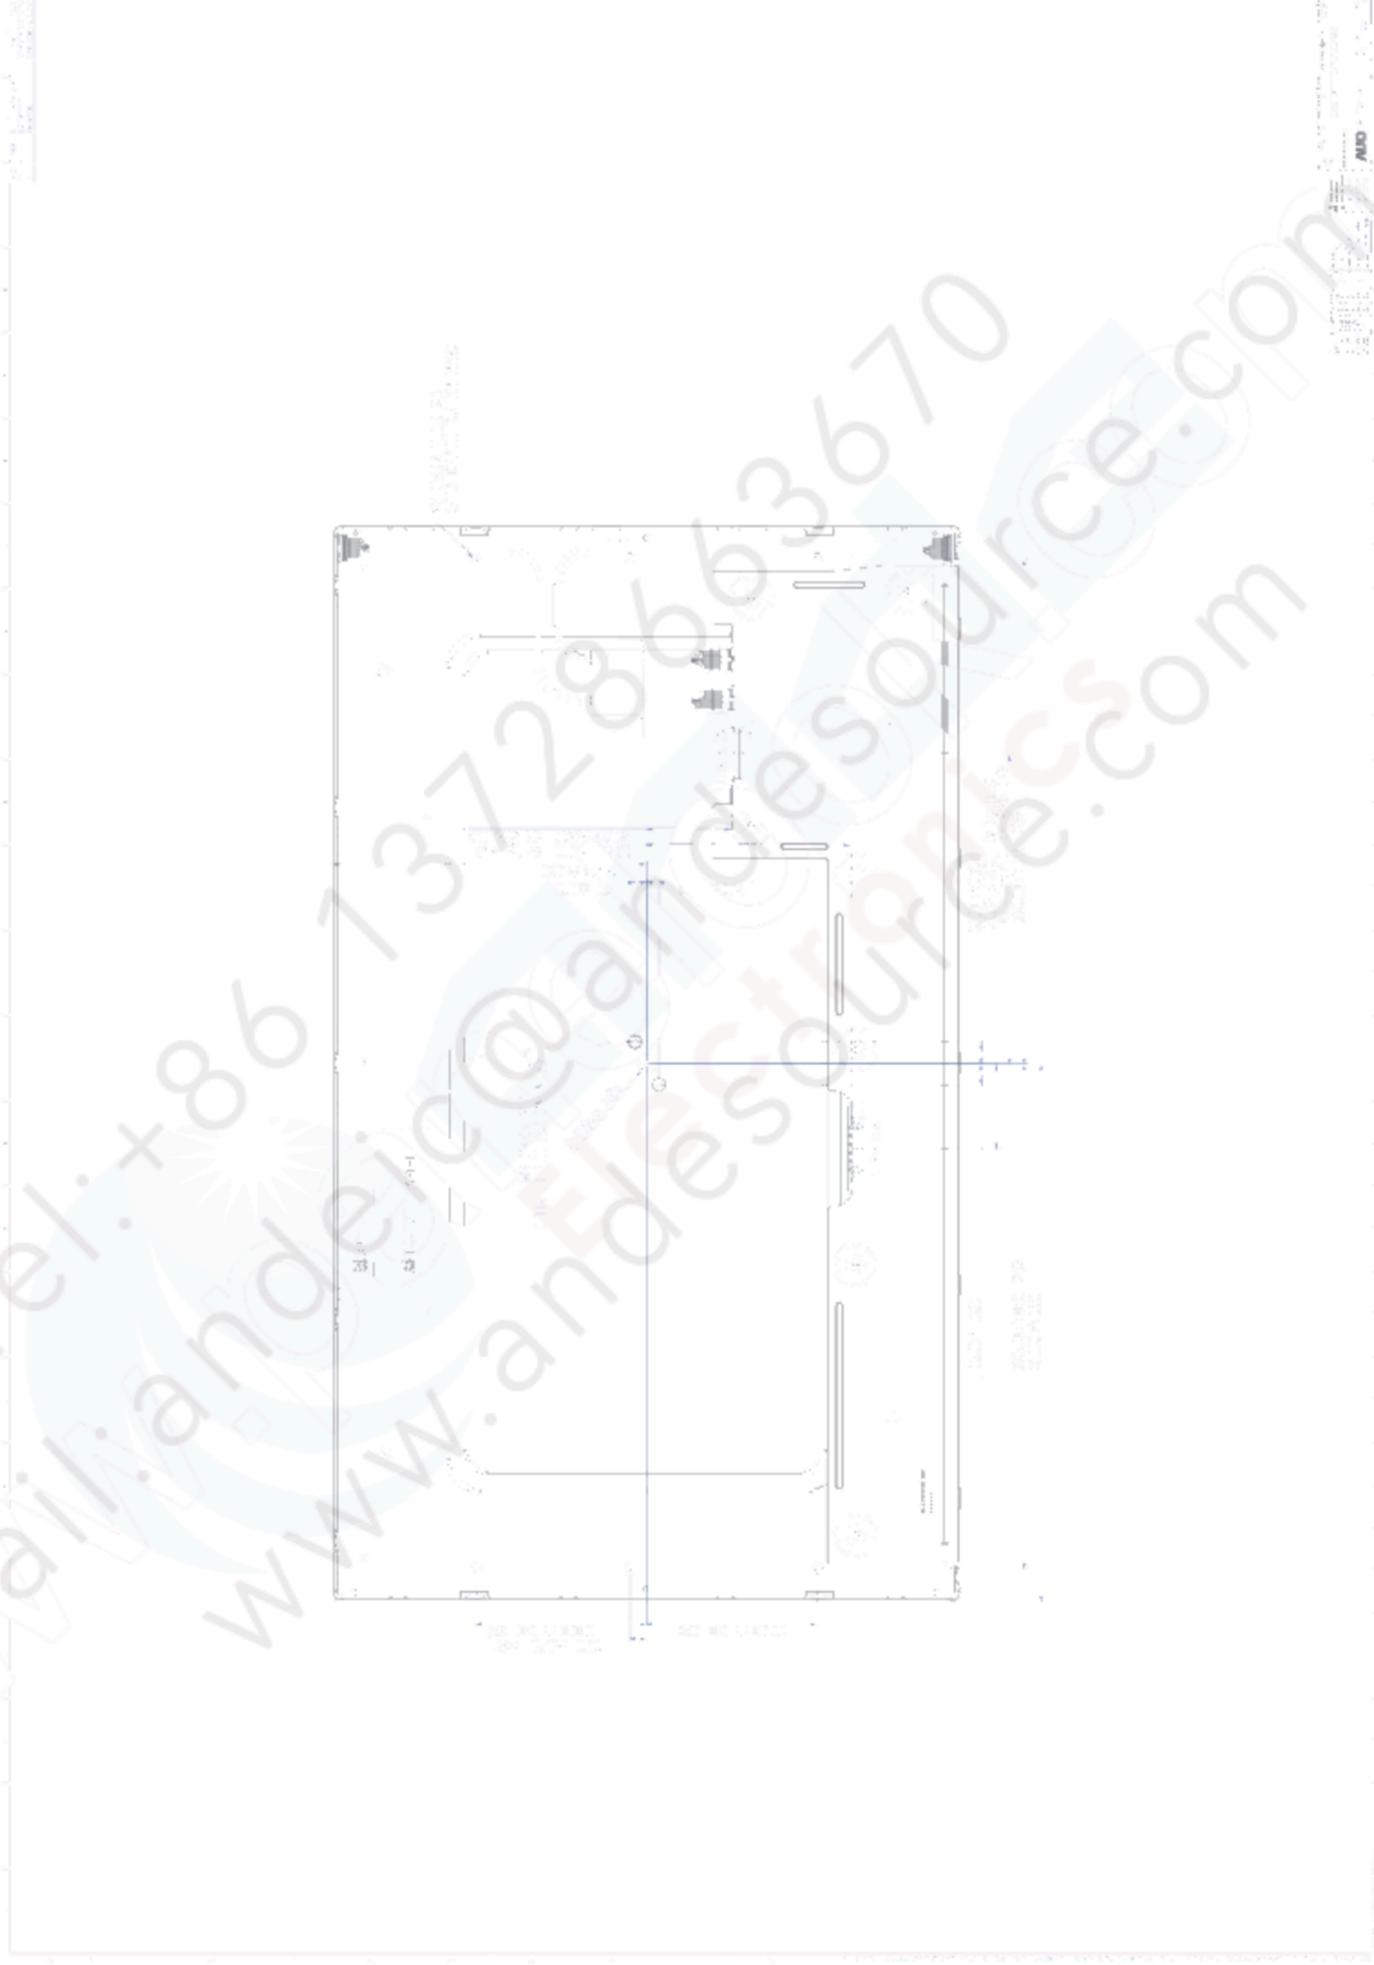



## 9. Label and Packaging

### 9.1 Shipping Label (on the rear side of TFT-LCD display)



Note 1: For Pb Free products, AUO will add for identification.


Note 2: For RoHS compatible products, AUO will add for identification.

Note 3: For China RoHS compatible products, AUO will add for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

Tel: +86 13728663610  
 Email: andeic@andesource.com  
 www.andelectronics.com

## 9.2 Carton Package

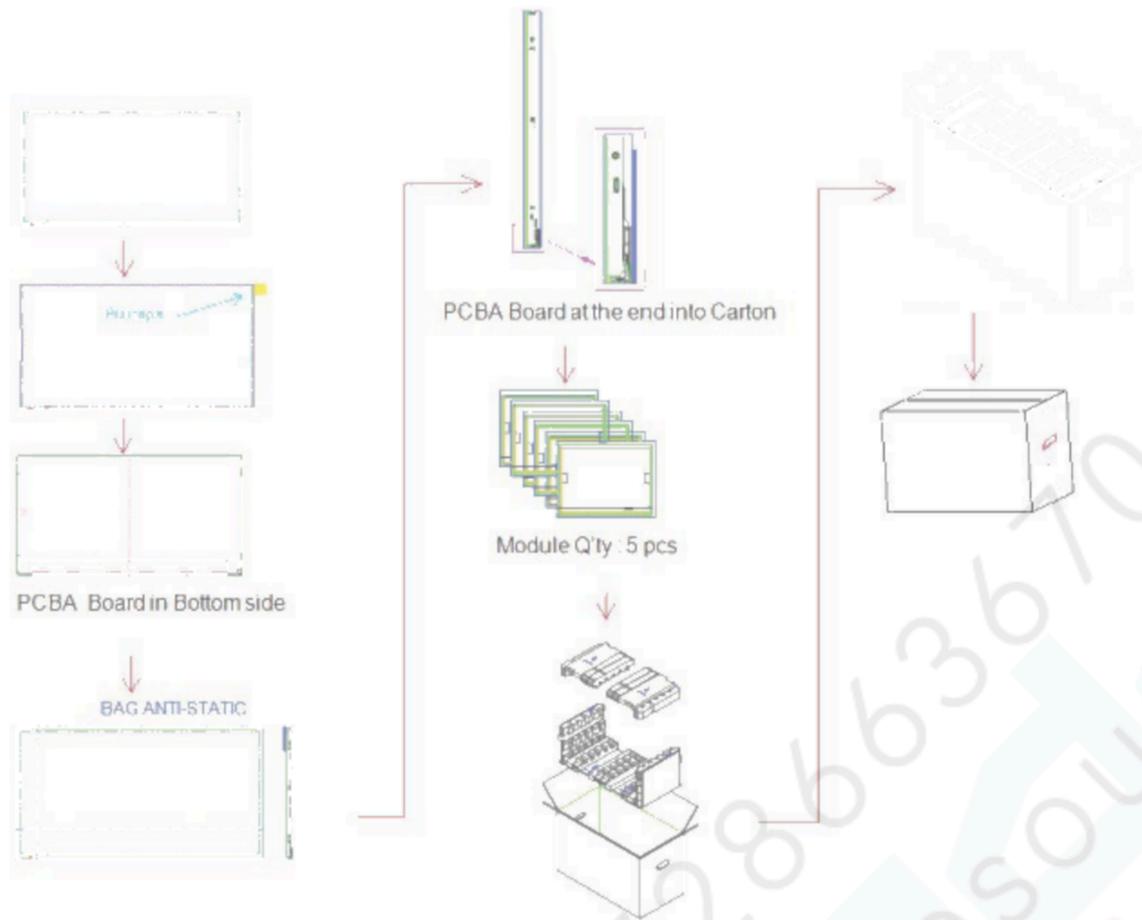

- Max capacity : 5 PCS TFT-LCD module per carton
- Max weight: 20 kg per carton
- Outside dimension of carton : 718mm(L) \* 375mm(W) \* 468mm(H)
- Pallet size : 1200 mm \* 800 mm \* 144mm
- Box stacked :  
 Module by air\_Max : (1 \*3) \*2 layers, one pallet put 6 boxes, total 30pcs module  
 Module by sea\_Max : (1\*3) \*2 layers + (1 \*3) \*2 layers, two pallet put 12 boxes, total 60pcs module  
 Module by sea\_HQ\_Max : (1\*3) \*2 layers+(1\*3) \*2 layers, two pallet put 12 boxes, total 60pcs module

## 10 Safety

### 10.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

### 10.2 Materials

#### 10.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

#### 10.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

### 10.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

### 10.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

UL 60950-1 second edition

U.S.A. Information Technology Equipment