

LM64K112

Large Size Graphic Type LCD Module
(FA/POS/Measuring instruments)

Features

- 15 cm [6"] VGA format
- Transflective B/W display
- Thin structure (5.8 mm) & lightweight (145 g)
- Wide temperature range
(Topr: 0°C to +50°C, Tstg: -25°C to +70°C)

Specifications


Parameter		Unit
Display size	15 [6]	cm ["]
Dot format (H x V)	640 x 480	dot
Dot Pitch (H x V)	0.19 x 0.19	mm
Active area (H x V)	121.6 x 91.2	mm
Panel type	DFSTN	-
Panel mode	Transflective	-
Color	B/W	-
Contrast ratio	13 : 1/15 : 1*1	-
Response Time	500	ms

*1...Contrast ratio : Reflective / Transmissive

Parameter		Unit
Brightness	60	cd/m ²
Duty Ratio	1/240	-
Backlight type	1CCFT(E)	-
Power consumption	1 400	mW
Outline dimensions (W x H x D _(max.))	167.7 x 122.8 x 5.8	mm
Weight	145	g
Operating temperature	0 to +50	°C
Storage temperature	-25 to +70	°C

Outline Dimensions

unit : mm

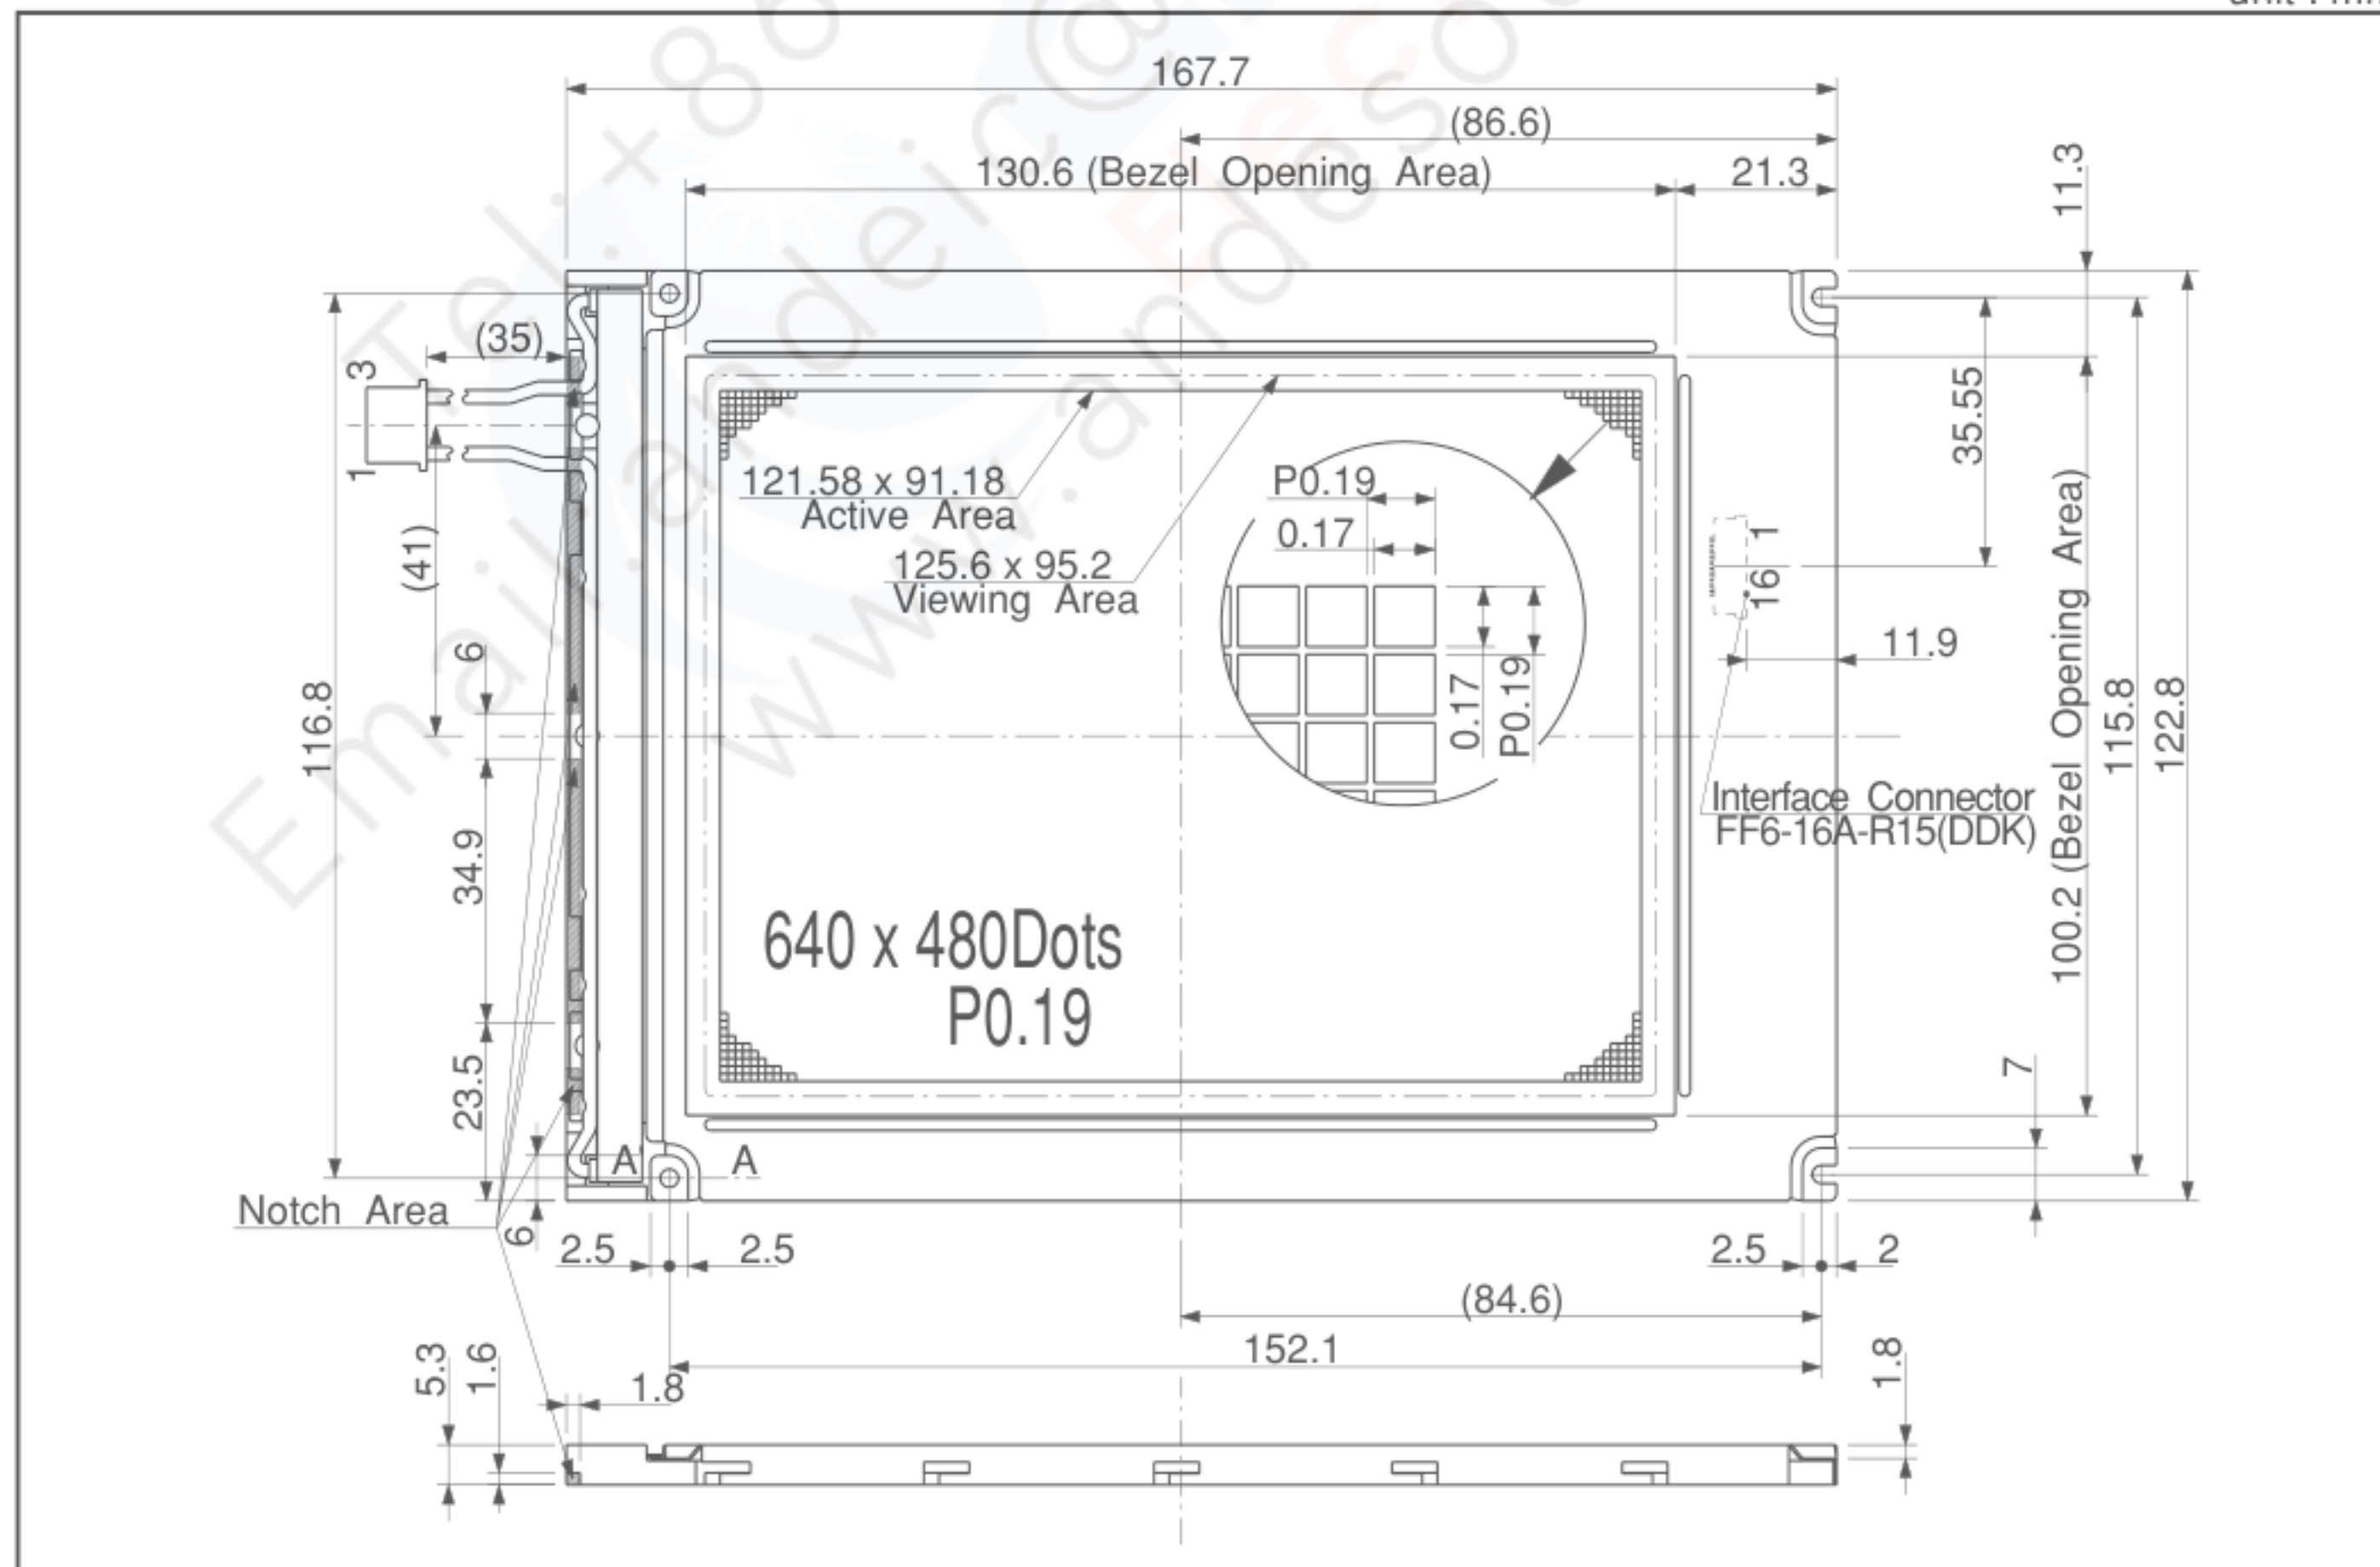

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP®

NORTH AMERICA

SHARP Microelectronics
of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (360) 834-2500
Fax: (360) 834-8903
<http://www.sharpsma.com>

EUROPE

SHARP Microelectronics Europe
Sonninstraße 3
20097 Hamburg, Germany
Phone: (49) 40 2376-2286
Fax: (49) 40 2376-2232
<http://www.sharpsme.com>

ASIA

SHARP Corporation
Integrated Circuits Group
2613-1 Ichinomoto-Cho
Tenri-City, Nara, 632, Japan
Phone: +81-743-65-1321
Fax: +81-743-65-1532
<http://www.sharp.co.jp>